



MANAHAU H3.1 Shiplap Technical Manual

CONTENTS

Technical Info

Product Warranty	3
Profiles	4
Storing Product	5
Building Code	6
Scope and Limitations of Use	6
Health & Safety	6
Fixing Detail	7
Terms & Conditions	8

Architectural Drawings

Drawing Notes	11
Architectural Drawings	14-61

PRODUCT WARRANTY

MANAHAU is Southern Pine's range of H3.1 treated and factory pre-primed, finger-jointed weatherboards. MANAHAU is manufactured from New Zealand Radiata Pine. This product is warranted for 15 years if used in accordance with the enclosed terms and conditions.



Southern Pine Products Ltd (SPP) warrants to replace and / or compensate for defective or substantial product failure subject to the claimant providing;

- proof that the product has been made, or supplied by, SPP and has failed or is substantially unfit for purpose
- timely written notification of the failure of the product (within 30 days of becoming apparent)
- reasonable evidence to indicate the product has been stored, installed and maintained in keeping with normal best practises and consistent with SPP instructions (as per SPP website and brochures)

Warranty is limited to replacement of product or cost value of product at SPP sole discretion and does not extend to any labour or consequential damage caused to other product. Such replacement will be considered full and final compensation.

Cladding and exterior products must be installed by a qualified builder (LBP).

H3.1 Treated MANAHAU 15 Year Limited Product Warranty

Inclusions:

- Southern Pine MANAHAU products
- Product delamination, splitting or breaking not for reasons excluded below
- Product decay or rot
- Gross manufacturing defects
- Incorrect profiling other than minor variations


Exclusions:

- Evidence that the product has not been correctly stored, installed or maintained. For example, product wet due to incorrect storage, incorrect fixing of weatherboards, failing to properly seal cut ends or punch nails, not applying paint in a timely manner etc.
- Extreme climate areas where regular maintenance has not been carried out such as coastal zones which may require regular washing, or high UV zones which may require more frequent re-painting
- Inappropriate product use that is not consistent with best practise. For example, H3.1 treated product placed in contact with the ground
- Product impacted by natural disasters
- Damage after purchase or delivery
- Fair wear and tear with regard to product's age and conditions of use


PROFILES

All SPP Shiplap weatherboard profiles have been machined to be compliant with NZS 3617 and BRANZ BU411.


Scale 1:2 at A4

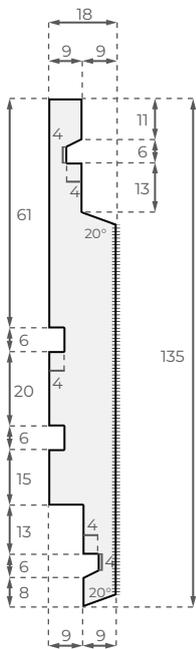


Shiplap 135x18
Bandsawn Face

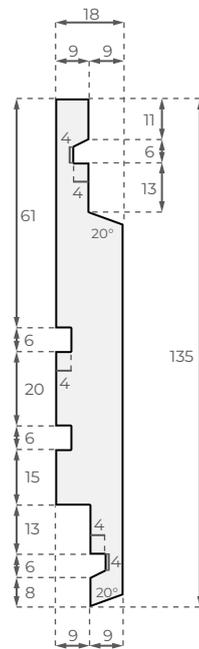

Shiplap 135x18
Dressed Face

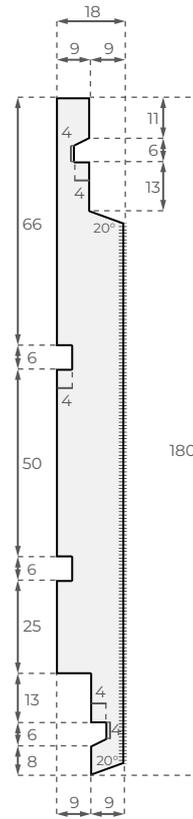

Shiplap 180x18
Bandsawn Face

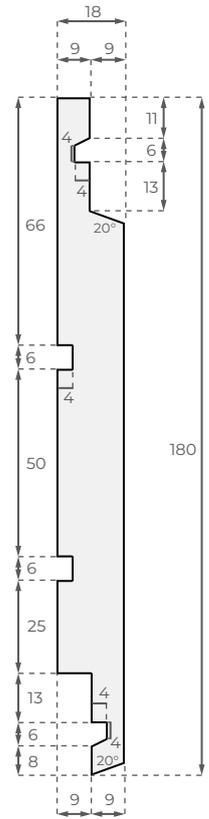

Shiplap 180x18
Dressed Face



Band Sawn Face



Dressed Face

Weatherboard Conversion Chart

Profile	Nominal/ Ex Size (mm)	Finished Size (mm)	Effective Cover (mm)	L/M per m ²
Vertical Shiplap	150x25	135x18	110	9.09
	200x25	180x18	155	6.45

KEEP WEATHERBOARDS & FASCIA FLAT, DRY AND PROTECTED



PROTECT



PREPARE



INSTALL



PAINT

Protect, prepare, install & paint weatherboards
as per the Instructions sticker on every length

BUILDING CODE

The SPP Vertical Shiplap Weatherboard System, if designed and installed as per this literature, will meet the following provisions of the New Zealand Building Code (NZBC):

- Clause B1 Structure: Performance B1.3.1, B1.3.2, B1.3.4 (a), (b), (c), (d) and (e) for the relevant physical conditions of B1.3.3 (a), (e), (f), (h), (j), and (q)
- Clause B2 Durability: Performance B2.3.1(b) and B2.3.2(b)
- Clause E2 External Moisture: Performance E2.3.2, E2.3.3, E2.3.5, E2.3.7(b) and (c)
- Clause F2 Hazardous Building Materials: Performance F2.3.1

SCOPE & LIMITATIONS OF USE

The SPP Vertical Shiplap Weatherboard System must be installed by a suitably qualified and experienced trade person. Where Restricted Building Work (RBW) applies, the installer shall be a Licensed Building Practitioner (LBP) or supervised by an LBP. It is the specifier's responsibility to ensure that the details in this specification are appropriate for the intended application and that additional detailing is obtained for a specific design or any areas that fall outside the scope of the SPP E2/AS1 Acceptable solution.

HEALTH & SAFETY

This product should be handled in accordance with safe work practices.

As with all wood and timber products, exposure to dust from this product may cause irritation to the eyes, respiratory system and skin via inhalation or skin contact.

Work areas should be kept clean. Sawing, sanding, and routing equipment should be fitted with dust extractors so that dust levels are kept within standards laid down by WorkSafe New Zealand. Wearing a dust mask conforming to AS/NZS 1715 and AS/NZS 1716 and eye protection conforming to AS/NZS 1337 is highly recommended. Repeated inhalation of wood dust over many years may increase the risk of cancer.

When handling SPP products or using tools use appropriate PPE including, but not limited to, eye, ear and breathing protection for yourself and others who could be affected. Offcuts and sawdust of treated and/or coated timber are to be disposed of in accordance with local council requirements. Follow other manufacturer's advice on the use, handling and disposal of other products such as coatings and adhesives.

TYPICAL FIXING DETAIL


Shiplap Weatherboard Bandsawn Face

Weatherboards to be single fixed, 10mm from side lap (40mm from edge of board), with a minimum 30mm penetration into framing timber as per E2/AS1 Table 24.

Vertical Shiplap Weatherboard
WBSBS 135x18 / WBSBS 180x18

Band Sawn Face Fixing Options

Nail Stainless Steel T316 Rose Head with Annular Grooved 75 x 3.15mm (or equivalent annular grooved RH nail). The head of the fixing must sit flush with the face of the board.

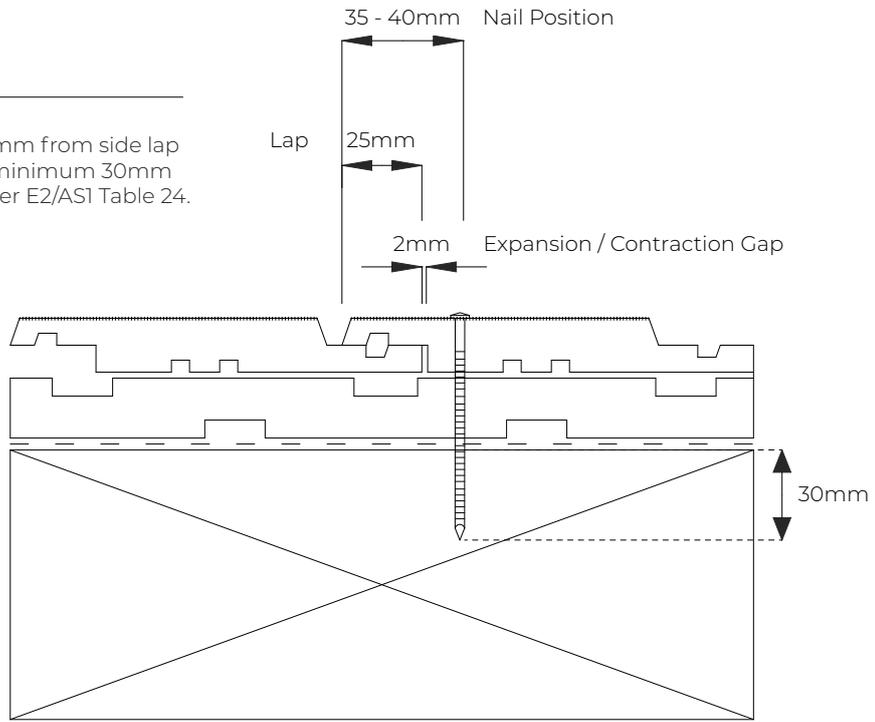

Shiplap Weatherboard Dressed Face


Weatherboards to be single fixed, 10mm from side lap (40mm from edge of board), with a minimum 35mm penetration into framing timber as per E2/AS1 Table 24.

Vertical Shiplap Weatherboard
WBS 135x18 / WBS 180x18

Dressed Face Fixing Options

Jolt Head Nail (Hand Driven)
- 65 x 3.15mm for direct fix
- 75 x 3.15mm on cavity fix

ECKO T-REX17 Weatherboard
Jolt Screw
- 8G x 65mm for direct fix
- 8G x 75mm on cavity fix
(or equivalent jolt head screw)

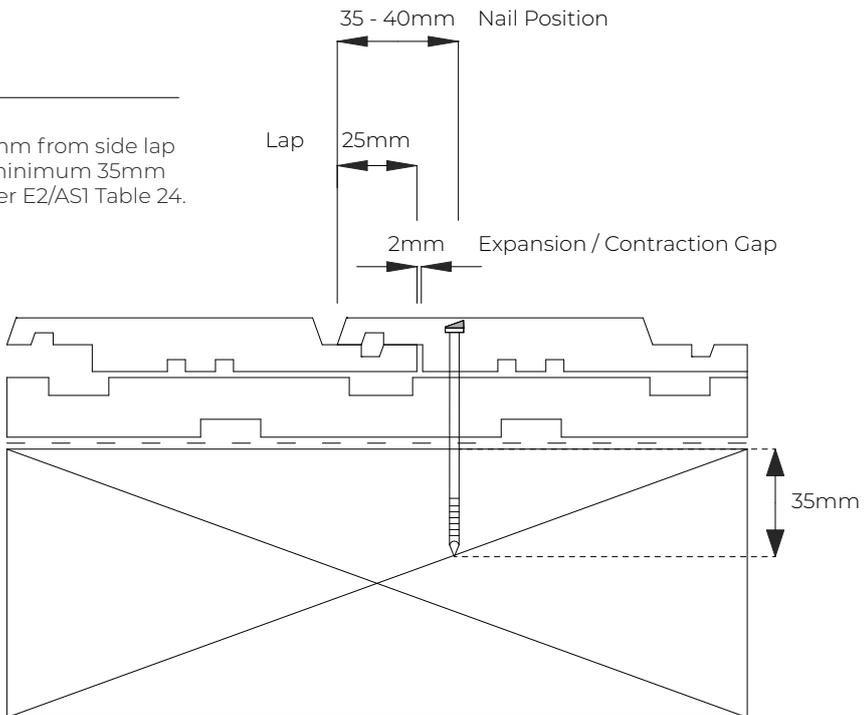

SPP MANAHAU is a range of H3.1 treated, solid or FJ timber products which are supplied in either pre-primed and un-primed states. Timber products treated to H3.1 may be used in external applications and in accordance with NZ 3602:2003 sections 110 and 111.

Pre-primed MANAHAU weatherboard have factory applied alkyd oil-based primer. To ensure the best protection ensure that at least one additional alkyd primer/undercoat is applied on site followed by at least two quality acrylic finishing coatings to complete weather proofing.

1. GRADE AND FINISH

- SPP MANAHAU solid weatherboards are available in Premium Clear 2 and better or finger jointed.
- Sourced from a pruned log, clear on three faces as per No.1 Clears, but the reverse face is allowed some natural defects (small knot, resin pocket, or other tight defect).
- Profiles are available in both dressed finish and bandsawn finish.
- The bandsawn finish is available only as painted, not raw.

2. HANDLING

SPP weatherboards and other products should be unloaded by hand, or with a Hiab forklift. Do not tip these products from a truck. Avoid scratching the face of the board, and always carry individual boards with their long sections upright to avoid excessive bending.

3. STORAGE

SPP weatherboards must remain dry at all times prior to installation. Product should be stored indoors on a flat surface, with gluts at 1m centres and at least 150mm off the ground.

Avoid direct sunlight and protect from both rain and ground moisture uptake. If storing outside use a secondary waterproof cover and groundsheet whilst allowing for good air circulation.

4. ACCLIMATISATION

At the time of installation, the cladding moisture content must be near the average moisture content which can be expected at site (typically 10% – 16% depending on the location and the time of year). Please allow approximately 3-5 days for the cladding to acclimatise before installation.

5. DIMENSIONAL CHANGE

Timber is hygroscopic (absorbs moisture from the atmosphere) and will take up and release

moisture until it reaches the equilibrium moisture content (EMC) with the surrounding environment. During this process, which is ongoing, the timber expands and contracts and thus some dimensional change will occur. This will be minimised by the application of a quality paint system.

6. WEATHERBOARD MOVEMENT

Timber weatherboards are designed to accommodate moisture, thermal and seismic movement in the board laps. **DO NOT USE ANY SEALANTS OR GLUES** between the boards or board laps, as this may inhibit the natural expansion and contraction of the cladding.

7. PAINT AND COATINGS (PRIOR TO INSTALL)

To avoid laplines which may occur, pre-paint the overlap of the profiles in the same colour as the intended topcoat finish.

Seal all cut ends with two coats of oil-based exterior primer.

8. WEATHERBOARD INSTALLATION

Weatherboard must be installed as per the current building code and BRANZ recommended good building practices.

Single fix all weatherboard profiles. Refer to E2/AS1 Table 24 for limitations. (Please note: This is profile specific refer to SPP technical drawings for nail position.)

Ensure weatherboards, once installed, are at least 150mm from the ground and 100mm from decks and terraces as per the NZ Building Code.

SPP recommend the use of 304/316 Stainless Steel for all MANAHAU cladding to extend life.

NZ Building Code Standard 3602 105.4 states “Preservative treated timber may affect the durability of metal fixings and components... To satisfy the durability provisions of Clause B2 of the NZBC and those acceptable solutions set out in NZS 3604 the correct protective system or grade of stainless steel shall be used.” Further, C105.4 states “Timber treatments may affect the life of fasteners... Hot dipped galvanized nails, wire dogs, bolts and sheet fixings in contact with copper chrome arsenate (CCA) treated timber in damp conditions can have an expected life of less than 15 years.”

Punch nails/screws, putty over and spot prime immediately to avoid moisture penetration.

9. RESIN BLEED

Resin Bleed is when resin comes to the surface of a painted weatherboard. Whilst unsightly the occurrence of resin bleed does not affect the durability or long-term performance of the weatherboard. The choice of a light top colour and a correctly applied quality paint system will help to minimise this occurrence.

SPP makes every effort to source non-resinous lumber and identify resin pockets during the manufacturing process, however we do not warrant against this natural feature.

10. COLOUR CHOICE

Dark colours absorb heat from the sun and may cause excessive movement, distortion and possibly resin bleed. Light colours reflect the sun's heat. Therefore, only light colours with a light reflectance value (LRV) of greater than or equal to 45% may be used. Refer paint colour charts for details.

11. FINISHING AND PAINTING

- Painting should take place as soon as possible after installation. If boards have been exposed for longer than 4 weeks, some sanding and re-priming may be required.
- Check the moisture content of the boards before painting. Equilibrium Moisture Content (EMC) should be at 16% or less. Use a correctly calibrated moisture meter to check.
- Once installed, remove all loose material such as dirt from the surface. Spot prime any exposed timber with two coats of oil-based exterior primer. Spot prime the filled nail holes.
- Once prepared, apply a minimum of one coat of oil-based primer/under coat followed by two full coats of 100% premium acrylic low gloss house paint to the manufacturer's specification, at a rate of 12-14m²/L.
- Once applied, the two topcoats should have a combined thickness of no less than 50 microns.
- The onus is on the painter to ensure that the primed surface remains well adhered to the timber substrate and is a suitable base for the subsequent topcoats. This is particularly important where the boards have been exposed for longer than 4 weeks before top coating.
- Refer to the AS/NZ 2311 guide to painting buildings.

It is the responsibility of the homeowner to ensure that annual maintenance is carried out. In some cases, this may be required more regularly e.g. sea spray.

12. MAINTENANCE AND CARE OF PAINTED TIMBER PRODUCTS

Wash all exterior surfaces using a low pressure wash system to remove dust, dirt and other contaminants.

Do not use a high pressure washing system. If the washing does not remove stubborn areas of mould or dirt, use a soft brush or broom and an appropriate cleaning agent to remove these deposits. Check with the paint manufacturer and read the directions on the product to apply the cleaning agent.

Once the building is clean and the surfaces have been inspected for damage, wear and tear and paint coating degrade then repairs must be undertaken immediately.

If the paint surface has been damaged, then:

- Remove all damaged paint, sand back if required
- Apply primer on any bare timber
- Once the primer has dried apply two top coats of a quality top coat paint

Timber weatherboard homes should be repainted every 5-7 years as per paint manufacturer's specifications. Repainting may be required earlier depending on condition and exposure to harsher elements.

ARCHITECTURAL DRAWINGS GENERAL NOTES

This document has been specifically designed to help Architects, Designers and Builders.

A4 SITE DRAWINGS

The details in this section are full scale 1:2 at A4. You can easily read these drawings and are intended for the builder.

ARCHITECTS AND DESIGNERS RESPONSIBILITY

We have made the drawings as accurate as possible. We have specified extra flashing's in some areas that are over and above the NZ Building Code E2/AS1 External Moisture. But it is the Architects/Designers responsibility to confirm the suitability of these details for his particular projects and his client. The Architect/Designer will need to determine the "RISK MATRIX" that is project-specific, which then determines the details required. Builders that have questions about these details, will need to contact their project-specific Architect or Designer.

Legal Information

Southern Pine Products Ltd and its Agent AIPdesignNZ Ltd have no reason to believe the information in the details are inaccurate. Southern Pine Products Ltd and its Agent AiPdesignNZ Ltd does not warrant the accuracy, adequacy or completeness of such information and we do not undertake the information in the details updated.

Southern Pine Products Ltd and its Agent AIPdesignNZ Ltd Does not:

- a) Give any assurances that the details and information will be suitable for your purposes and you agree that you will not rely on the information and you will make your own independent assessments (with the aid of qualified independent advice)
- b) Accept responsibility for any loss, damage (including indirect, special or consequential loss or damage), however caused (including through negligence) that you may directly or indirectly suffer in connection with your use of or reliance on the Southern Pine Products Ltd details, including the accuracy or currency of the Southern Pine Products Ltd and AIPdesign NZ Ltd details. Any condition, warranty right or liability which would otherwise be implied excluded.

Technical Information

- a) The AutoCAD drawings have all the Xref,s embedded as blocks.
Erase the title block and Xref in your title block.
- b) These drawings have been KEY NOTED
This makes the details more readable, people then focus on the actual important notes on the drawing. This also allows for easier revisions. You only need to change one keynote reference. You will need to personalise these notes to make them specific to your project.
- c) The Drawings are coloured and have pen assignments to the colours, a PGP file will be supplied in the Zip file. All the drawing output sheets are default set to print a PDF drawing. It is recommended that you print these detail in PDF then print your paper copies from the PDF file.

- d) The AutoCAD drawings are made up of multiple details. The A1/A3 drawings also link into the A4 details drawings. These A4 drawings have special scaled down notes and blocks. (annotative Scale) But it is the exact same information.
- e) These drawings are Copyrighted to “Southern Pine Products Limited” (All Rights Asserted) and their Approved Clients. The Drawings have two methods of electronic protection. You will receive your own personal password to open the drawings.

Disclaimer

This information is supplied in good faith, and we recommend the installer and painters familiarise themselves with all relevant building and painting codes. Builders using weatherboards should purchase the BRANZ Good Practice Guide for Timber Cladding, a comprehensive detailing and installation guide.


Southern Pine Products will not be liable for any losses incurred resulting from the failure to adhere to good building and painting practices. Although every effort has been made to ensure the information in this data sheet compiles with existing building standards and recognised codes of practice, no responsibility is accepted for any errors and omissions nor for any specifications or work based on this information.

A3/A1 ARCHITECTURAL DETAILS - INDEX

<u>Page</u>	<u>Sheet Number</u>	<u>Sheet Title</u>
13	SPP CF20 VS10	WINDOW HEAD DETAIL
14	SPP CF20 VS11	WINDOW SILL DETAILS
15	SPP CF20 VS12	WINDOW JAMB DETAIL
16	SPP CF20 VS13	WINDOW FLASHING DETAILS
17	SPP CF20 VS20	DOOR HEAD DETAIL
18	SPP CF20 VS21	DOOR SILL DETAIL
19	SPP CF20 VS22	DOOR JAMB DETAIL
20	SPP CF20 VS23	DOOR FLASHING DETAILS
21	SPP CF20 VS30	METER BOX HEAD DETAIL
22	SPP CF20 VS31	METER BOX SILL DETAIL
23	SPP CF20 VS32	METER BOX JAMB DETAIL
24	SPP CF20 VS33	METER BOX FLASHING DETAILS
25	SPP CF20 VS40	EXTERNAL CORNER
26	SPP CF20 VS41	3D EXTERNAL CORNER
27	SPP CF20 VS42	INTERNAL CORNER
28	SPP CF20 VS43	3D INTERNAL CORNER
29	SPP CF20 VS44	WEATHERBOARD FIXING
30	SPP CF20 VS45	DRAINED INTER-STOREY JOINT
31	SPP CF20 VS50	EXTERNAL BOXED CORNER
32	SPP CF20 VS51	3D EXTERNAL BOXED CORNER
33	SPP CF20 VS52	INTERNAL BOXED CORNER
34	SPP CF20 VS53	3D INTERNAL BOXED CORNER
35	SPP CF20 VS54	PIPE PENETRATION
36	SPP CF20 VS55	3D PIPE PENETRATION
37	SPP CF20 VS60	BASE OF WALL - TIMBER
38	SPP CF20 VS61	BASE OF WALL - CONCRETE


Page	Sheet Number	Sheet Title
39	SPP CF20 VS62	SOFFIT DETAIL AT WALL
40	SPP CF20 VS63	SOFFIT DETAIL AT FASCIA
41	SPP CF20 VS64	APRON FLASHING - ROOF TO WALL JUNCTION
42	SPP CF20 VS65	BALUSTRADE CAPPING OR PARAPET DETAIL
43	SPP CF20 VS70	BASE OF WALL, MEMBRANE ROOF
44	SPP CF20 VS71	DECK TO ROOF MEMBRANE - SADDLE FLASHING - ONE
45	SPP CF20 VS72	DECK TO ROOF MEMBRANE - SADDLE FLASHING - TWO
46	SPP CF20 VS73	DECK TO ROOF MEMBRANE - SADDLE FLASHING - THREE
47	SPP CF20 VS74	TYPICAL PARAPET CAPPING JOINT DETAILS
48	SPP CF20 VS75	PARAPET SECTION TO MEMBRANE ROOF
49	SPP CF20 VS90	HALF WALL - SILL WEATHERBOARD TO BRICK
50	SPP CF20 VS91	CANTILEVER FLOOR - BRICK TO WEATHERBOARD
51	SPP CF20 VS92	IN-LINE JUNCTION - WEATHERBOARD TO BRICK
52	SPP CF20 VS93	INTERNAL CORNER - WEATHERBOARD TO BRICK
53	SPP CF20 VS94	EXTERIOR JUNCTION - WEATHERBOARD TO BRICK
54	SPP CF20 VS95	FLASHINGS - WEATHERBOARD TO BRICK
55	SPP CF20 VS100	HALF WALL - SILL - PLASTER PANEL TO WEATHERBOARD
56	SPP CF20 VS101	CANTILEVER FLOOR - PLASTER PANEL TO WEATHERBOARD
57	SPP CF20 VS102	IN-LINE JUNCTION - PLASTER PANEL TO WEATHERBOARD
58	SPP CF20 VS103	INTERNAL CORNER - PLASTER PANEL TO WEATHERBOARD
59	SPP CF20 VS104	EXTERIOR JUNCTION - PLASTER PANEL TO WEATHERBOARD
60	SPP CF20 VS105	FLASHINGS - PLASTER PANEL TO WEATHERBOARD

WINDOW HEAD DETAIL

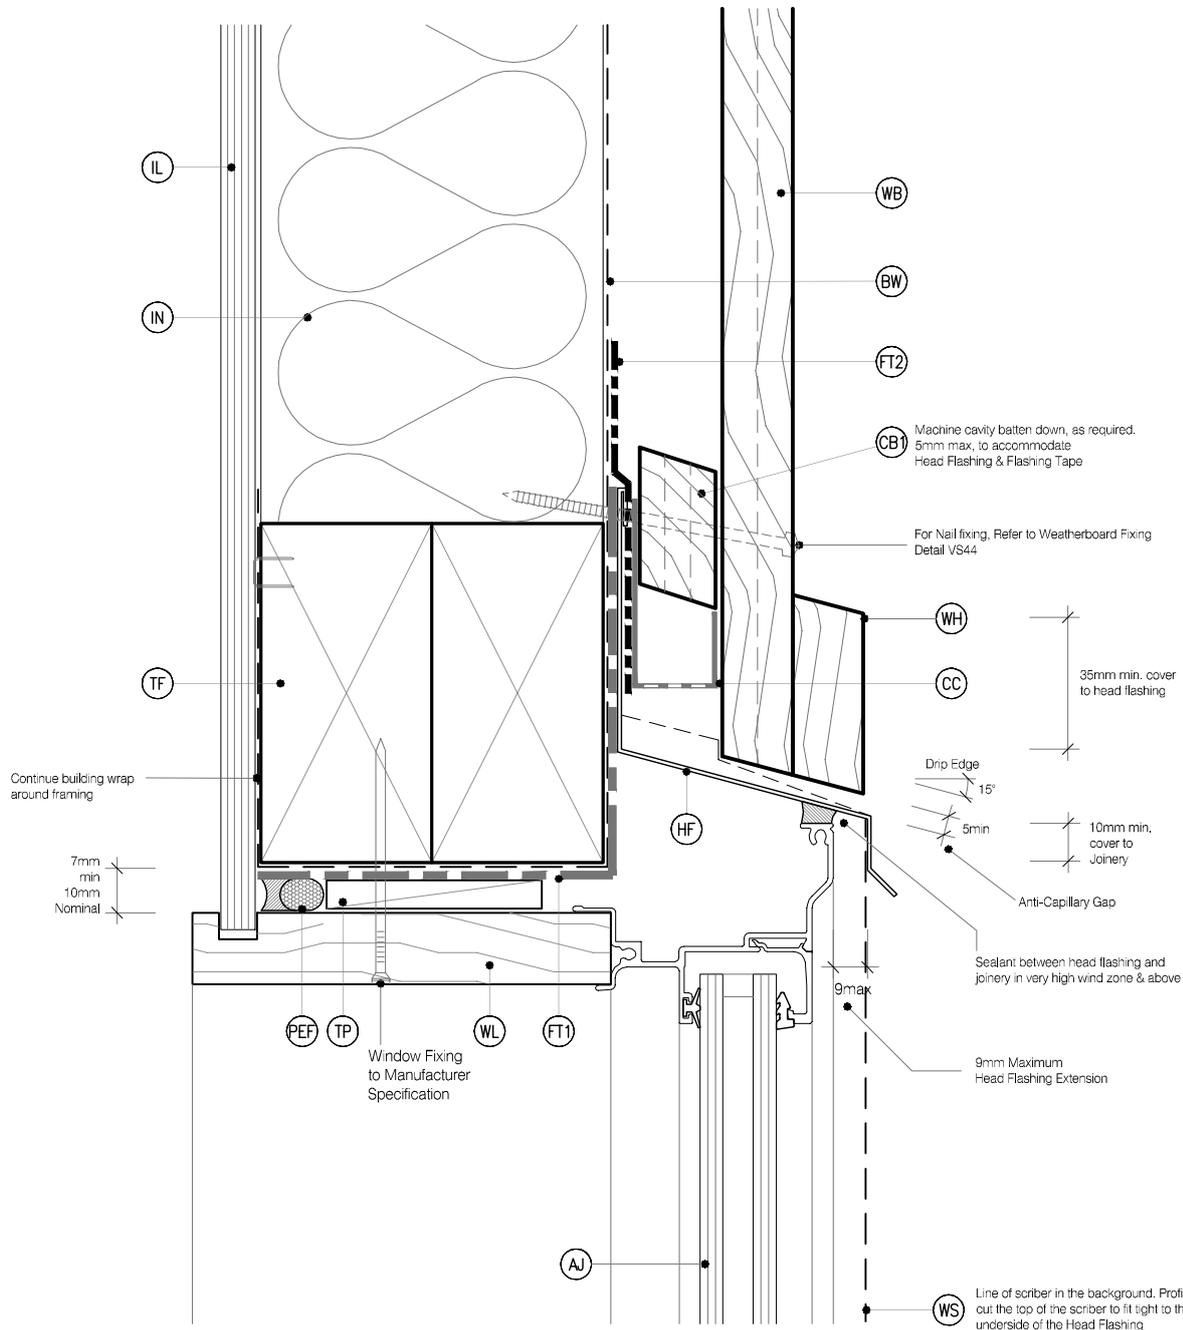

LEGEND:


- | | | | | | |
|-------|--|-------|--|------|--|
| (AJ) | ALUMINIUM JOINERY: Selected double glazed aluminium joinery. To E2/AS1 9.1.10 | (CC) | CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding | (TF) | TIMBER FRAME: H1.2 min treated timber framing |
| (BW) | BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1) | (FT1) | FLASHING TAPE: Flashing tape over wrap 70mm (50 min) turn-down required in corners only. Refer to Fig. 72 of NZBC E2/AS1 | (TP) | TIMBER PACKER: Tan H3.2 Treated Packer |
| (CB1) | CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL: 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity | (FT2) | FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped over aluminium head flashing or 2nd layer of Building Wrap, taped joint to top of timber frame | (WB) | WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617 |
| (CB2) | CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2 | (HF) | HEAD FLASHING: Aluminium head flashing with minimum 15 degree fall, optional hemmed edges as per table 7 E2/AS1 | (WL) | WINDOW LINER: As Specified |
| (CB3) | CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED: 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity | (IL) | INTERNAL LINING: Selected Internal Lining | (WH) | WEATHERHEAD: (OPTIONAL) Southern Pine, Horizontal batten above window as necessary to suit profile, shaped to shed water, sealant to back of head scribe |
| | | (IN) | INSULATION: Selected Insulation | (WS) | WINDOW SCRIBER: Southern Pine SDA18 x 18, sealant to back of SDA and 75 x 3.15mm 316 Stainless Steel nail in 3mm predrilled hole. |
| | | (PEF) | PEF ROD BACKING: Foam backing rod with sealant to cavity in Window perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio) | (WZ) | WANZ SUPPORT: Provide window support as required by joinery manufacturer |

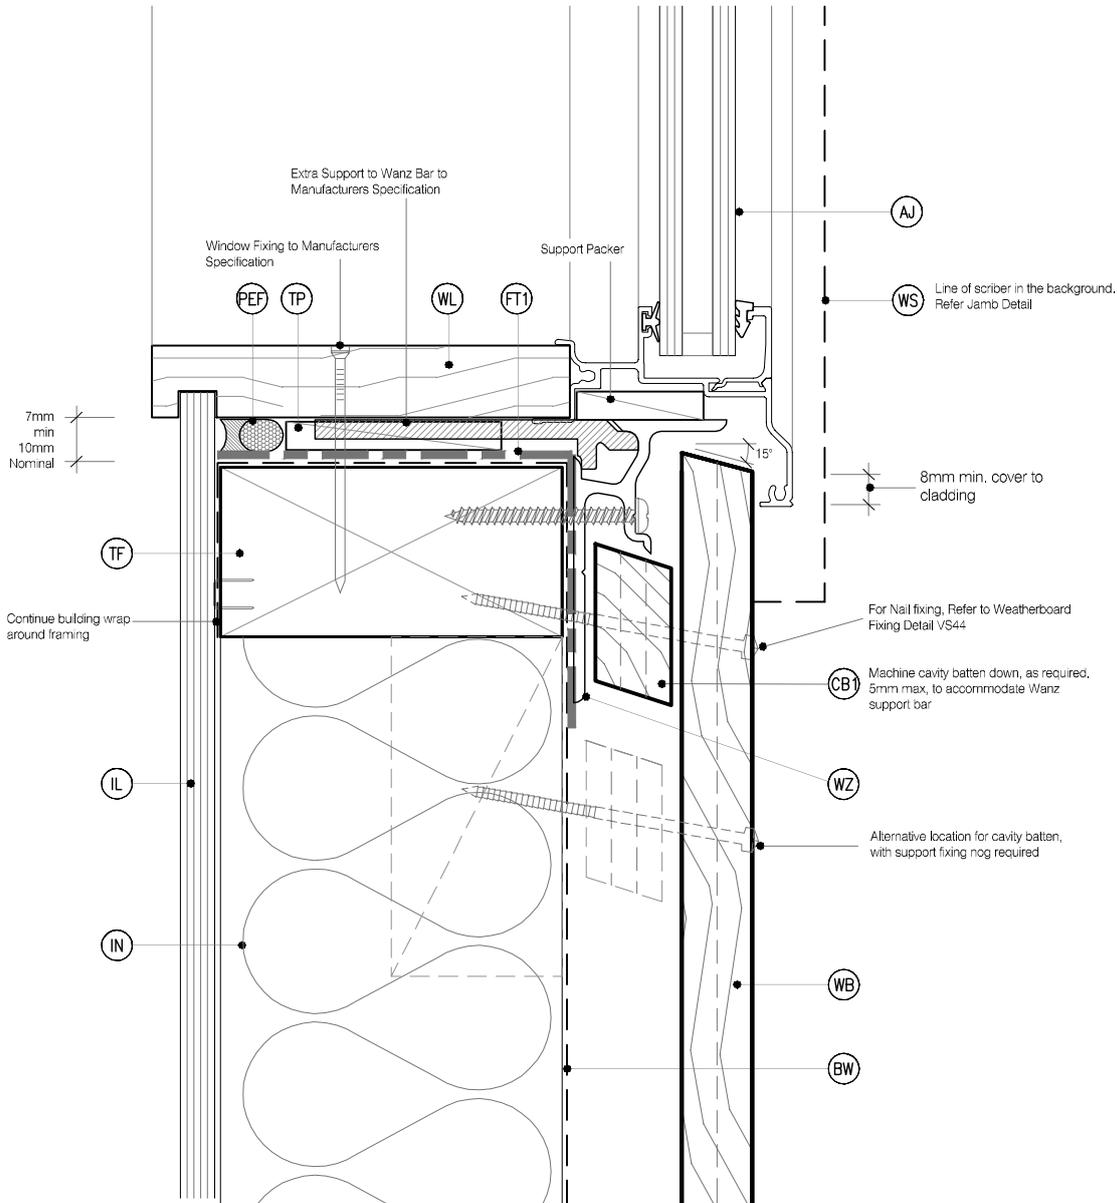

LEGEND:

- | | | |
|---|--|---|
| <p>(AJ) ALUMINIUM JOINERY: Selected double glazed aluminium joinery. To E2/AS1 9.1.10</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> | <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(FT1) FLASHING TAPE: Flashing tape over wrap 70mm (50 min) turn-down required in corners only. Refer to Fig. 72 of NZBC E2/AS1</p> <p>(FT2) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped over aluminium head flashing or 2nd layer of Building Wrap, taped joint to top of timber frame</p> <p>(HF) HEAD FLASHING: Aluminium head flashing with minimum 15 degree fall, optional hemmed edges as per table 7 E2/AS1</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(PEF) PEF ROD BACKING: Foam backing rod with sealant to cavity in Window perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio)</p> | <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(TP) TIMBER PACKER: Tan H3.2 Treated Packer</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> <p>(WL) WINDOW LINER: As Specified</p> <p>(WH) WEATHERHEAD: (OPTIONAL) Southern Pine, Horizontal batten above window as necessary to suit profile, shaped to shed water, sealant to back of head scriber</p> <p>(WS) WINDOW SCRIBER: Southern Pine SDA18 x 18, sealant to back of SDA and 75 x 3.15mm 316 Stainless Steel nail in 3mm predrilled hole.</p> <p>(WZ) WANZ SUPPORT: Provide window support as required by joinery manufacturer</p> |
|---|--|---|


WINDOW JAMB DETAIL

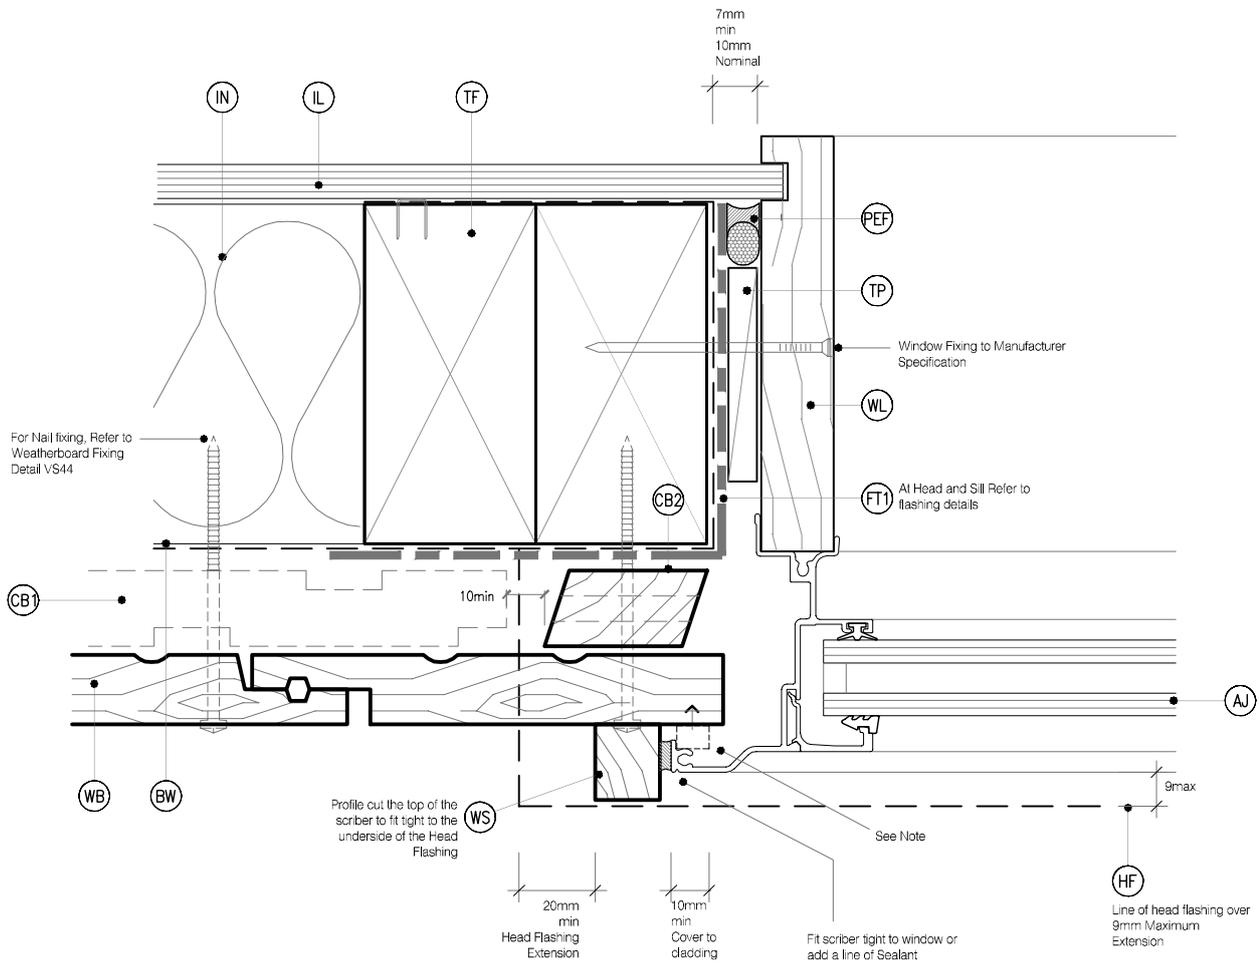


NOTE : No Scriber Option :
The Aluminium Joinery must sit hard against the back of the joinery flange and the timber weatherboards with a E.P.S Compressible bond breaker foam seal between

LEGEND :

- | | | |
|---|--|---|
| <p>(AJ) ALUMINIUM JOINERY: Selected double glazed aluminium joinery. To E2/AS1 9.1.10</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> | <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(FT1) FLASHING TAPE: Flashing tape over wrap 70mm (50 min) turn-down required in corners only. Refer to Fig. 72 of NZBC E2/AS1</p> <p>(FT2) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped over aluminium head flashing or 2nd layer of Building Wrap, taped joint to top of timber frame</p> <p>(HF) HEAD FLASHING: Aluminium head flashing with minimum 15 degree fall, optional hemmed edges as per table 7 E2/AS1</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(PEF) PEF ROD BACKING: Foam backing rod with sealant to cavity in Window perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio)</p> | <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(TP) TIMBER PACKER: Tan H3.2 Treated Packer</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> <p>(WL) WINDOW LINER: As Specified</p> <p>(WH) WEATHERHEAD: (OPTIONAL) Southern Pine, Horizontal batten above window as necessary to suit profile, shaped to shed water, sealant to back of head scriber</p> <p>(WS) WINDOW SCRIBER: Southern Pine SDA18 x 18, sealant to back of SDA and 75 x 3.15mm 316 Stainless Steel nail in 3mm predrilled hole.</p> <p>(WZ) WANZ SUPPORT: Provide window support as required by joinery manufacturer</p> |
|---|--|---|

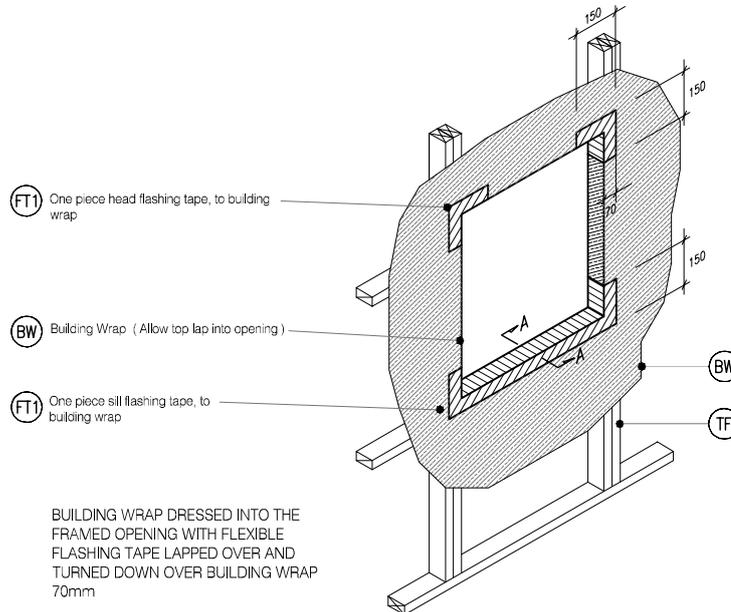

W4 TYPICAL WINDOW OPENING (FLASHING TAPE)
 VS13 SCALE : N.T.S

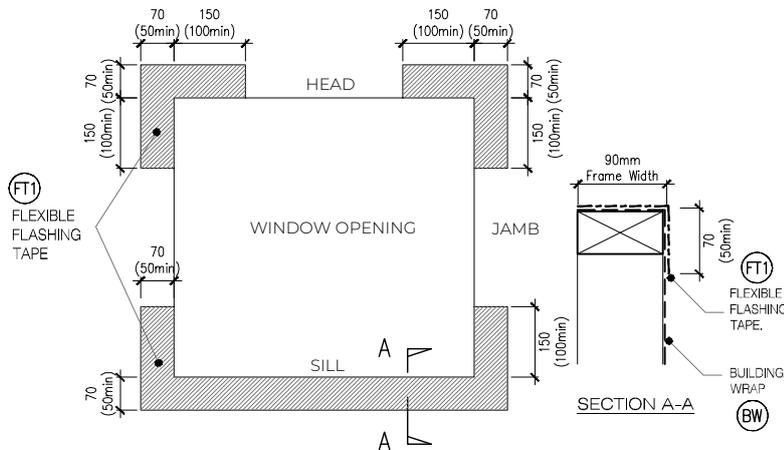

- DENDRO® is Southern Pine's premium product range of H3.2 treated, solid, clear weatherboards. Manufactured from, high quality, pruned NZ Radiata Pine. Product warranty, 25 years if used in accordance with the Installation & Maintenance Guide.
- All Southern Pine Weatherboard profiles have been machined to be compliant with NZS 3617 and BRANZ BU411
- The Southern Pine Weatherboard System, if designed and installed as per the Installation & Maintenance Guide, will meet

the following provisions of the New Zealand


Building Code (NZBC):

- Clause B1 Structure: Performance B1.3.1, B1.3.2, B1.3.4 (a), (b), (c), (d) and (e) for the
- Clause B2 Durability: Performance B2.3.1(b) and B2.3.2(b)
- Clause E2 External Moisture: Performance E2.3.2, E2.3.3, E2.3.5, E2.3.7(b) and (c)
- Clause F2 Hazardous Building Materials: Performance F2.3.1

- This Weatherboard System must be installed by a qualified trade person. Restricted Building Work (RBW) requires a Licensed Building Practitioner (LBP) or supervised by an LBP. It is the specifier's responsibility to ensure that the details are appropriate for the intended application and that additional detailing is obtained for a specific design or any areas that fall outside the scope of the Southern Pine Products & E2/AS1 Acceptable solution.

W5 FLEXIBLE BUILDING WRAP AT OPENING


VS13 SCALE : 1 / 5 @ A1, 1 / 10 @ A3

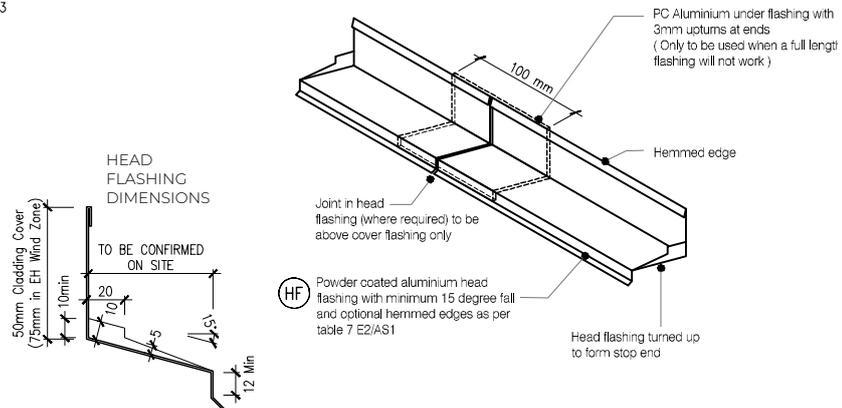

ONE PIECE PC ALUMINIUM HEAD FLASHING 15° SLOPE WITH 10mm min COVER TO JOINERY EXTEND 30mm min EITHER SIDE OF JOINERY WITH STOP ENDS


W6 TYPICAL HEAD & FLASHING JOINT
 VS13 SCALE : 1 / 2 @ A1, 1 / 4 @ A3

WINDOW HEAD DETAIL

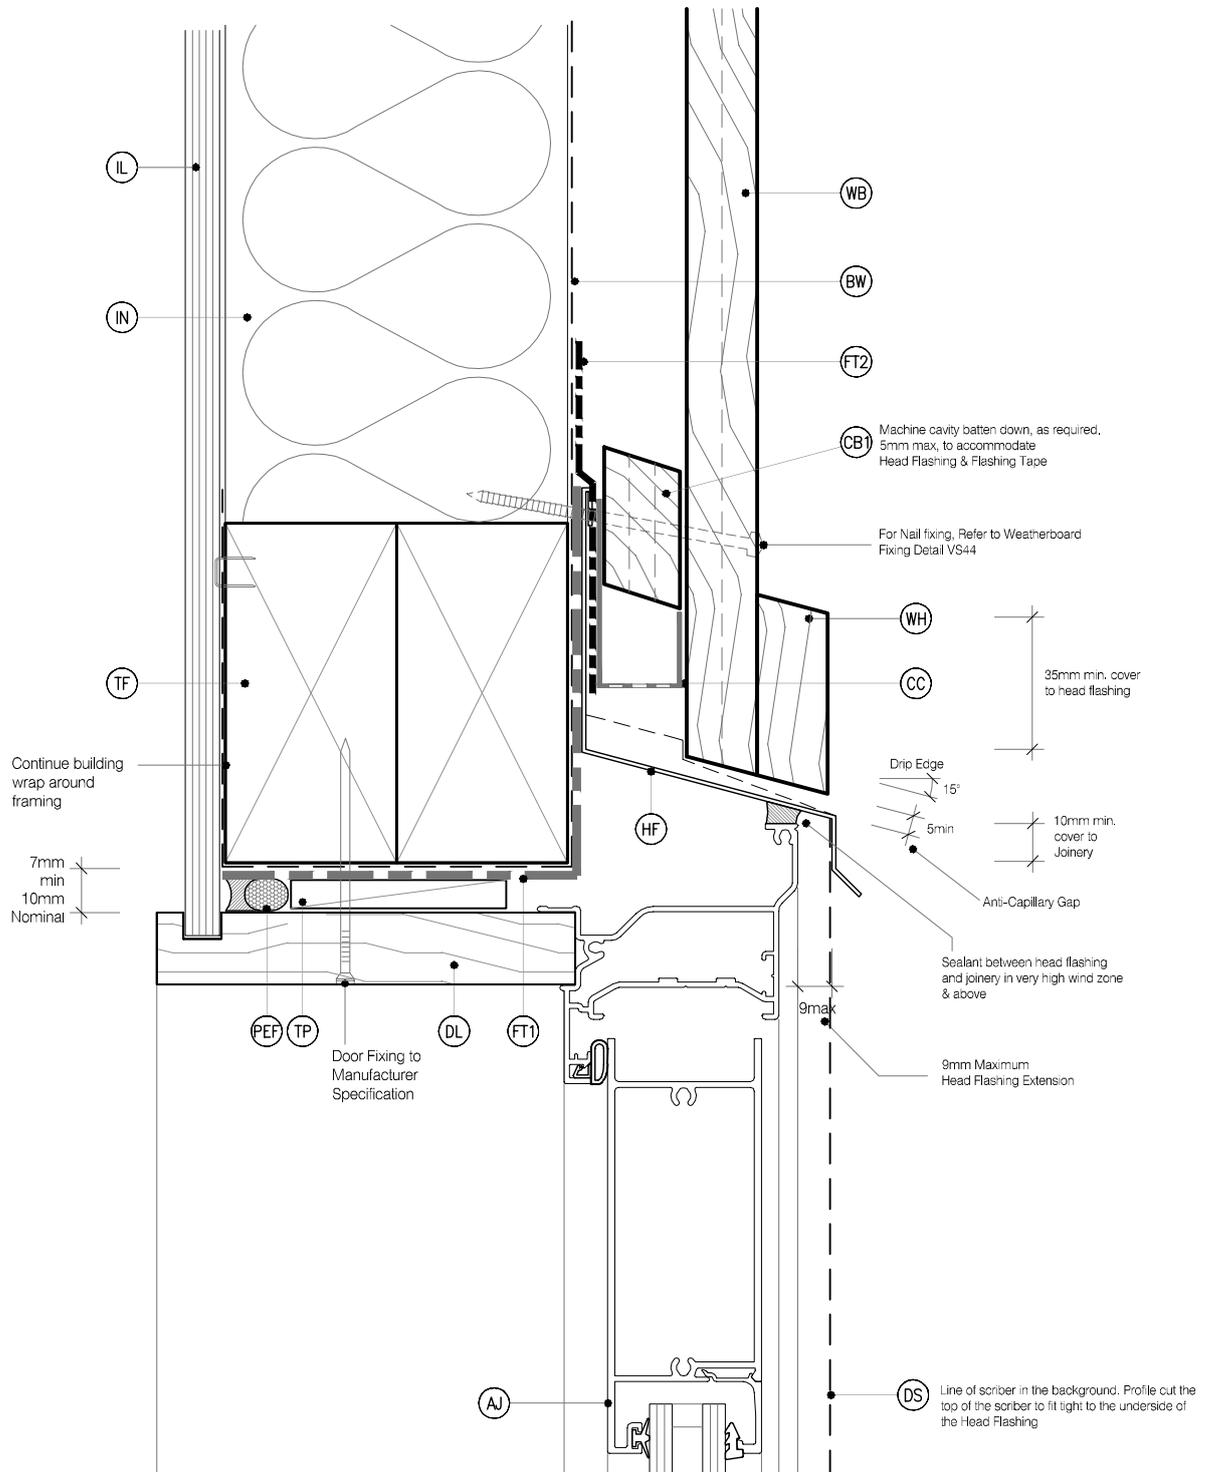

LEGEND:


- | | | |
|--|---|--|
| (AJ) ALUMINIUM JOINERY: Selected double glazed aluminium joinery. To E2/AS1 9.1.10 | (CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding | (TF) TIMBER FRAME: H1.2 min treated timber framing |
| (BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1) | (FT1) FLASHING TAPE: Flashing tape over wrap 70mm (50 min) turn-down required in corners only. Refer to Fig. 72 of NZBC E2/AS1 | (TP) TIMBER PACKER: Tan H3.2 Treated Packer |
| (CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity | (FT2) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped over aluminium head flashing or 2nd layer of Building Wrap, taped joint to top of timber frame | (WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617 |
| (CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or Castellated H3.2 | (HF) HEAD FLASHING: Aluminium head flashing with minimum 15 degree fall, optional hemmed edges as per table 7 E2/AS1 | (DL) DOOR LINER: As Specified |
| (CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity | (IL) INTERNAL LINING: Selected Internal Lining | (WH) WEATHERHEAD: (OPTIONAL) Southern Pine, Horizontal batten above window as necessary to suit profile, shaped to shed water, sealant to back of head scribe |
| | (IN) INSULATION: Selected Insulation | (DS) DOOR SCRIBER: Southern Pine SDA18 x 18, sealant to back of SDA and 75 x 3.15mm 316 Stainless Steel nail in 3mm predrilled hole. |
| | (PEF) PEF ROD BACKING: Foam backing rod with sealant to cavity in Window perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio) | (WZ) WANZ SUPPORT: Provide window support as required by joinery manufacturer |

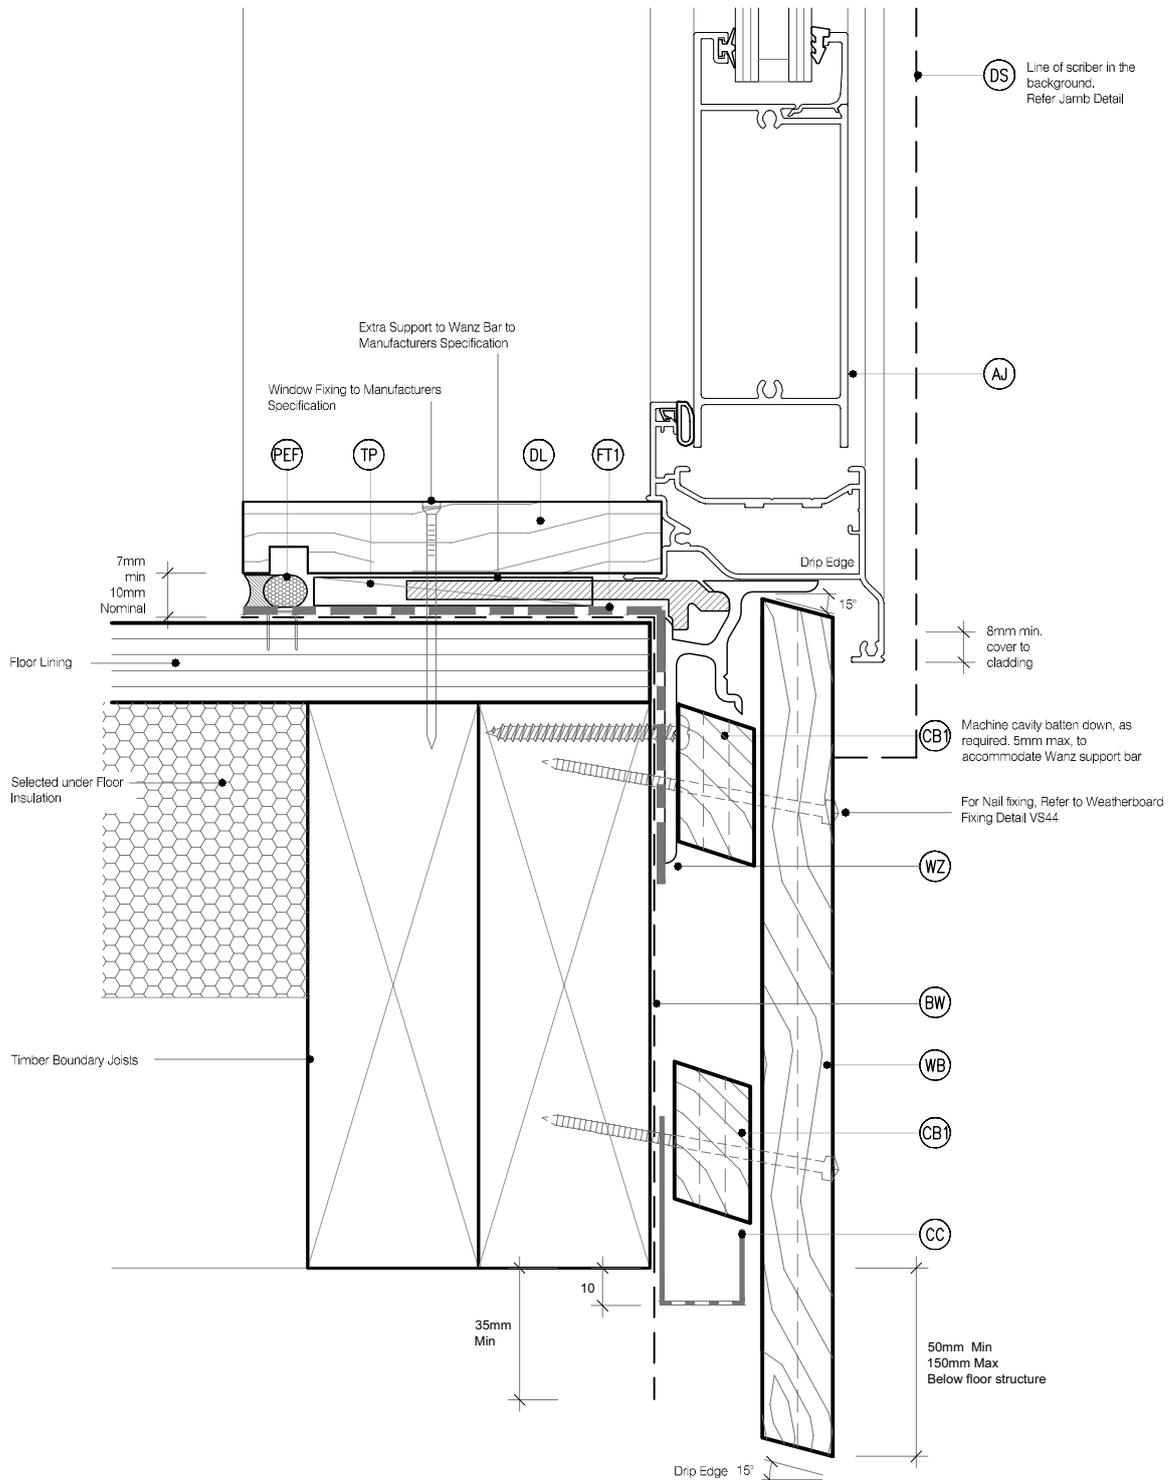

LEGEND:

- | | | |
|---|--|--|
| <p>(AJ) ALUMINIUM JOINERY: Selected double glazed aluminium joinery. To E2/AS1 9.1.10</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or Castellated H3.2</p> <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> | <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(FT1) FLASHING TAPE: Flashing tape over wrap 70mm (50 min) turn-down required in corners only. Refer to Fig. 72 of NZBC E2/AS1</p> <p>(FT2) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped over aluminium head flashing or 2nd layer of Building Wrap, taped joint to top of timber frame</p> <p>(HF) HEAD FLASHING: Aluminium head flashing with minimum 15 degree fall, optional hemmed edges as per table 7 E2/AS1</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(PEF) PEF ROD BACKING: Foam backing rod with sealant to cavity in Window perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio)</p> | <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(TP) TIMBER PACKER: Tan H3.2 Treated Packer</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> <p>(DL) DOOR LINER: As Specified</p> <p>(WH) WEATHERHEAD: (OPTIONAL) Southern Pine, Horizontal batten above window as necessary to suit profile, shaped to shed water, sealant to back of head scribe</p> <p>(DS) DOOR SCRIBER: Southern Pine SDA18 x 18, sealant to back of SDA and 75 x 3.15mm 316 Stainless Steel nail in 3mm predrilled hole.</p> <p>(WZ) WANZ SUPPORT: Provide window support as required by joinery manufacturer</p> |
|---|--|--|


DOOR JAMB DETAIL

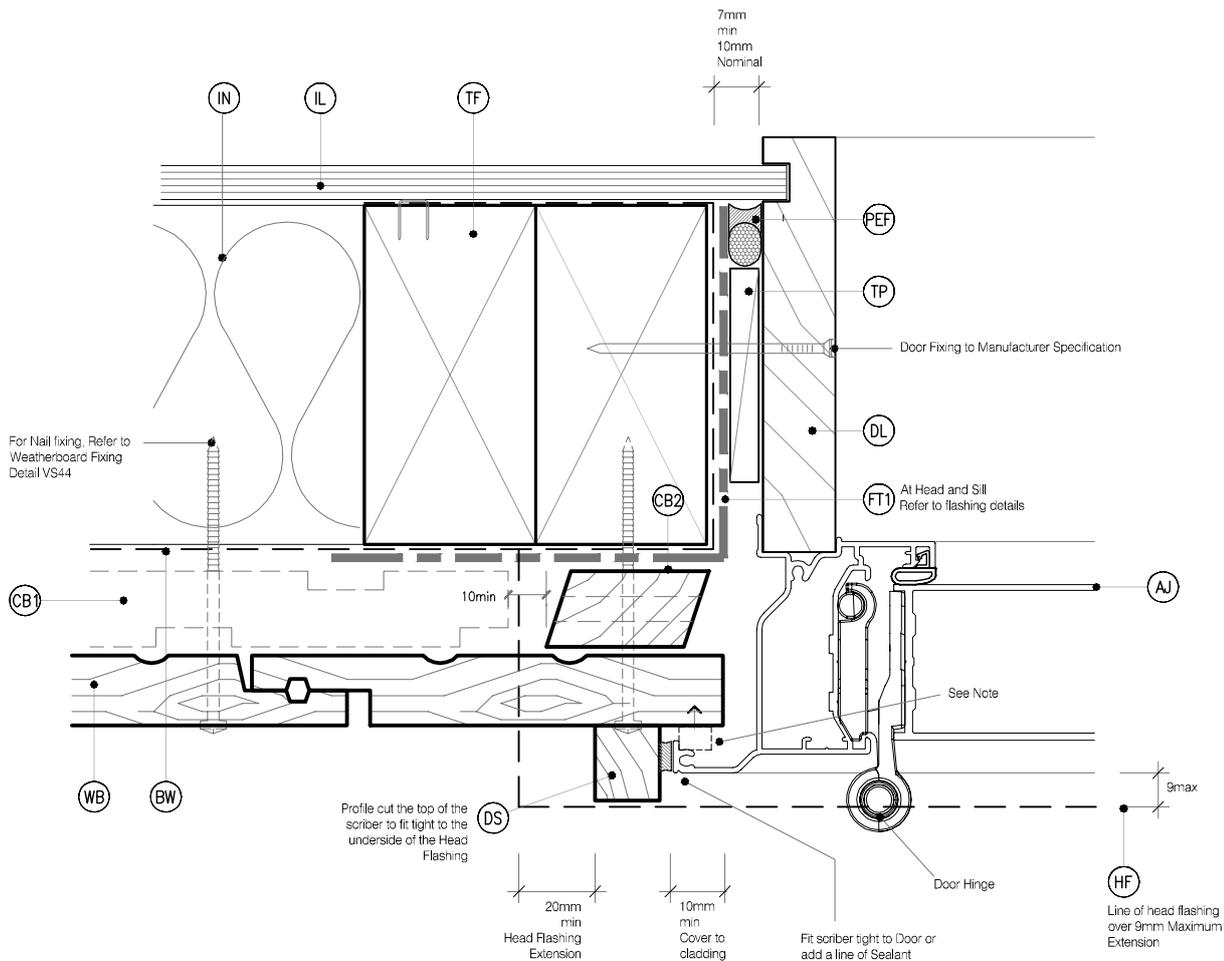


NOTE : No Scribe Option :
The Aluminium Joinery must sit hard against the back of the joinery flange and the timber weatherboards with a E.P.S Compressible bond breaker foam seal between

LEGEND :

- | | | |
|---|--|--|
| <p>(AJ) ALUMINIUM JOINERY: Selected double glazed aluminium joinery. To E2/AS1 9.1.10</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23. In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or Castellated H3.2</p> <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> | <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(FT1) FLASHING TAPE: Flashing tape over wrap 70mm (50 min) turn-down required in corners only. Refer to Fig. 72 of NZBC E2/AS1</p> <p>(FT2) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped over aluminium head flashing or 2nd layer of Building Wrap, taped joint to top of timber frame</p> <p>(HF) HEAD FLASHING: Aluminium head flashing with minimum 15 degree fall, optional hemmed edges as per table 7 E2/AS1</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(PEF) PEF ROD BACKING: Foam backing rod with sealant to cavity in Window perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio)</p> | <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(TP) TIMBER PACKER: Tan H3.2 Treated Packer</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> <p>(DL) DOOR LINER: As Specified</p> <p>(WH) WEATHERHEAD: (OPTIONAL) Southern Pine, Horizontal batten above window as necessary to suit profile, shaped to shed water, sealant to back of head scribe</p> <p>(DS) DOOR SCRIBER: Southern Pine SDA18 x 18, sealant to back of SDA and 75 x 3.15mm 316 Stainless Steel nail in 3mm predrilled hole.</p> <p>(WZ) WANZ SUPPORT: Provide window support as required by joinery manufacturer</p> |
|---|--|--|

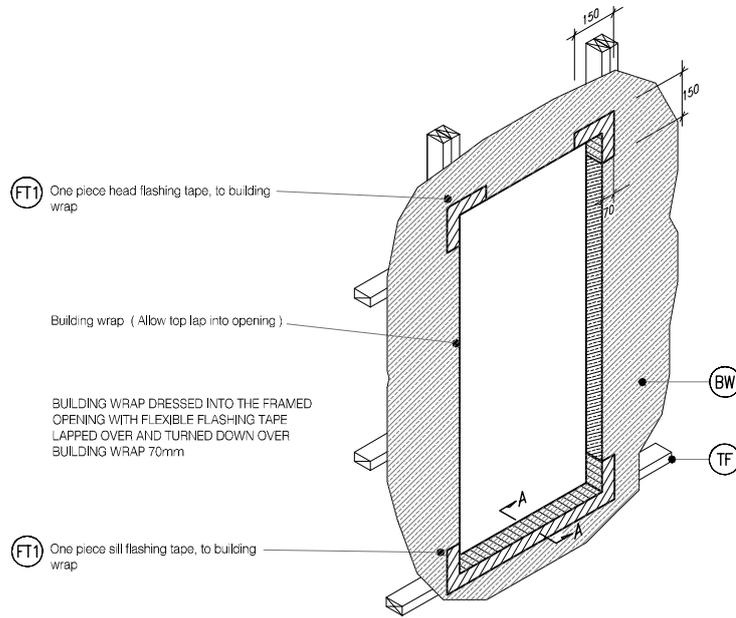

D4 TYPICAL DOOR OPENING (FLASHING TAPE)
 VS23 SCALE : N.T.S

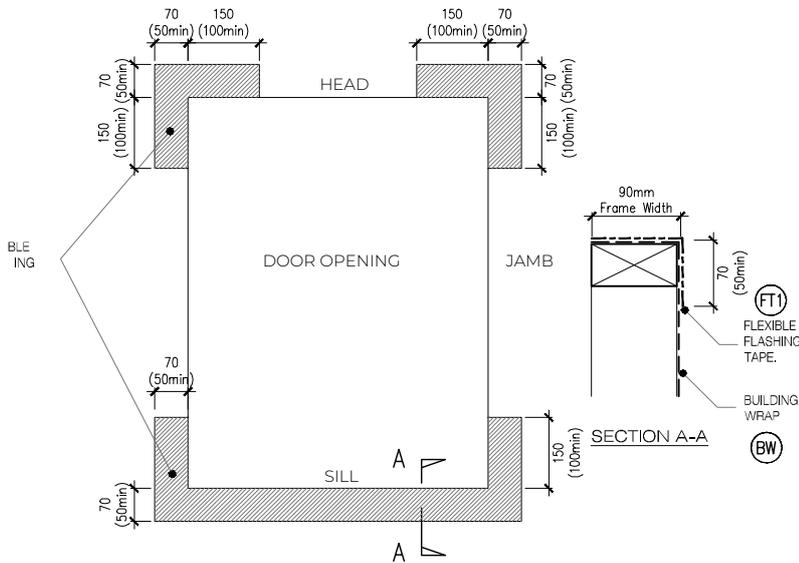


- DENDRO® is Southern Pine's premium product range of H3.2 treated, solid, clear weatherboards. Manufactured from, high quality, pruned NZ Radiala Pine. Product warranty, 25 years if used in accordance with the Installation & Maintenance Guide.
- All Southern Pine Weatherboard profiles have been machined to be compliant with NZS 3617 and BRANZ BU411
- The Southern Pine Weatherboard System, if designed and installed as per the Installation & Maintenance Guide, will meet

the following provisions of the New Zealand Building Code (NZBC):

- Clause B1 Structure: Performance B1.3.1, B1.3.2, B1.3.4 (a), (b), (c), (d) and (e) for the
- Clause B2 Durability: Performance B2.3.1(b) and B2.3.2(b)
- Clause E2 External Moisture: Performance E2.3.2, E2.3.3, E2.3.5, E2.3.7(b) and (c)
- Clause F2 Hazardous Building Materials: Performance F2.3.1

- This Weatherboard System must be installed by a qualified trade person. Restricted Building Work (RBW) requires a Licensed Building Practitioner (LBP) or supervised by an LBP. It is the specifier's responsibility to ensure that the details are appropriate for the intended application and that additional detailing is obtained for a specific design or any areas that fall outside the scope of the Southern Pine Products & E2/AS1 Acceptable solution.


D5 FLEXIBLE BUILDING WRAP AT OPENING
 VS23 SCALE : 1 / 5 @ A1, 1 / 10 @ A3

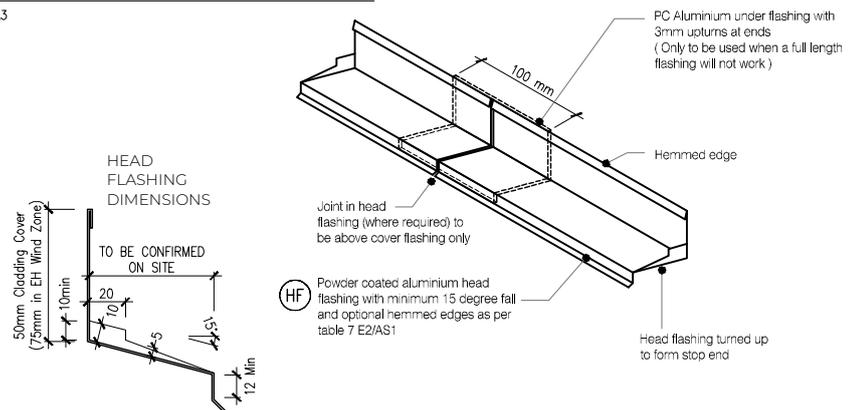

ONE PIECE PC ALUMINIUM HEAD FLASHING 15° SLOPE WITH 10mm min COVER TO JOINERY EXTEND 30mm min EITHER SIDE OF JOINERY WITH STOP ENDS


D6 TYPICAL HEAD & FLASHING JOINT
 VS23 SCALE : 1 / 2 @ A1, 1 / 4 @ A3

METER BOX HEAD DETAIL

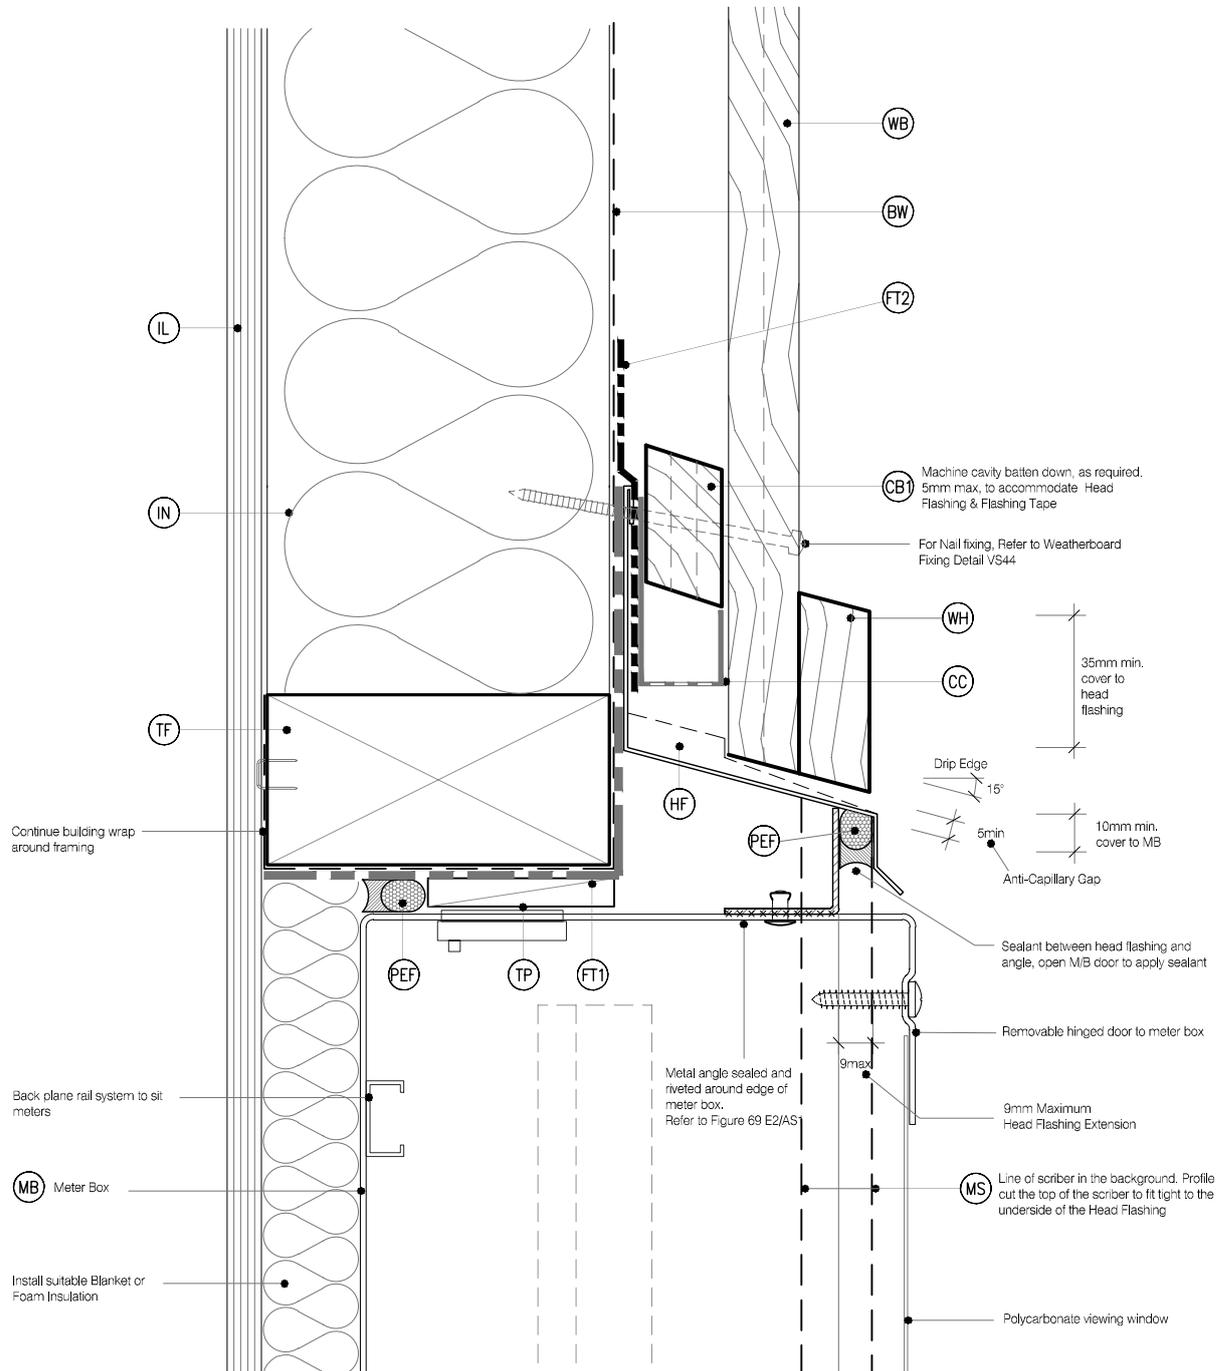

LEGEND:


- | | | |
|--|--|---|
| <p>(MB) METER BOX: Electrical meter box, with removable hinged door and polycarbonate viewing window</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or Castellated H3.2</p> <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> | <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(FT1) FLASHING TAPE: Flashing tape over wrap 70mm (50 min) turn-down required in corners only. Refer to Fig. 72 of NZBC E2/AS1</p> <p>(FT2) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped over aluminium head flashing or 2nd layer of Building Wrap, taped joint to top of timber frame</p> <p>(HF) HEAD FLASHING: Aluminium head flashing with minimum 15 degree fall, optional hemmed edges as per table 7 E2/AS1</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(PEF) PEF ROD BACKING: Foam backing rod with sealant to cavity in Window perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio)</p> | <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(TP) TIMBER PACKER: Tan H3.2 Treated Packer</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> <p>(WL) WINDOW LINER: As Specified</p> <p>(WH) WEATHERHEAD: (OPTIONAL) Southern Pine, Horizontal batten above meter box as necessary to suit profile, shaped to shed water, sealant to back of head scriber</p> <p>(MS) METER BOX SCRIBER: Southern Pine SDA18x18, sealant to back of SDA and 75 x 3.15mm 316 Stainless Steel nail in 3mm predrilled hole.</p> |
|--|--|---|

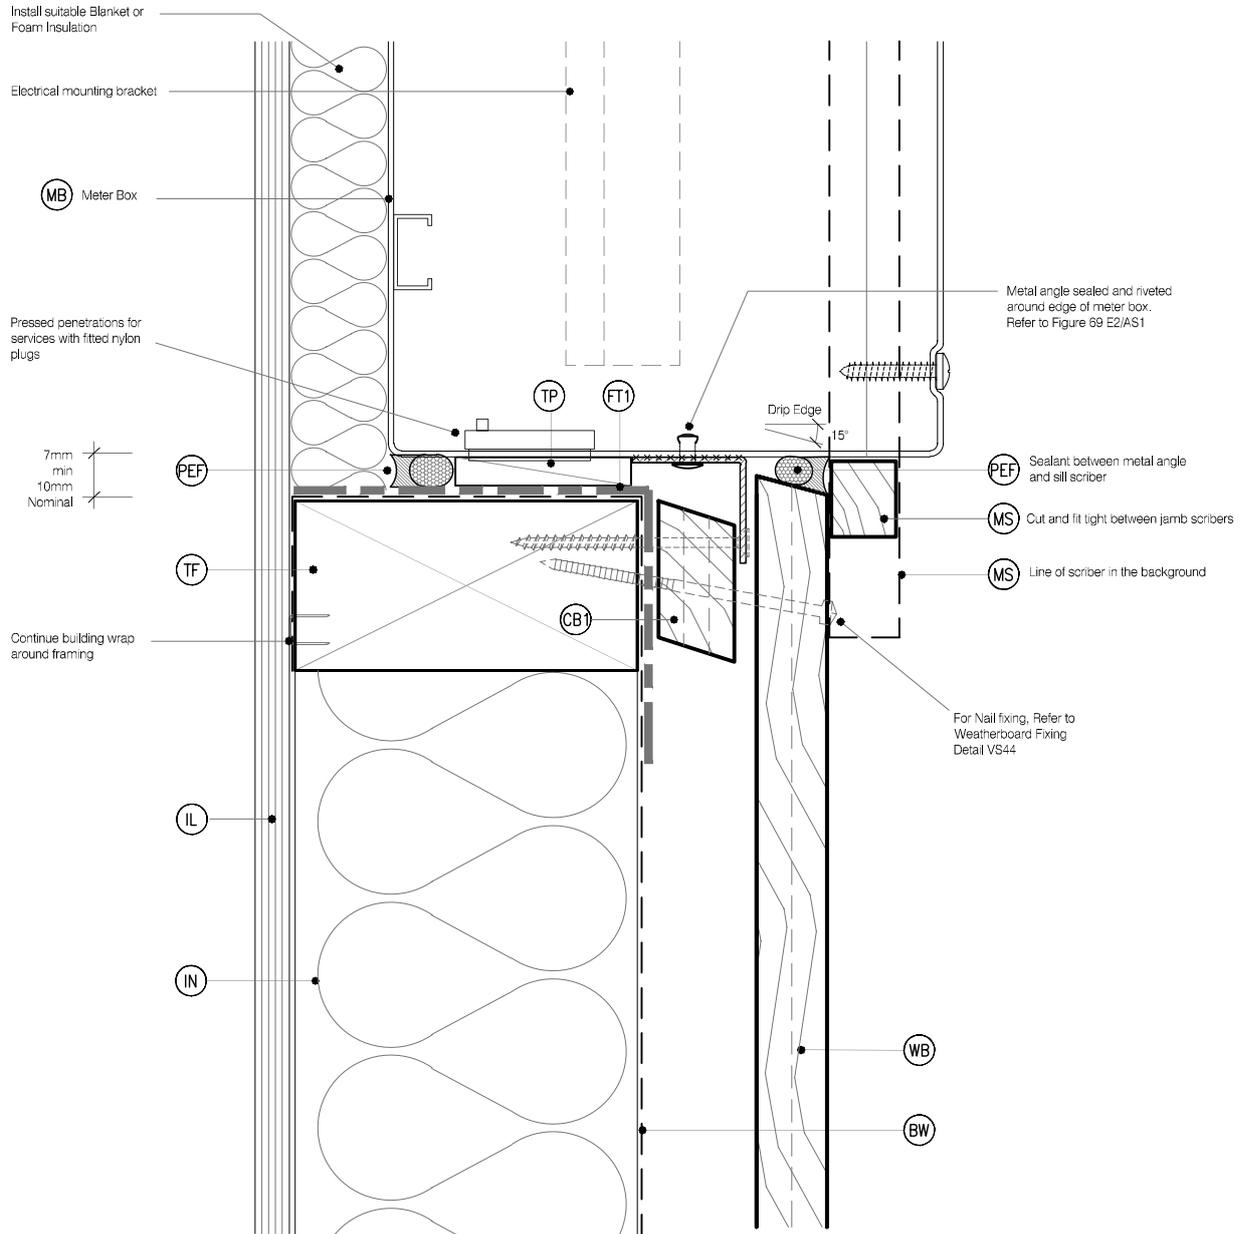

LEGEND:


- | | | |
|---|--|---|
| <p>(MB) METER BOX: Electrical meter box, with removable hinged door and polycarbonate viewing window</p> <p>(WB) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Ridgid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or Castellated H3.2</p> <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> | <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(FT1) FLASHING TAPE: Flashing tape over wrap 70mm (50 min) turn-down required in corners only. Refer to Fig. 72 of NZBC E2/AS1</p> <p>(FT2) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped over aluminium head flashing or 2nd layer of Building Wrap, taped joint to top of timber frame</p> <p>(HF) HEAD FLASHING: Aluminium head flashing with minimum 15 degree fall, optional hemmed edges as per table 7 E2/AS1</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(PEF) PEF ROD BACKING: Foam backing rod with sealant to cavity in Window perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio)</p> | <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(TP) TIMBER PACKER: Tan H3.2 Treated Packer</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> <p>(WL) WINDOW LINER: As Specified</p> <p>(WH) WEATHERHEAD: (OPTIONAL) Southern Pine, Horizontal batten above meter box as necessary to suit profile, shaped to shed water, sealant to back of head scriber</p> <p>(MS) METER BOX SCRIBER: Southern Pine SDA18x18, sealant to back of SDA and 75 x 3.15mm 316 Stainless Steel nail in 3mm predrilled hole.</p> |
|---|--|---|

METER BOX JAMB DETAIL

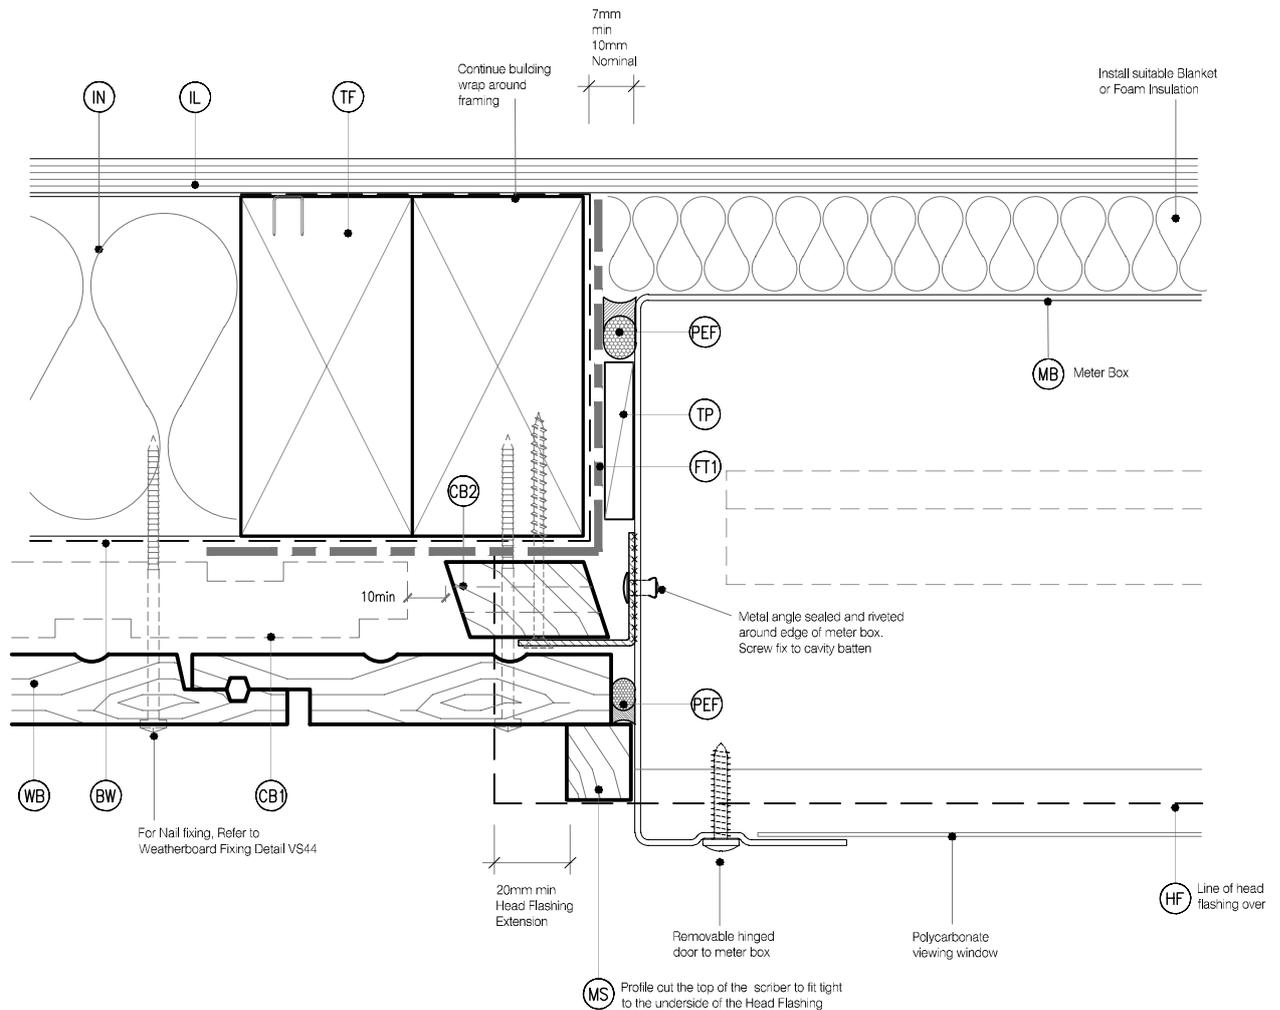


LEGEND:

- | | | |
|--|--|---|
| <p>(MB) METER BOX: Electrical meter box, with removable hinged door and polycarbonate viewing window</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or Castellated H3.2</p> <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> | <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(FT1) FLASHING TAPE: Flashing tape over wrap 70mm (50 min) turn-down required in corners only. Refer to Fig. 72 of NZBC E2/AS1</p> <p>(FT2) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped over aluminium head flashing or 2nd layer of Building Wrap, taped joint to top of timber frame</p> <p>(HF) HEAD FLASHING: Aluminium head flashing with minimum 15 degree fall, optional hemmed edges as per table 7 E2/AS1</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(PEF) PEF ROD BACKING: Foam backing rod with sealant to cavity in Window perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio)</p> | <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(TP) TIMBER PACKER: Tan H3.2 Treated Packer</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> <p>(WL) WINDOW LINER: As Specified</p> <p>(WH) WEATHERHEAD: (OPTIONAL) Southern Pine, Horizontal batten above meter box as necessary to suit profile, shaped to shed water, sealant to back of head scriber</p> <p>(MS) METER BOX SCRIBER: Southern Pine SDA18x18, sealant to back of SDA and 75 x 3.15mm 316 Stainless Steel nail in 3mm predrilled hole.</p> |
|--|--|---|

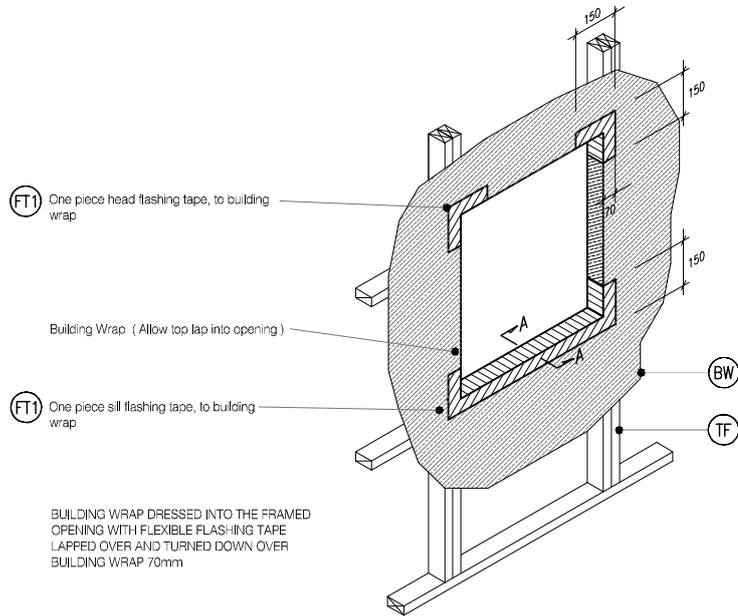

M4 TYPICAL METER BOX OPENING (FLASHING TAPE)

VS33 SCALE : N.T.S

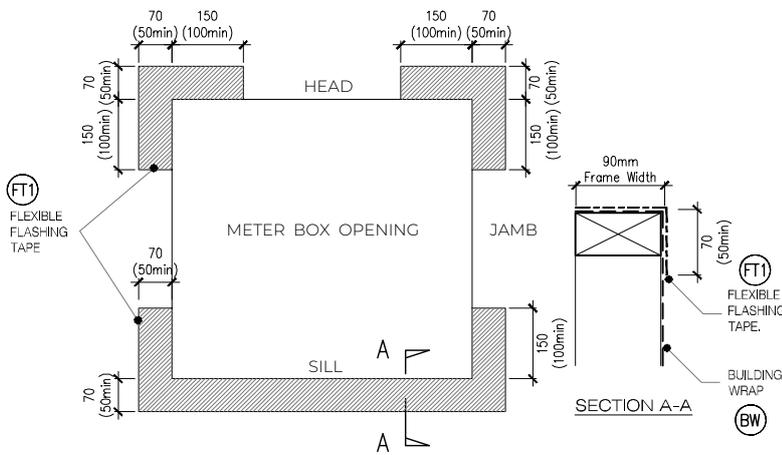

1. DENDRO is Southern Pine's premium product range of H3.2 treated, solid, clear weatherboards. Manufactured from, high quality, pruned NZ Radlata Pine. Product warranty, 25 years if used in accordance with the Installation & Maintenance Guide.
2. All Southern Pine Weatherboard profiles have been machined to be compliant with NZS 3617 and BRANZ BU411
3. The Southern Pine Weatherboard System, if designed and installed as per the Installation & Maintenance Guide, will meet


the following provisions of the New Zealand Building Code (NZBC):

- Clause B1 Structure: Performance B1.3.1, B1.3.2, B1.3.4 (a), (b), (c), (d) and (e) for the
- Clause B2 Durability: Performance B2.3.1(b) and B2.3.2(b)
- Clause E2 External Moisture: Performance E2.3.2, E2.3.3, E2.3.5, E2.3.7(b) and (c)
- Clause F2 Hazardous Building Materials: Performance F2.3.1

4. This Weatherboard System must be installed by a qualified trade person. Restricted Building Work (RBW) requires a Licensed Building Practitioner (LBP) or supervised by an LBP. It is the specifier's responsibility to ensure that the details are appropriate for the intended application and that additional detailing is obtained for a specific design or any areas that fall outside the scope of the Southern Pine Products & E2/AS1 Acceptable solution.

M5 FLEXIBLE BUILDING WRAP AT OPENING


VS33 SCALE : 1 / 5 @ A1, 1 / 10 @ A3

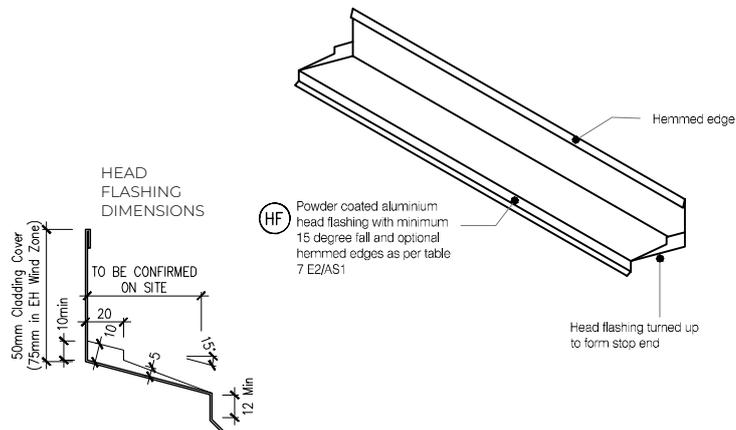

ONE PIECE PC ALUMINIUM HEAD FLASHING 15° SLOPE WITH 10mm min COVER TO JOINERY EXTEND 30mm min EITHER SIDE OF JOINERY WITH STOP ENDS


M6 TYPICAL HEAD & FLASHING JOINT

VS33 SCALE : 1 / 2 @ A1, 1 / 4 @ A3

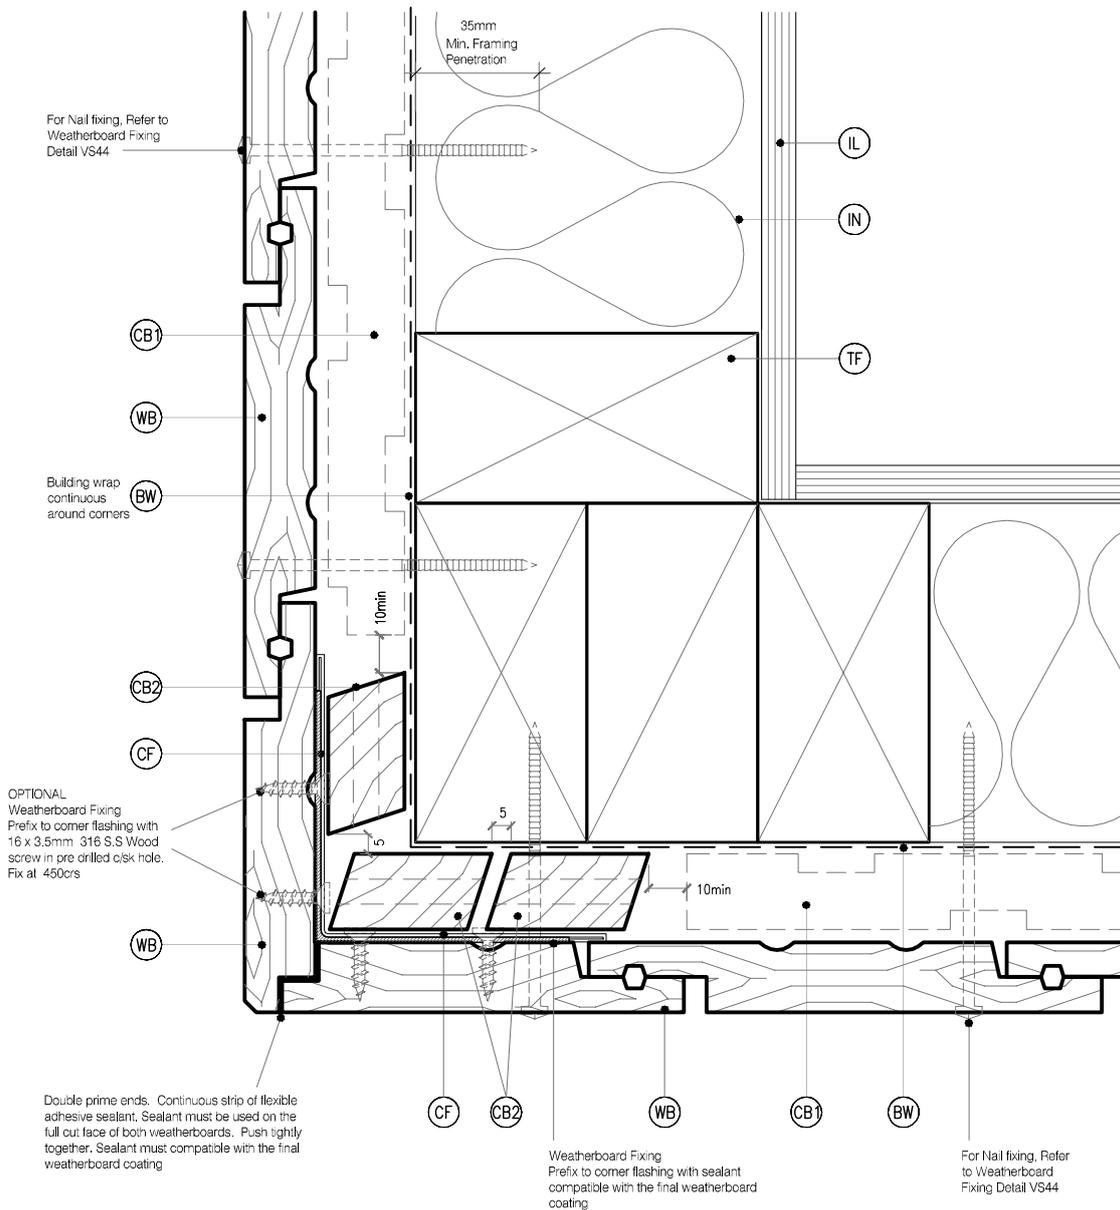


LEGEND:

- | | | |
|--|--|--|
| <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL: 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(IN) INSULATION: Selected Insulation</p> | <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED: 45mm x 45mm SP Radiata Pine, H3.2
70mm x 45mm SP Radiata Pine, H3.2
Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(FT3) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped into corner, Refer NZBC E2/AS1 4.3.11
Flashing tape is recommended due to movement that may occur in corners. Not required by E2/AS1</p> | <p>(CF) CORNER FLASHING: Aluminium, PVC or Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3
50x50 Hem or Hook to Flashing Edges
75x75 NO, Hem or Hook Required
EXTRA HIGH WIND ZONE
100x100 Hem or Hook to Flashing Edges, Refer NZBC E2/AS1 4.5.1</p> <p>(TF) TIMBER FRAME: H1.2 min Treated timber framing</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> |
|--|--|--|

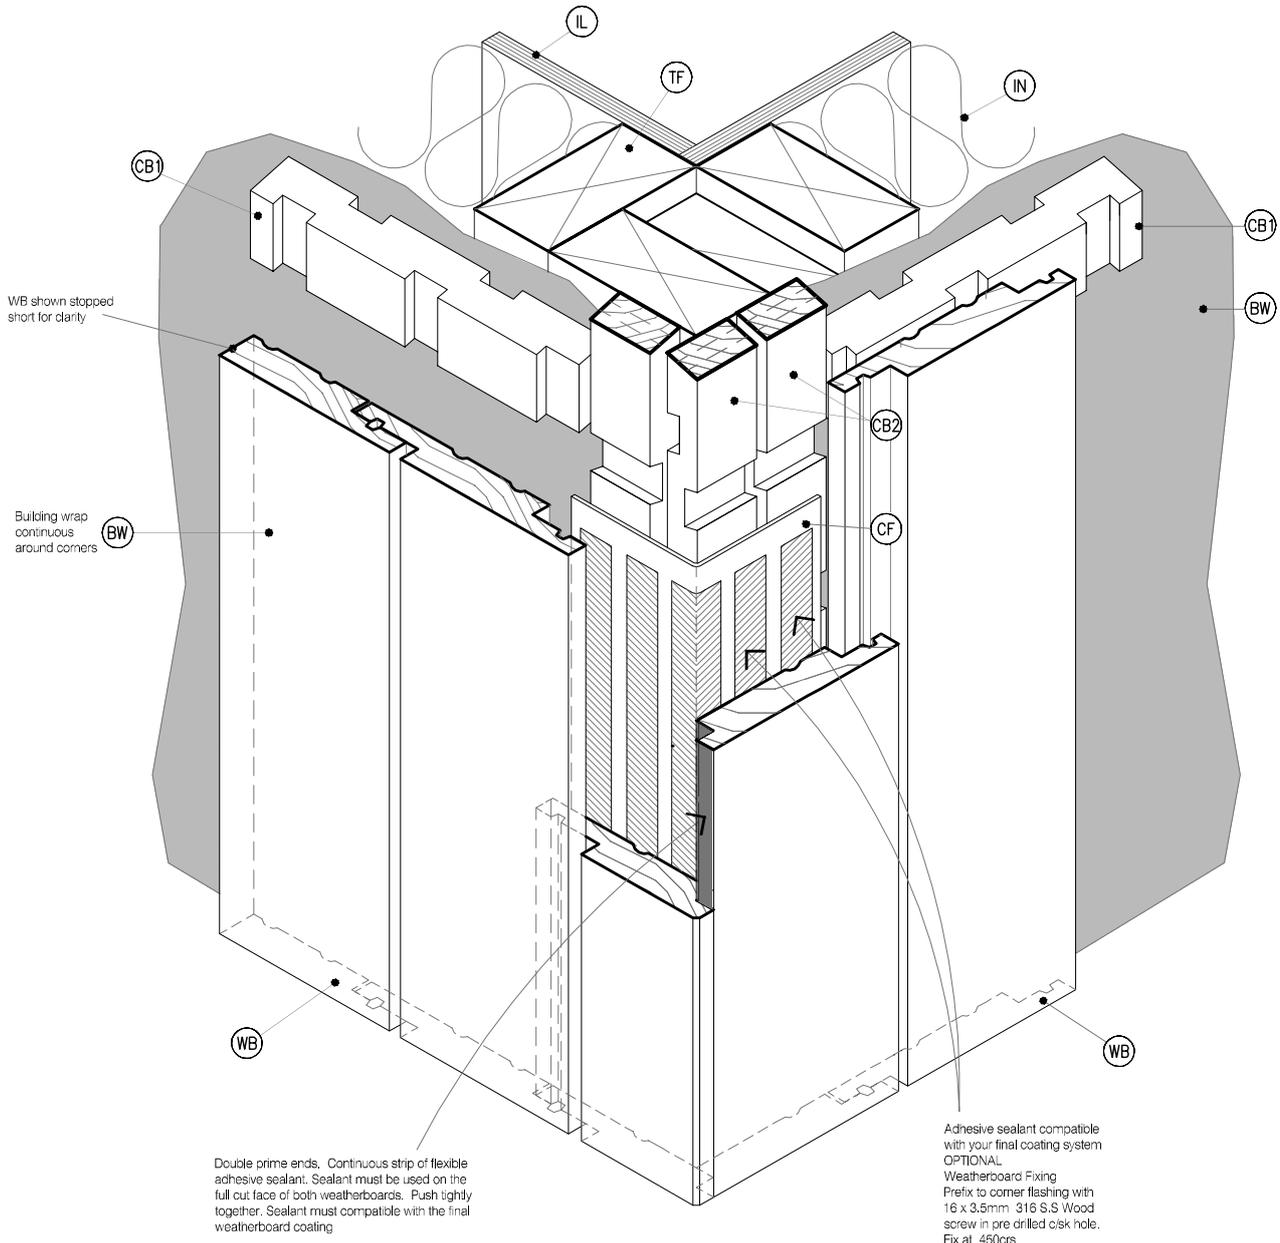

LEGEND:

- | | | |
|---|---|---|
| <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(IN) INSULATION: Selected Insulation</p> | <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2
70mm x 45mm SP Radiata Pine, H3.2
Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(FT3) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped into corner, Refer NZBC E2/AS1 4.3,11
Flashing tape is recommended due to movement that may occur in corners. Not required by E2/AS1</p> | <p>(CF) CORNER FLASHING: Aluminium, PVC or Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3
50x50 Hem or Hook to Flashing Edges
75x75 NO, Hem or Hook Required
EXTRA HIGH WIND ZONE
100x100 Hem or Hook to Flashing Edges, Refer NZBC E2/AS1 4.5.1</p> <p>(TF) TIMBER FRAME: H1.2 min Treated timber framing</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Siplap Weatherboard. Profile to NZS 3617</p> |
|---|---|---|

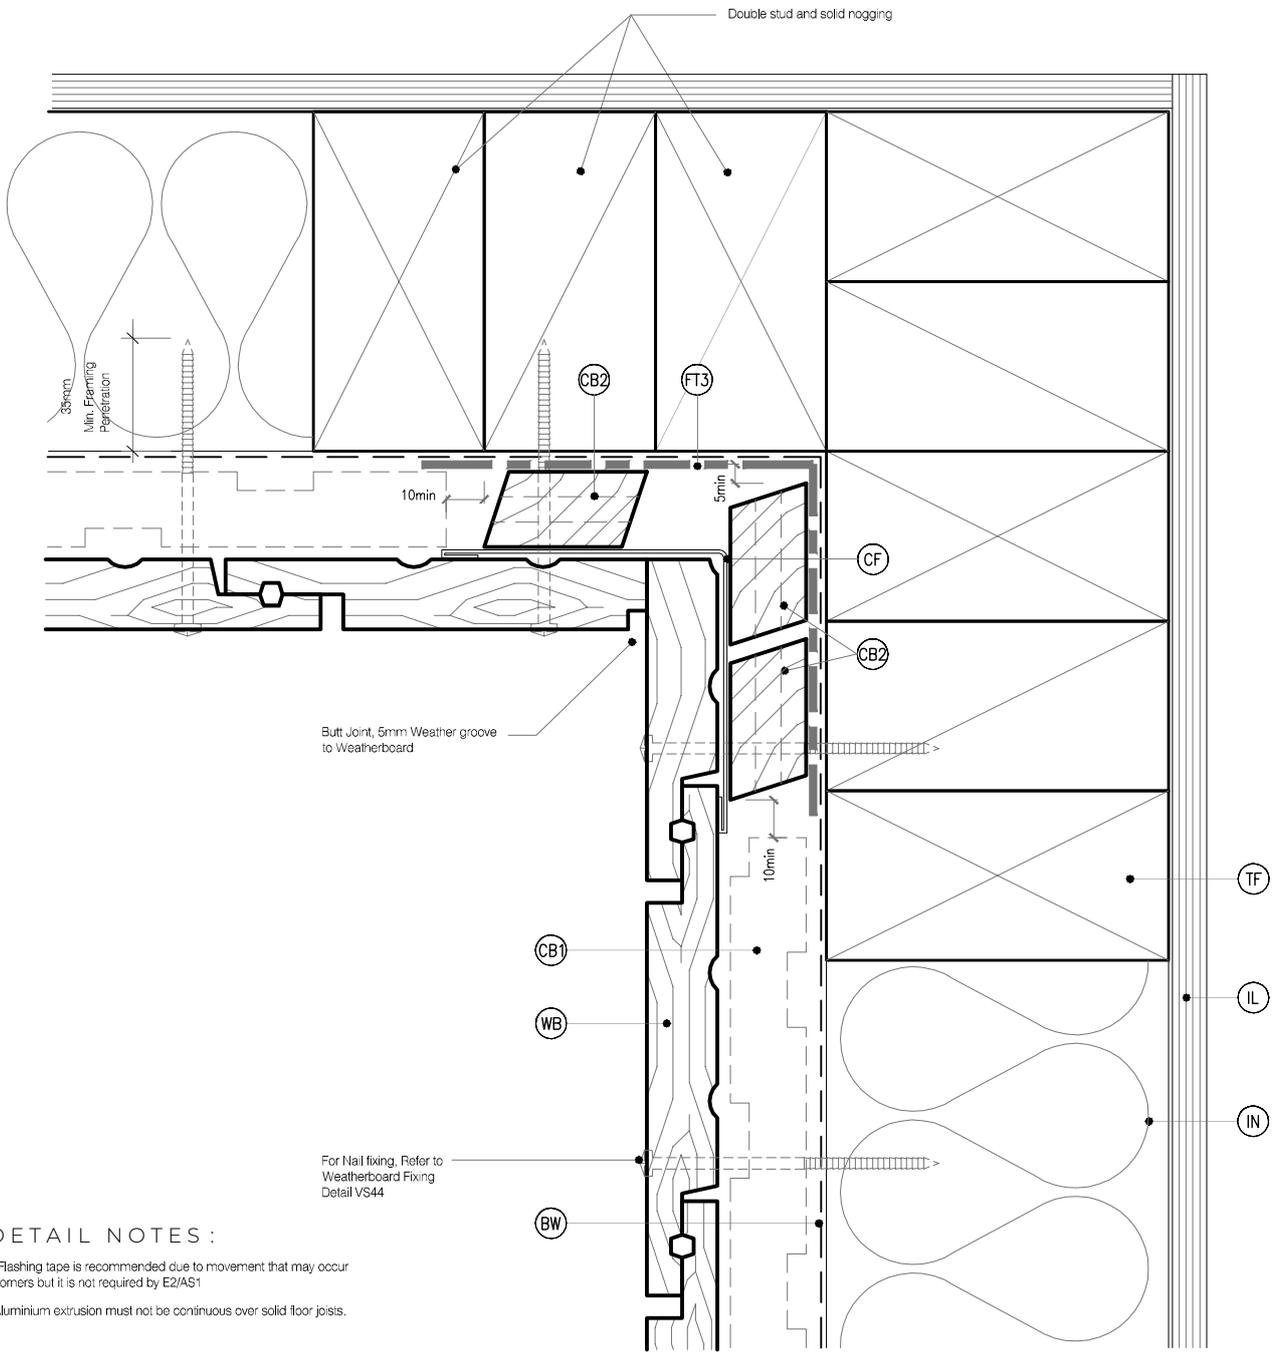


DETAIL NOTES :

- 1. Flashing tape is recommended due to movement that may occur in corners but it is not required by E2/AS1
- 2. Aluminium extrusion must not be continuous over solid floor joists.

LEGEND :


<p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(IN) INSULATION: Selected Insulation</p>	<p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(FT3) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped into corner, Refer NZBC E2/AS1 4.3.11 Flashing tape is recommended due to movement that may occur in corners. Not required by E2/AS1</p>	<p>(CF) CORNER FLASHING: Aluminium, PVC or Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3 50x50 Hem or Hook to Flashing Edges 75x75 NO, Hem or Hook Required EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges, Refer NZBC E2/AS1 4.5.1</p> <p>(TF) TIMBER FRAME: H1.2 min Treated timber framing</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p>
---	---	--

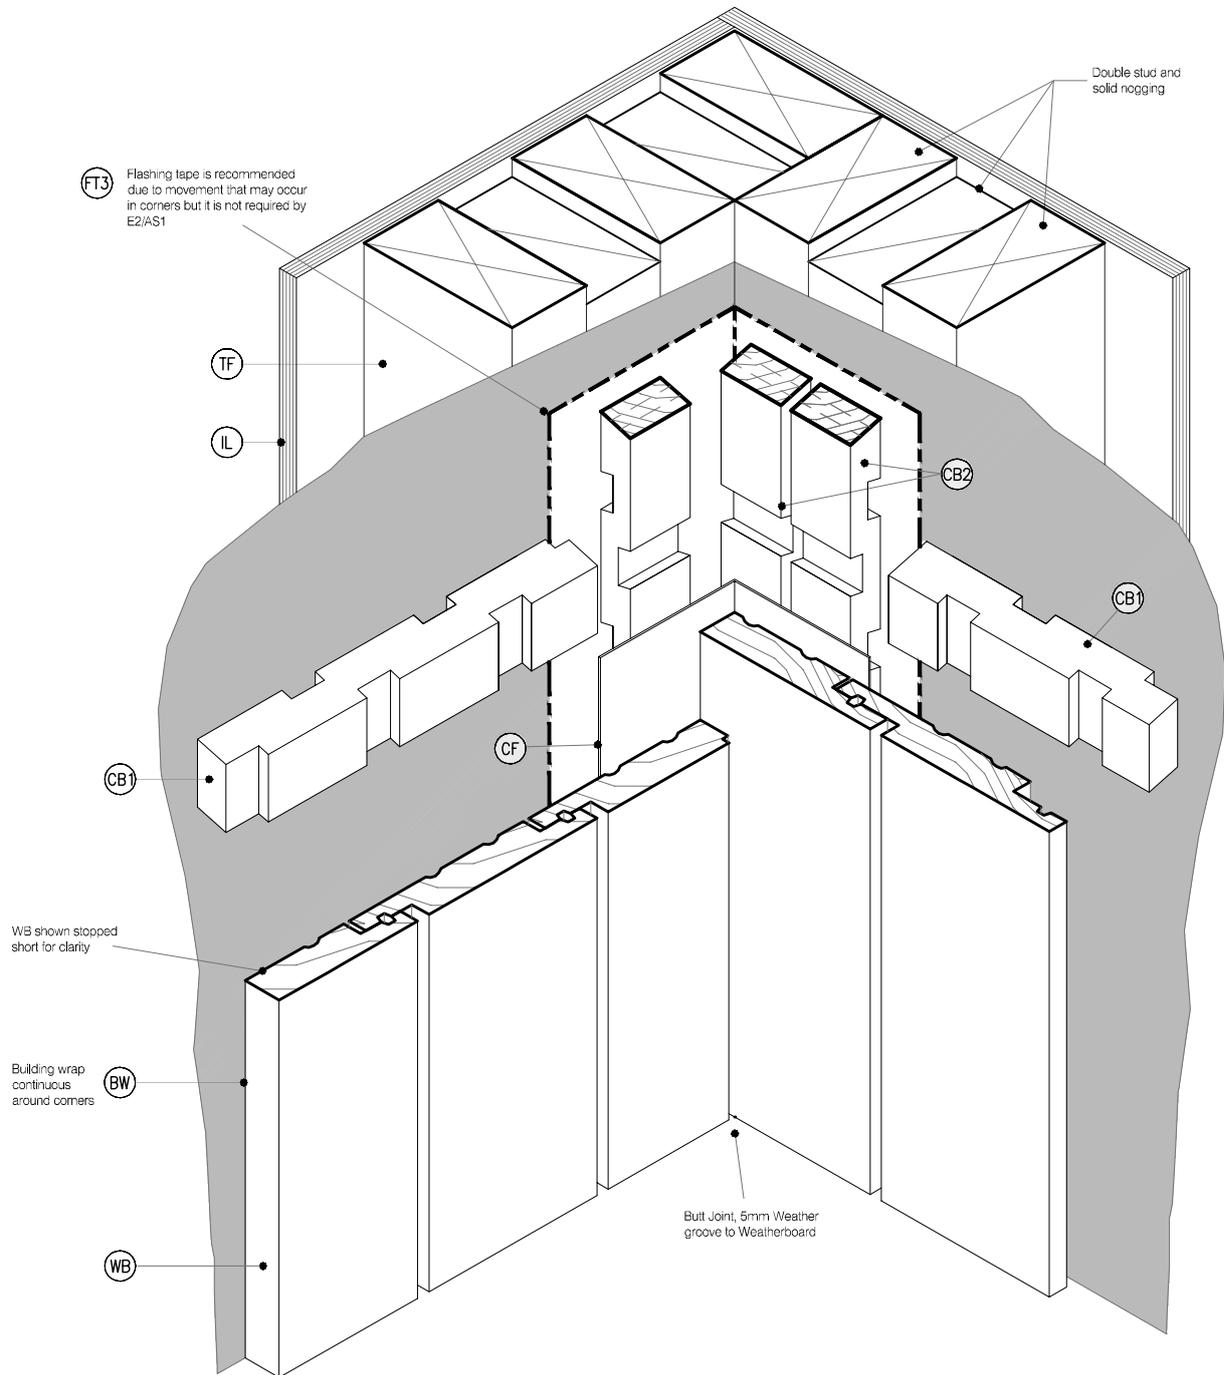

LEGEND:

- | | | |
|---|---|--|
| <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(IN) INSULATION: Selected Insulation</p> | <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(FT3) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped into corner, Refer NZBC E2/AS1 4.3.11 Flashing tape is recommended due to movement that may occur in corners. Not required by E2/AS1</p> | <p>(CF) CORNER FLASHING: Aluminium, PVC or Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3 50x50 Hem or Hook to Flashing Edges 75x75 NO, Hem or Hook Required EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges, Refer NZBC E2/AS1 4.5.1</p> <p>(TF) TIMBER FRAME: H1.2 min Treated timber framing</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> |
|---|---|--|

WEATHERBOARD FIXING

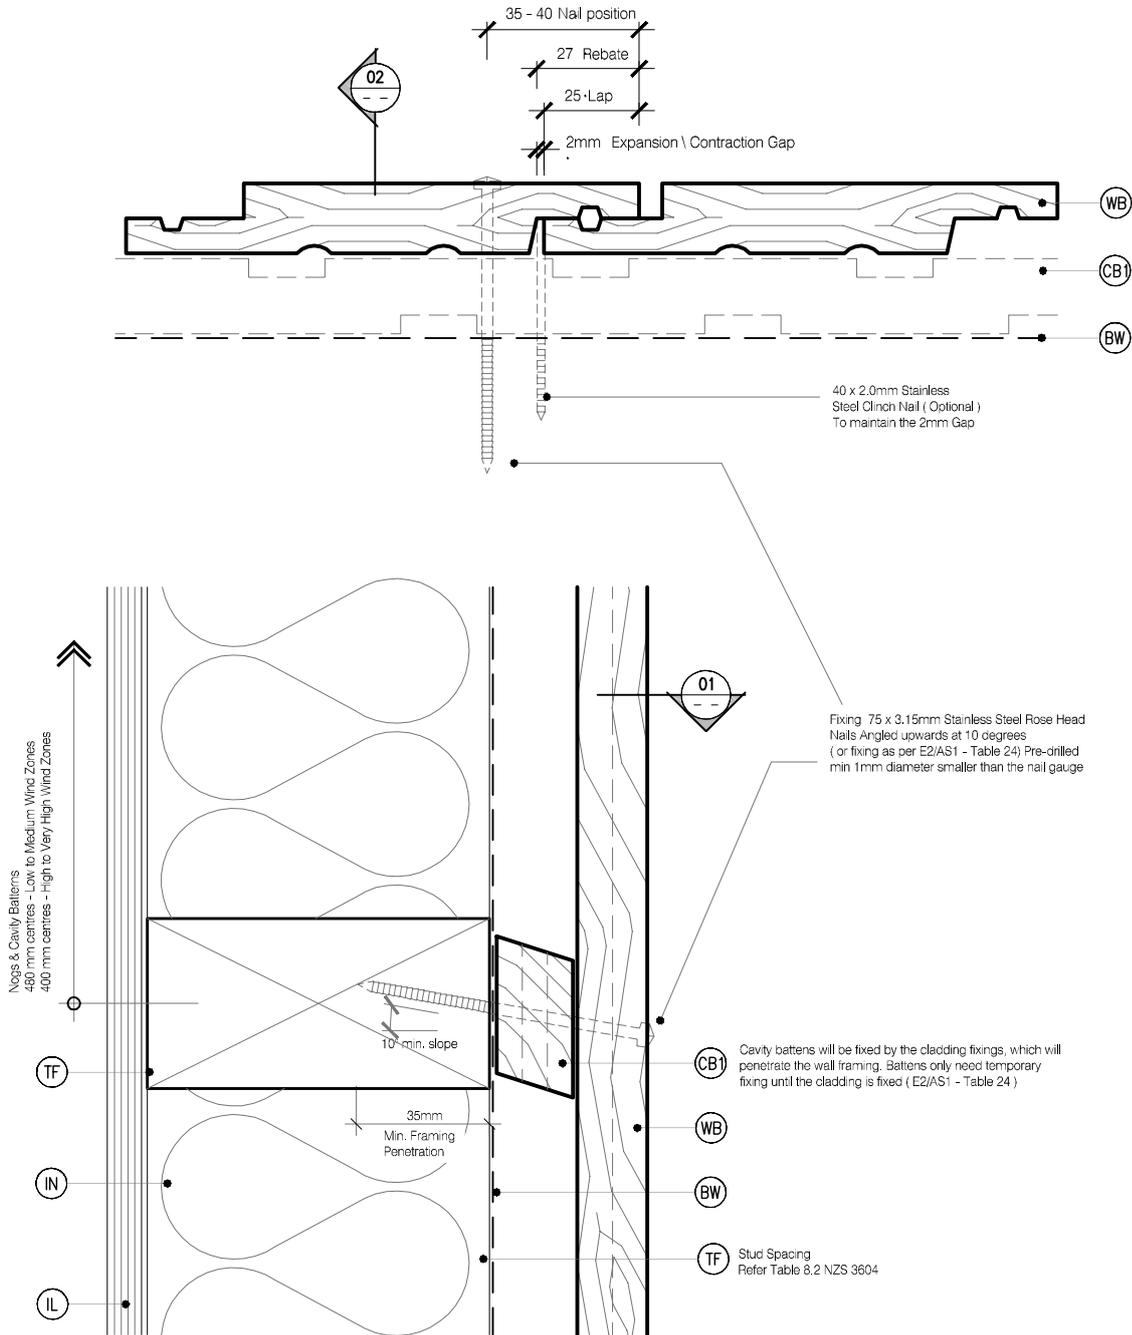


LEGEND:

- | | | |
|---|---|--|
| <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(IN) INSULATION: Selected Insulation</p> | <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2
70mm x 45mm SP Radiata Pine, H3.2
Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(FT3) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped into corner, Refer NZBC E2/AS1 4.3.11
Flashing tape is recommended due to movement that may occur in corners. Not required by E2/AS1</p> | <p>(CF) CORNER FLASHING: Aluminium, PVC or Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3
50x50 Hem or Hook to Flashing Edges
75x75 NO, Hem or Hook Required
EXTRA HIGH WIND ZONE
100x100 Hem or Hook to Flashing Edges, Refer NZBC E2/AS1 4.5.1</p> <p>(TF) TIMBER FRAME: H1.2 min Treated timber framing</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> |
|---|---|--|

LEGEND:


- | | | |
|---|---|--|
| <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(IN) INSULATION: Selected Insulation</p> | <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(FT3) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped into corner, Refer NZBC E2/AS1 4.3.11 Flashing tape is recommended due to movement that may occur in corners. Not required by E2/AS1</p> | <p>(CF) CORNER FLASHING: Aluminium, PVC or Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3 50x50 Hem or Hook to Flashing Edges 75x75 NO, Hem or Hook Required EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges, Refer NZBC E2/AS1 4.5.1</p> <p>(TF) TIMBER FRAME: H1.2 min Treated timber framing</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> |
|---|---|--|

EXTERNAL BOXED CORNER

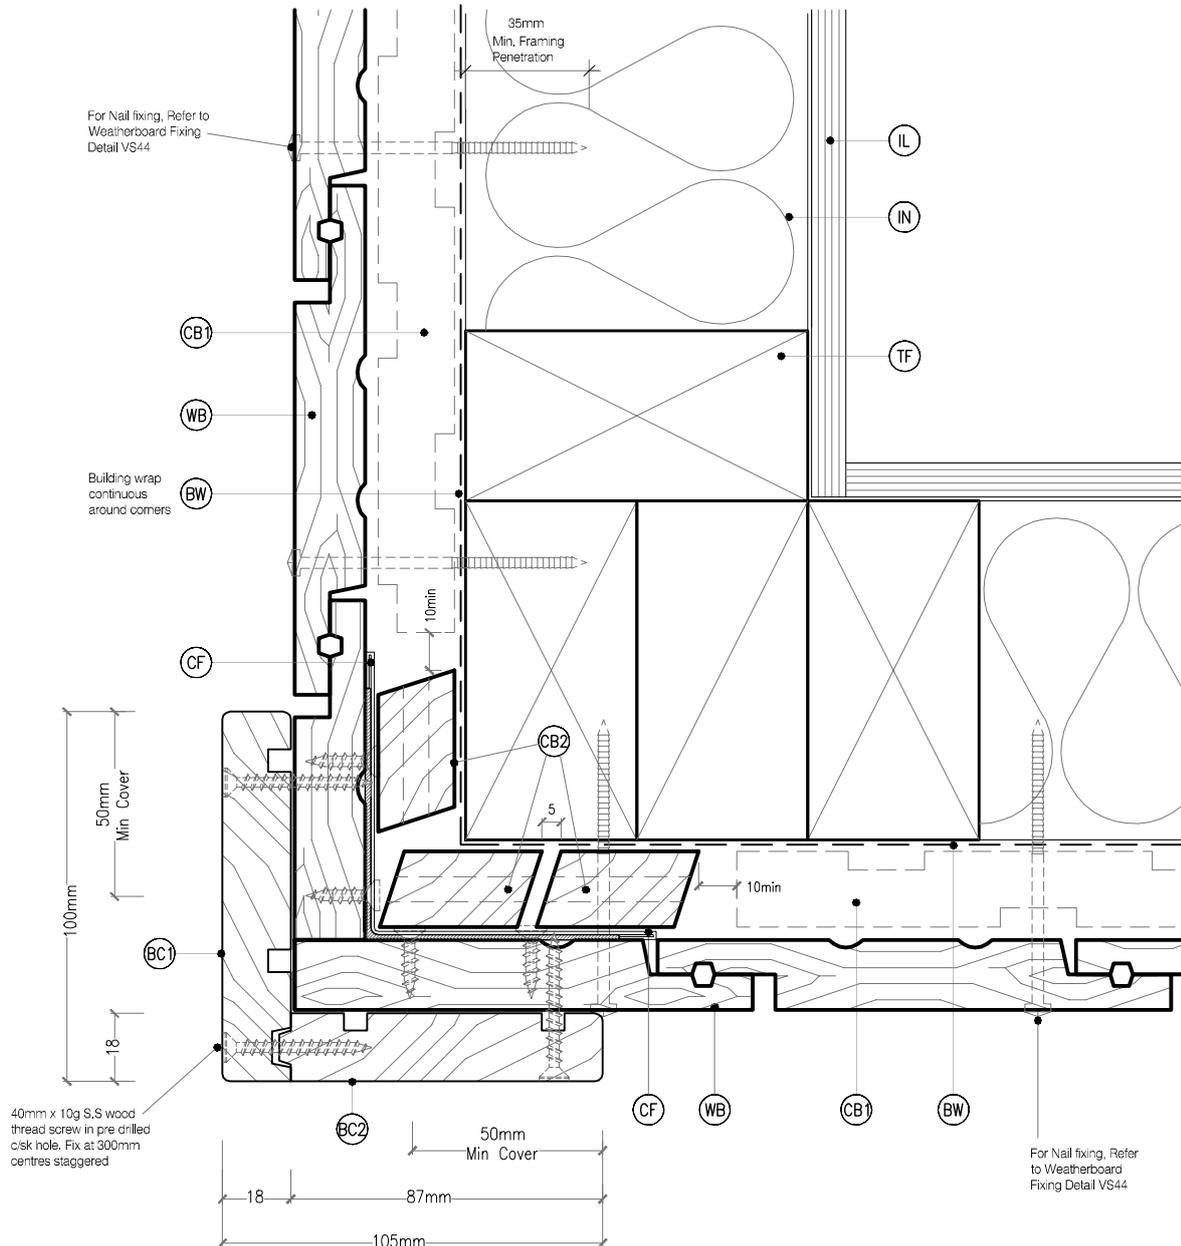

LEGEND:

- | | | |
|---|--|--|
| <p>BC1 BOXED CORNER COVER : Southern Pine 100 x 18 H3.1 External box corner</p> <p>BC2 BOXED CORNER COVER : Southern Pine 87 x 18 H3.1 Reversible box corner</p> <p>BC3 BOXED CORNER COVER : Southern Pine 100 x 18 H3.1 Internal box corner</p> <p>IL INTERNAL LINING: Selected Internal Lining</p> <p>BW BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Ridgid Underlay required (9.1.7.2 E2/AS1)</p> <p>CB1 CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> | <p>CB2 CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>CB3 CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>CF CORNER FLASHING: Aluminium, PVC or Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3 50x50 Hem or Hook to Flashing Edges 75x75 NO, Hem or Hook Required EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges, Refer NZBC E2/AS1 4.5.1</p> | <p>PEF PEF ROD BACKING: Foam backing rod with sealant to perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio)</p> <p>FT3 FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped into corner, Refer NZBC E2/AS1 4.3.11 Flashing tape is recommended due to movement that may occur in corners. (Not required by E2/AS1)</p> <p>FT4 FLEXIBLE FLASHING TAPE: Flexible flashing tape wrapped around pipe and over building wrap, Refer NZBC E2/AS1 4.3.11 & Figure 68</p> <p>IN INSULATION: Selected Insulation</p> <p>TF TIMBER FRAME: H1.2 min treated timber framing</p> <p>WB WEATHER BOARD: Souther Pine H3.2 Vertical Shiplap WB. Profile to NZS 3617</p> |
|---|--|--|

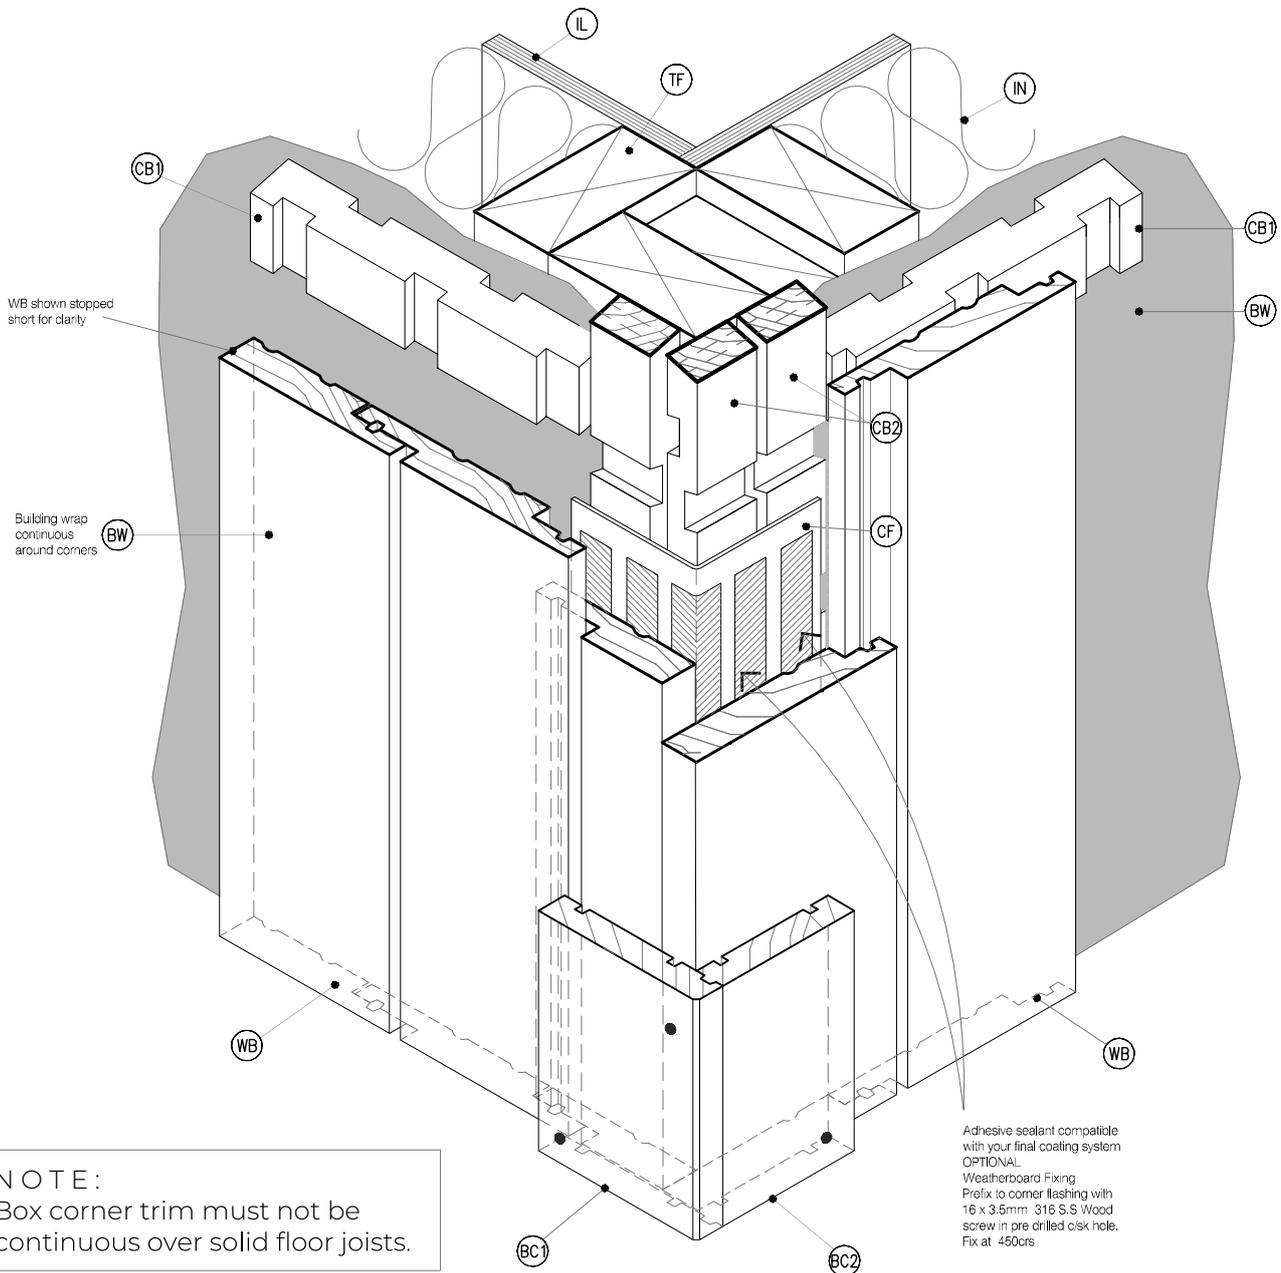

NOTE:
Box corner trim must not be continuous over solid floor joists.

Adhesive sealant compatible with your final coating system
OPTIONAL
Weatherboard Fixing
Prefix to corner flashing with 16 x 3.5mm 316 S.S Wood screw in pre drilled c/sk hole. Fix at 450c/s


LEGEND:

- BC1** BOXED CORNER COVER : Southern Pine 100 x 18 H3.1 External box corner
- BC2** BOXED CORNER COVER : Southern Pine 87 x 18 H3.1 Reversible box corner
- BC3** BOXED CORNER COVER : Southern Pine 100 x 18 H3.1 Internal box corner
- IL** INTERNAL LINING: Selected Internal Lining
- BW** BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)
- CB1** CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity

- CB2** CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2
- CB3** CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity
- CF** CORNER FLASHING: Aluminium, PVC or Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3 50x50 Hem or Hook to Flashing Edges 75x75 NO, Hem or Hook Required EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges. Refer NZBC E2/AS1 4.5.1

- PEF** PEF ROD BACKING: Foam backing rod with sealant to perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio)
- FT3** FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped into corner, Refer NZBC E2/AS1 4.3.11 Flashing tape is recommended due to movement that may occur in corners. (Not required by E2/AS1)
- FT4** FLEXIBLE FLASHING TAPE: Flexible flashing tape wrapped around pipe and over building wrap, Refer NZBC E2/AS1 4.3.11 & Figure 68
- IN** INSULATION: Selected Insulation
- TF** TIMBER FRAME: H1.2 min treated timber framing
- WB** WEATHER BOARD: Southern Pine H3.2 Vertical Shiplap WB. Profile to NZS 3617

INTERNAL BOXED CORNER

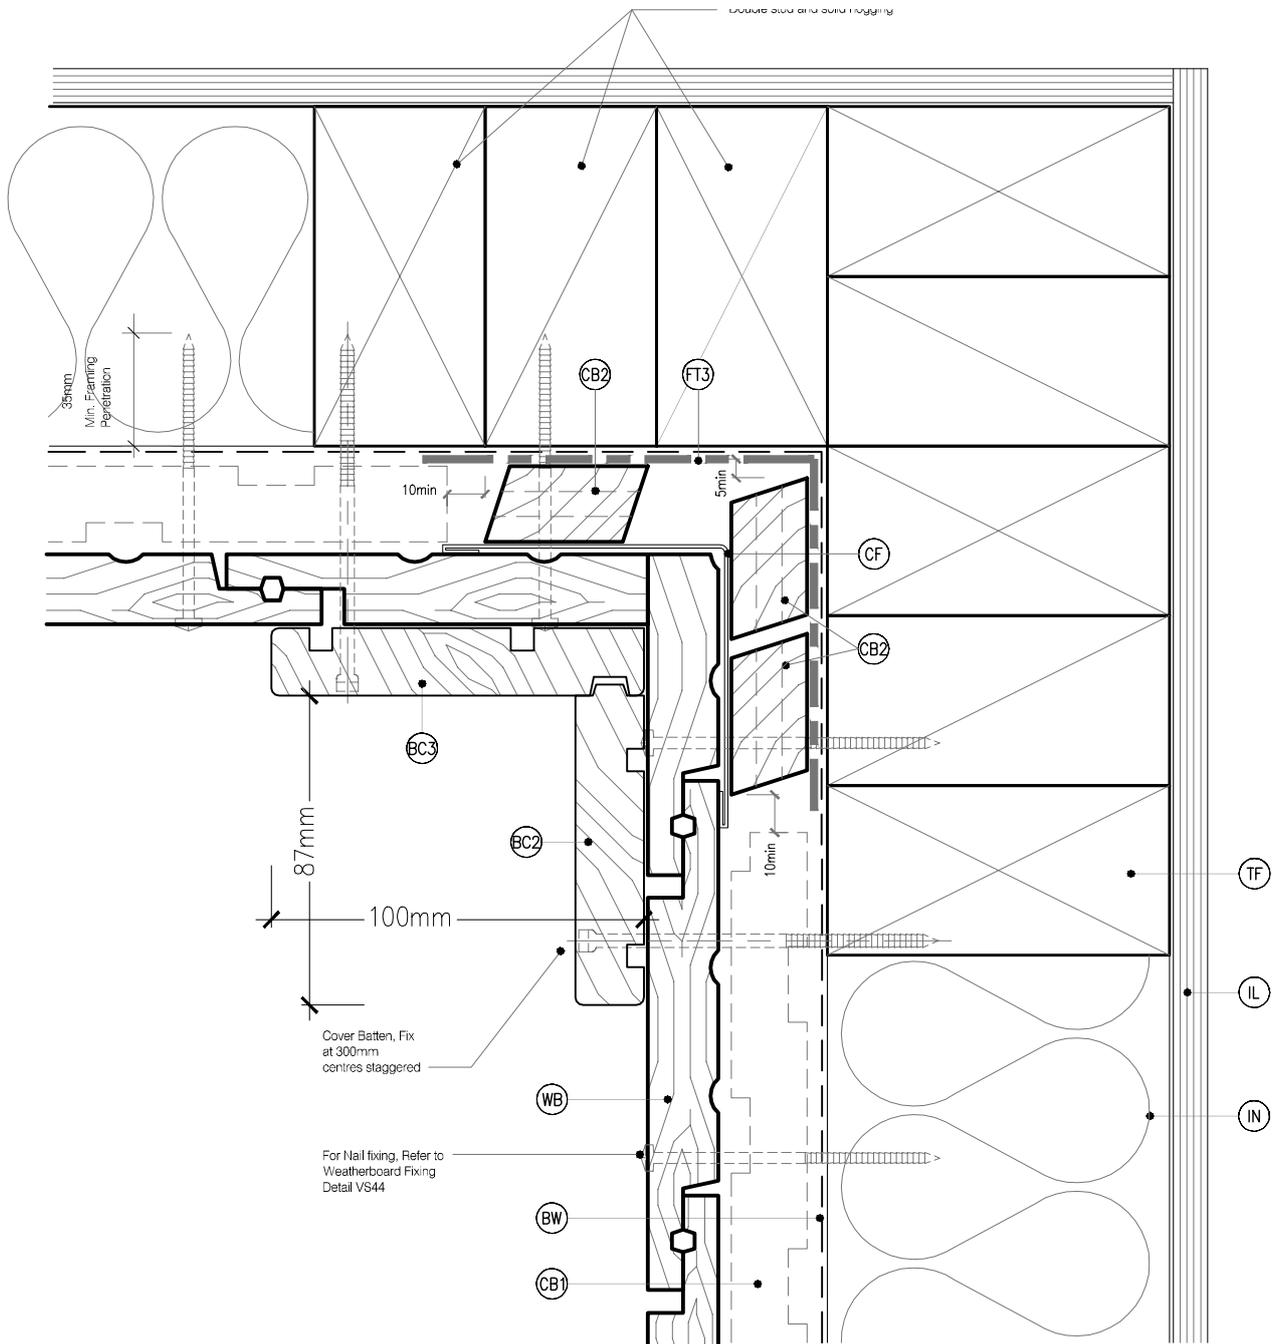

DETAIL NOTES :


1. Flashing tape is recommended due to movement that may occur in corners but it is not required by E2/AS1
2. All sealant applications must not be continuous over radial face joints.

LEGEND :

- BC1** BOXED CORNER COVER : Southern Pine 100 x 18 H3.1 External box corner
- BC2** BOXED CORNER COVER : Southern Pine 87 x 18 H3.1 Reversible box corner
- BC3** BOXED CORNER COVER : Southern Pine 100 x 18 H3.1 Internal box corner
- IL** INTERNAL LINING: Selected Internal Lining
- BW** BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)
- CB1** CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castllated with a 18 degree bevelled slope. To form a 20mm cavity


- CB2** CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2
- CB3** CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castllated with a 18 degree bevelled slope. To form a 45mm cavity
- CF** CORNER FLASHING: Aluminium, PVC or Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3 50x50 Hem or Hook to Flashing Edges 75x75 NO, Hem or Hook Required EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges, Refer NZBC E2/AS1 4.5.1

- PEF** PEF ROD BACKING: Foam backing rod with sealant to perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio)
- FT3** FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped into corner, Refer NZBC E2/AS1 4.3.11 Flashing tape is recommended due to movement that may occur in corners. (Not required by E2/AS1)
- FT4** FLEXIBLE FLASHING TAPE: Flexible flashing tape wrapped around pipe and over building wrap, Refer NZBC E2/AS1 4.3.11 & Figure 68
- IN** INSULATION: Selected Insulation
- TF** TIMBER FRAME: H1.2 min treated timber framing
- WB** WEATHER BOARD: Souther Pine H3.2 Vertical Shiplap WB. Profile to NZS 3617

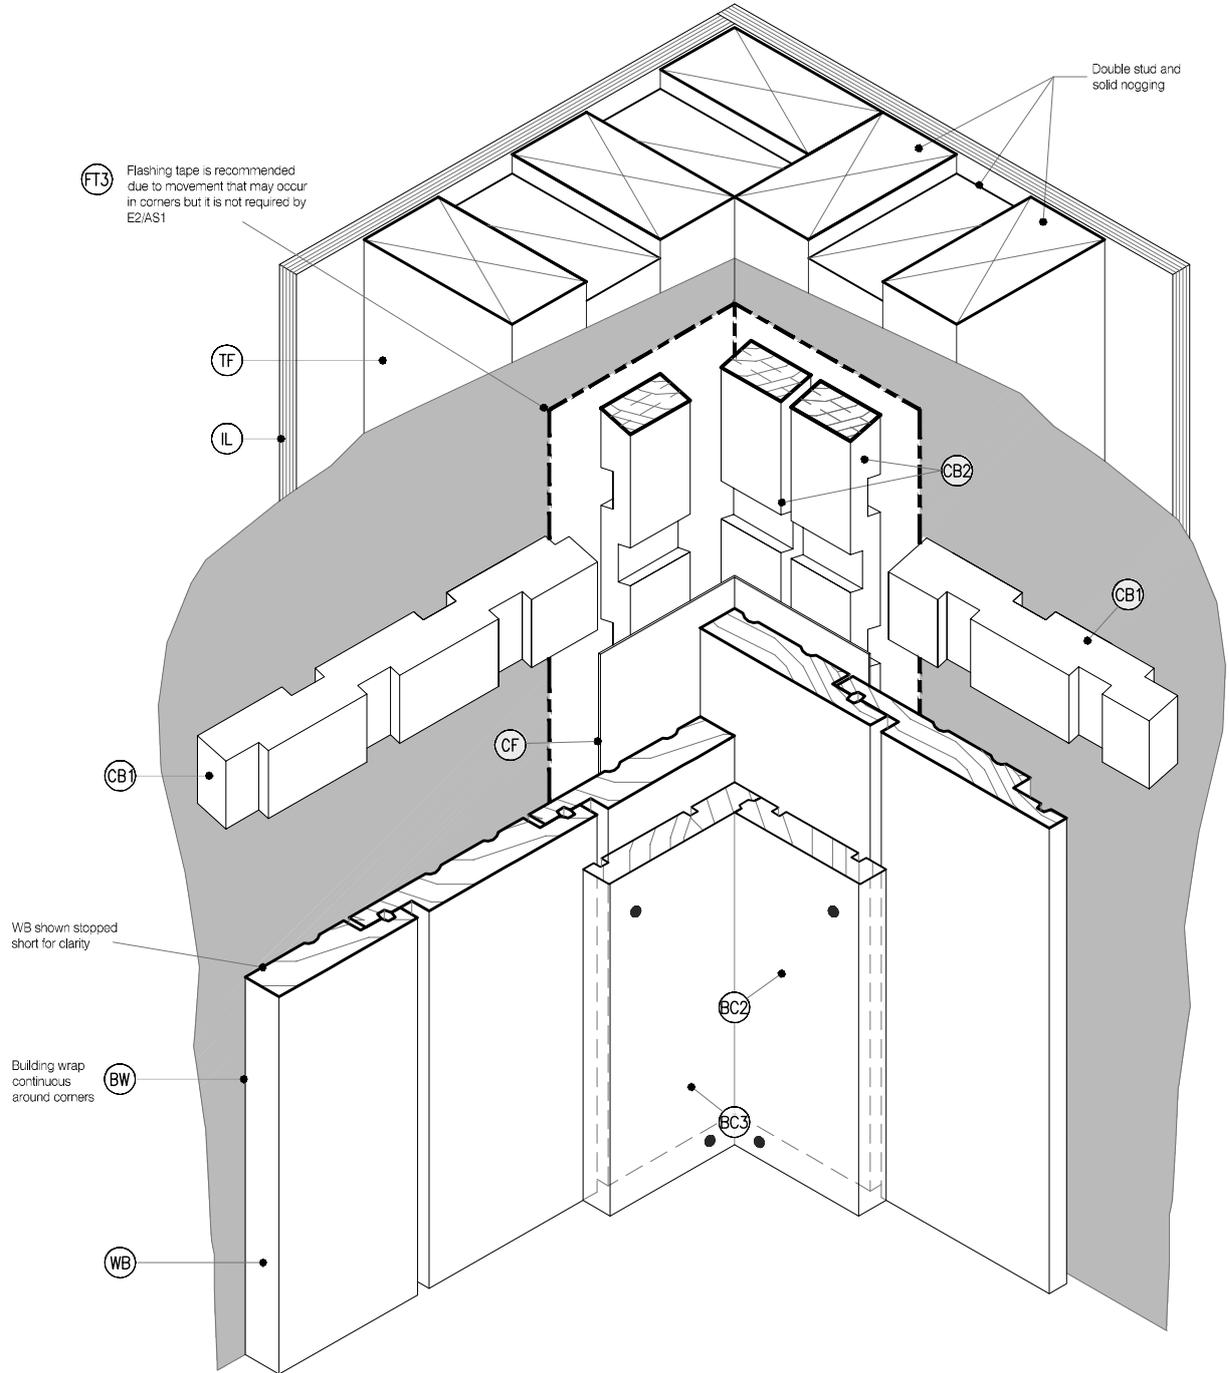


LEGEND:

- | | | |
|--|--|---|
| <p>BC1 BOXED CORNER COVER : Southern Pine 100 x 18 H3.1 External box corner</p> <p>BC2 BOXED CORNER COVER : Southern Pine 87 x 18 H3.1 Reversible box corner</p> <p>BC3 BOXED CORNER COVER : Southern Pine 100 x 18 H3.1 Internal box corner</p> <p>IL INTERNAL LINING: Selected Internal Lining</p> <p>BW BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>CB1 CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> | <p>CB2 CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>CB3 CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>CF CORNER FLASHING: Aluminium, PVC or Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3 50x50 Hem or Hook to Flashing Edges 75x75 NO, Hem or Hook Required EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges, Refer NZBC E2/AS1 4.5.1</p> | <p>PEF PEF ROD BACKING: Foam backing rod with sealant to perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio)</p> <p>FT3 FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped into corner, Refer NZBC E2/AS1 4.3.11 Flashing tape is recommended due to movement that may occur in corners. (Not required by E2/AS1)</p> <p>FT4 FLEXIBLE FLASHING TAPE: Flexible flashing tape wrapped around pipe and over building wrap, Refer NZBC E2/AS1 4.3.11 & Figure 68</p> <p>IN INSULATION: Selected Insulation</p> <p>TF TIMBER FRAME: H1.2 min treated timber framing</p> <p>WB WEATHER BOARD: Souther Pine H3.2 Vertical Shiplap WB. Profile to NZS 3617</p> |
|--|--|---|

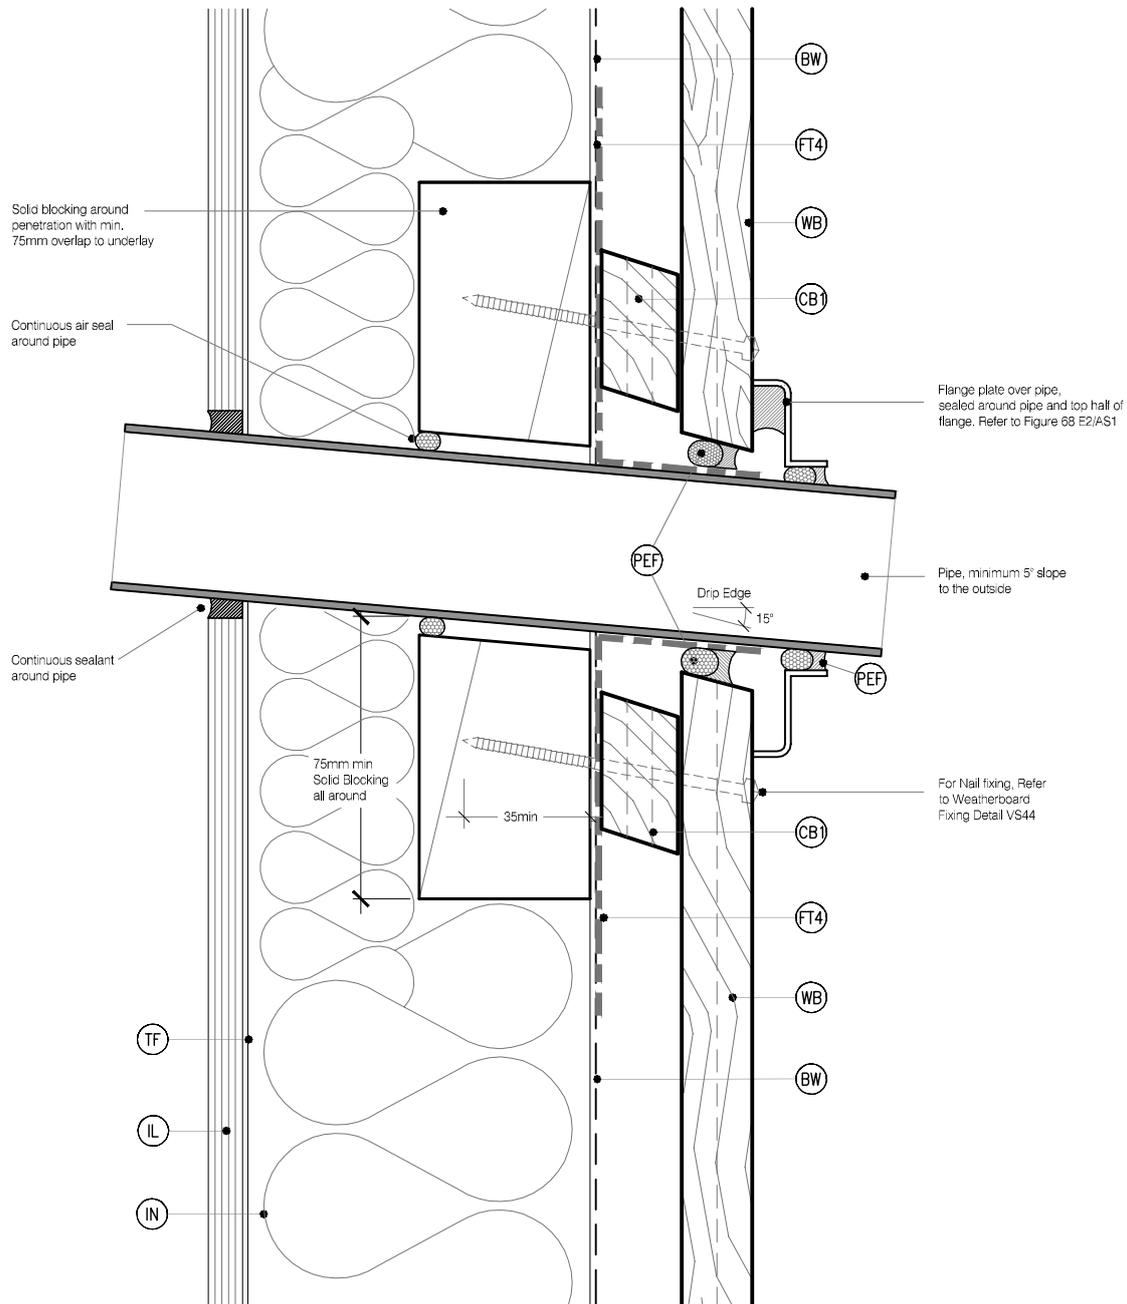

LEGEND:

<p>BC1 BOXED CORNER COVER : Southern Pine 100 x 18 H3.1 External box corner</p> <p>BC2 BOXED CORNER COVER : Southern Pine 87 x 18 H3.1 Reversible box corner</p> <p>BC3 BOXED CORNER COVER : Southern Pine 100 x 18 H3.1 Internal box corner</p> <p>IL INTERNAL LINING: Selected Internal Lining</p> <p>BW BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>CB1 CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p>	<p>CB2 CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>CB3 CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>CF CORNER FLASHING: Aluminium, PVC or Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3 50x50 Hem or Hook to Flashing Edges 75x75 NO, Hem or Hook Required EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges, Refer NZBC E2/AS1 4.5.1</p>	<p>PEF PEF ROD BACKING: Foam backing rod with sealant to perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio)</p> <p>FT3 FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped into corner, Refer NZBC E2/AS1 4.3.11 Flashing tape is recommended due to movement that may occur in corners. (Not required by E2/AS1)</p> <p>FT4 FLEXIBLE FLASHING TAPE: Flexible flashing tape wrapped around pipe and over building wrap, Refer NZBC E2/AS1 4.3.11 & Figure 68</p> <p>IN INSULATION: Selected Insulation</p> <p>TF TIMBER FRAME: H1.2 min treated timber framing</p> <p>WB WEATHER BOARD: Southern Pine H3.2 Vertical Shiplap WB. Profile to NZS 3617</p>
--	--	--

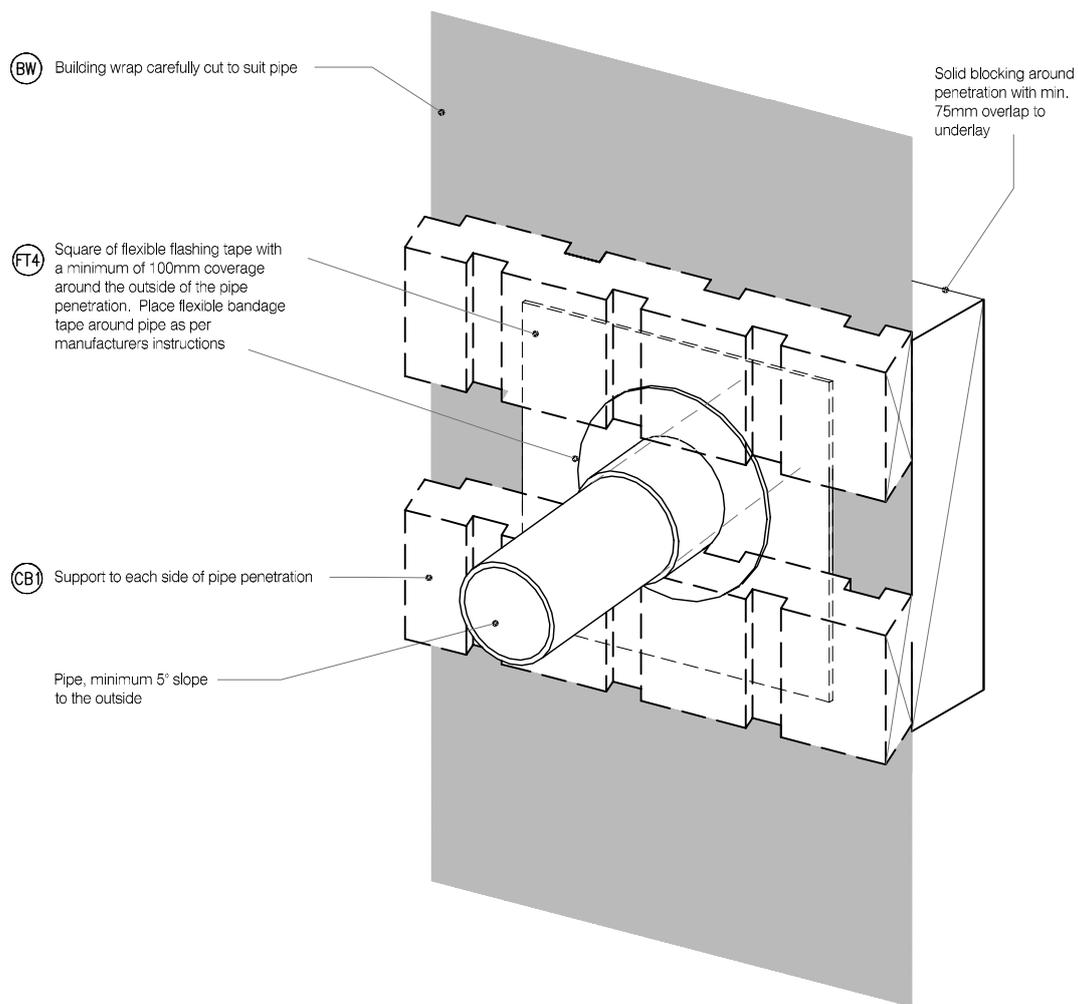


LEGEND:

- (BC1) BOXED CORNER COVER : Southern Pine 100 x 18 H3.1 External box corner
- (BC2) BOXED CORNER COVER : Southern Pine 87 x 18 H3.1 Reversible box corner
- (BC3) BOXED CORNER COVER : Southern Pine 100 x 18 H3.1 Internal box corner
- (IL) INTERNAL LINING: Selected Internal Lining
- (BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)
- (CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity

- (CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2
- (CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity
- (CF) CORNER FLASHING: Aluminium, PVC or Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3 50x50 Hem or Hook to Flashing Edges 75x75 NO, Hem or Hook Required EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges, Refer NZBC E2/AS1 4.5.1


- (PEF) PEF ROD BACKING: Foam backing rod with sealant to perimeter that forms a waterproof air-seal. (Sealant 2:1 Ratio)
- (FT3) FLEXIBLE FLASHING TAPE: Flexible flashing tape lapped into corner, Refer NZBC E2/AS1 4.3.11 Flashing tape is recommended due to movement that may occur in corners. (Not required by E2/AS1)
- (FT4) FLEXIBLE FLASHING TAPE: Flexible flashing tape wrapped around pipe and over building wrap, Refer NZBC E2/AS1 4.3.11 & Figure 68
- (IN) INSULATION: Selected Insulation
- (TF) TIMBER FRAME: H1.2 min treated timber framing
- (WB) WEATHER BOARD: Souther Pine H3.2 Vertical Shiplap WB. Profile to NZS 3617

BASE OF WALL TIMBER

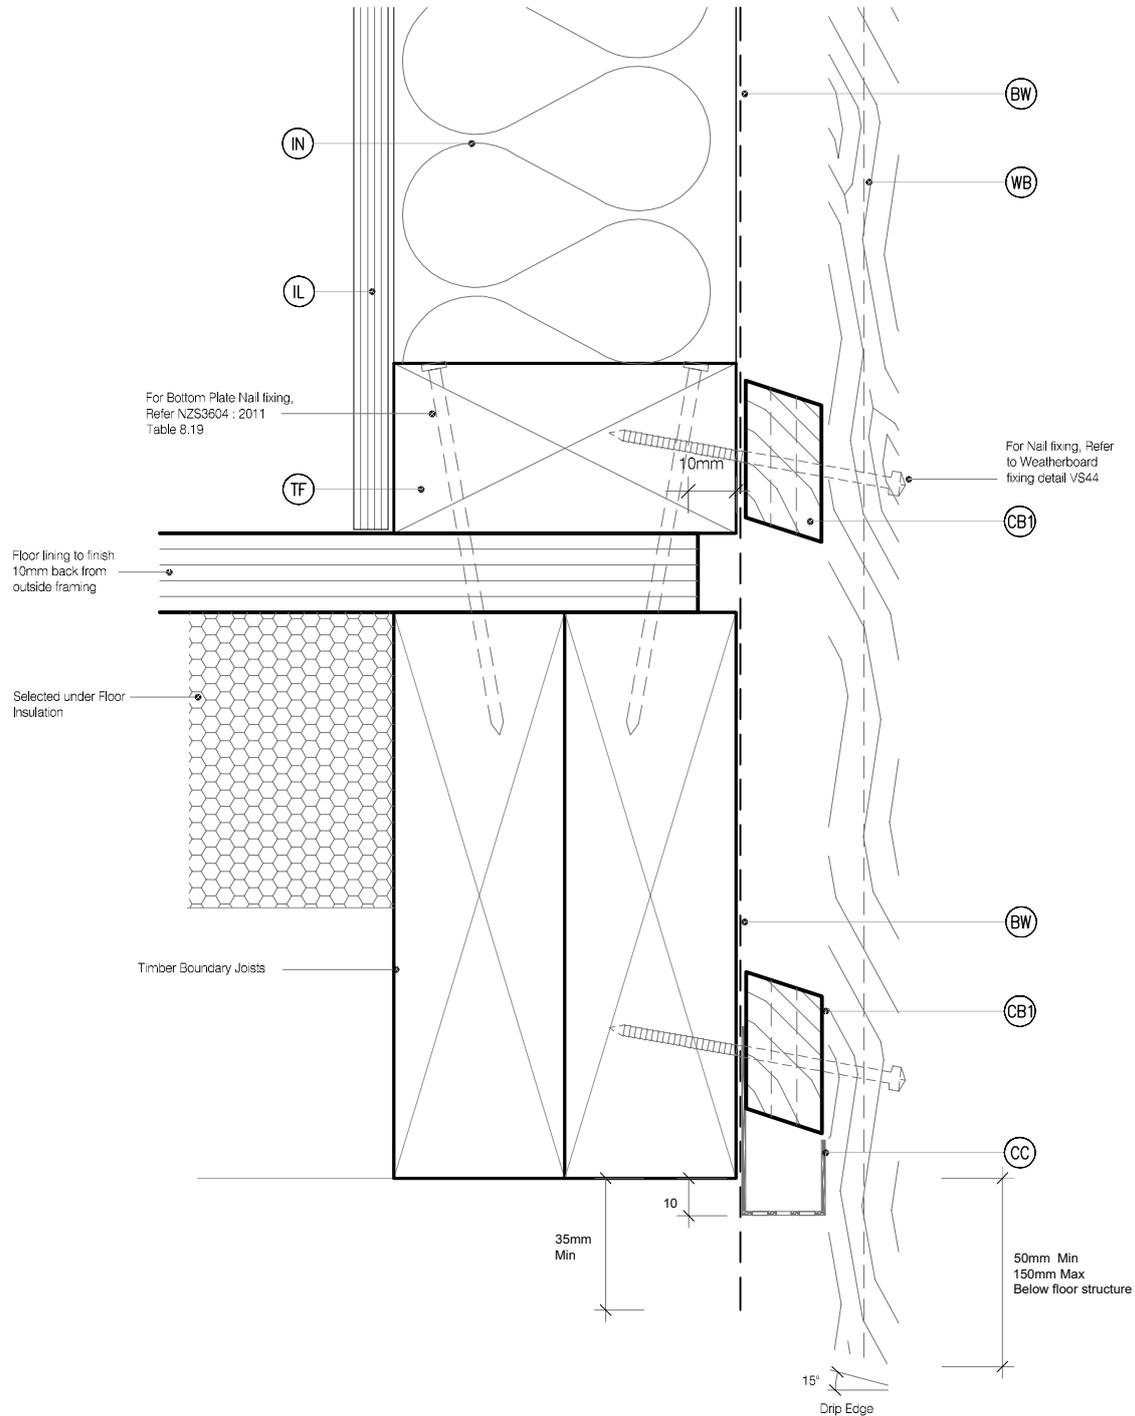

LEGEND:


- | | | |
|--|--|---|
| <p>(AF) APRON FLASHING: Materials as per E2/AS1 4.0, Coating to match roofing material or refer E2/AS1 Table 21. Flashing Cover 130mm min. (L, M & H $\geq 10^\circ$) All others 200mm Refer Table 7 E2/AS1</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> | <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(HS) HEAD SOFFIT SCRIBER: Southern Pine Eaves Mould EM40x27. Fix with 75 x 3.15mm 316 S.S nail in 2.5mm predrilled hole</p> | <p>(MR) METAL ROOFING : Selected Metal Roofing</p> <p>(SL) SOFFIT LINING: Selected Soffit Lining</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(TP) TIMBER PACKER: H3.2 treated at 300crs to allow ventilation over the top of the wall.</p> <p>(RU) ROOFING UNDERLAY: Selected Roofing Underlay As Per AS/AZS4200 with Mesh or Self Supported</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> |
|--|--|---|

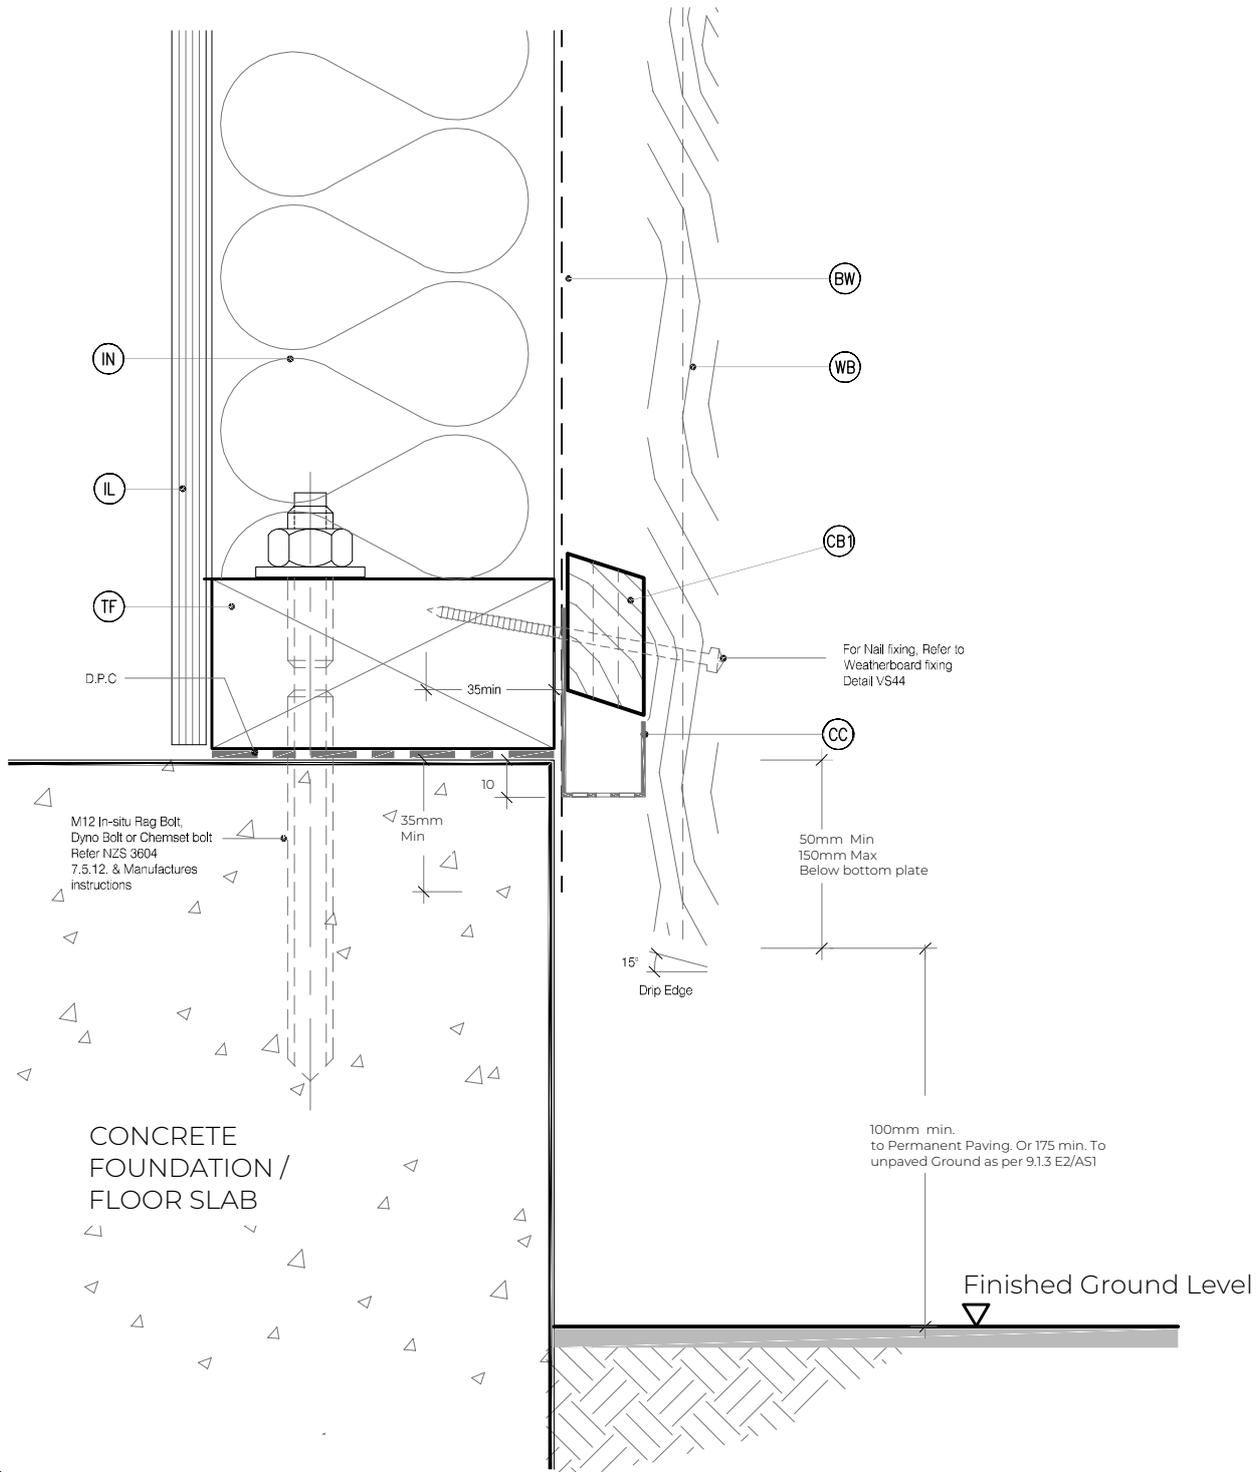

LEGEND:


- | | | |
|--|--|---|
| <p>(AF) APRON FLASHING: Materials as per E2/AS1 4.0, Coating to match roofing material or refer E2/AS1 Table 21, Flashing Cover 130mm min, (L,M & H $\geq 10^\circ$) All others 200mm Refer Table 7 E2/AS1</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Ridgid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> | <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(HS) HEAD SOFFIT SCRIBER: Southern Pine Eaves Mould EM40x27. Fix with 75 x 3.15mm 316 S.S nail in 2.5mm predrilled hole</p> | <p>(MR) METAL ROOFING : Selected Metal Roofing</p> <p>(SL) SOFFIT LINING: Selected Soffit Lining</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(TP) TIMBER PACKER: H3.2 treated at 300crs to allow ventilation over the top of the wall.</p> <p>(RU) ROOFING UNDERLAY: Selected Roofing Underlay As Per AS/AZS4200 with Mesh or Self Supported</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> |
|--|--|---|

SOFFIT DETAIL AT WALL

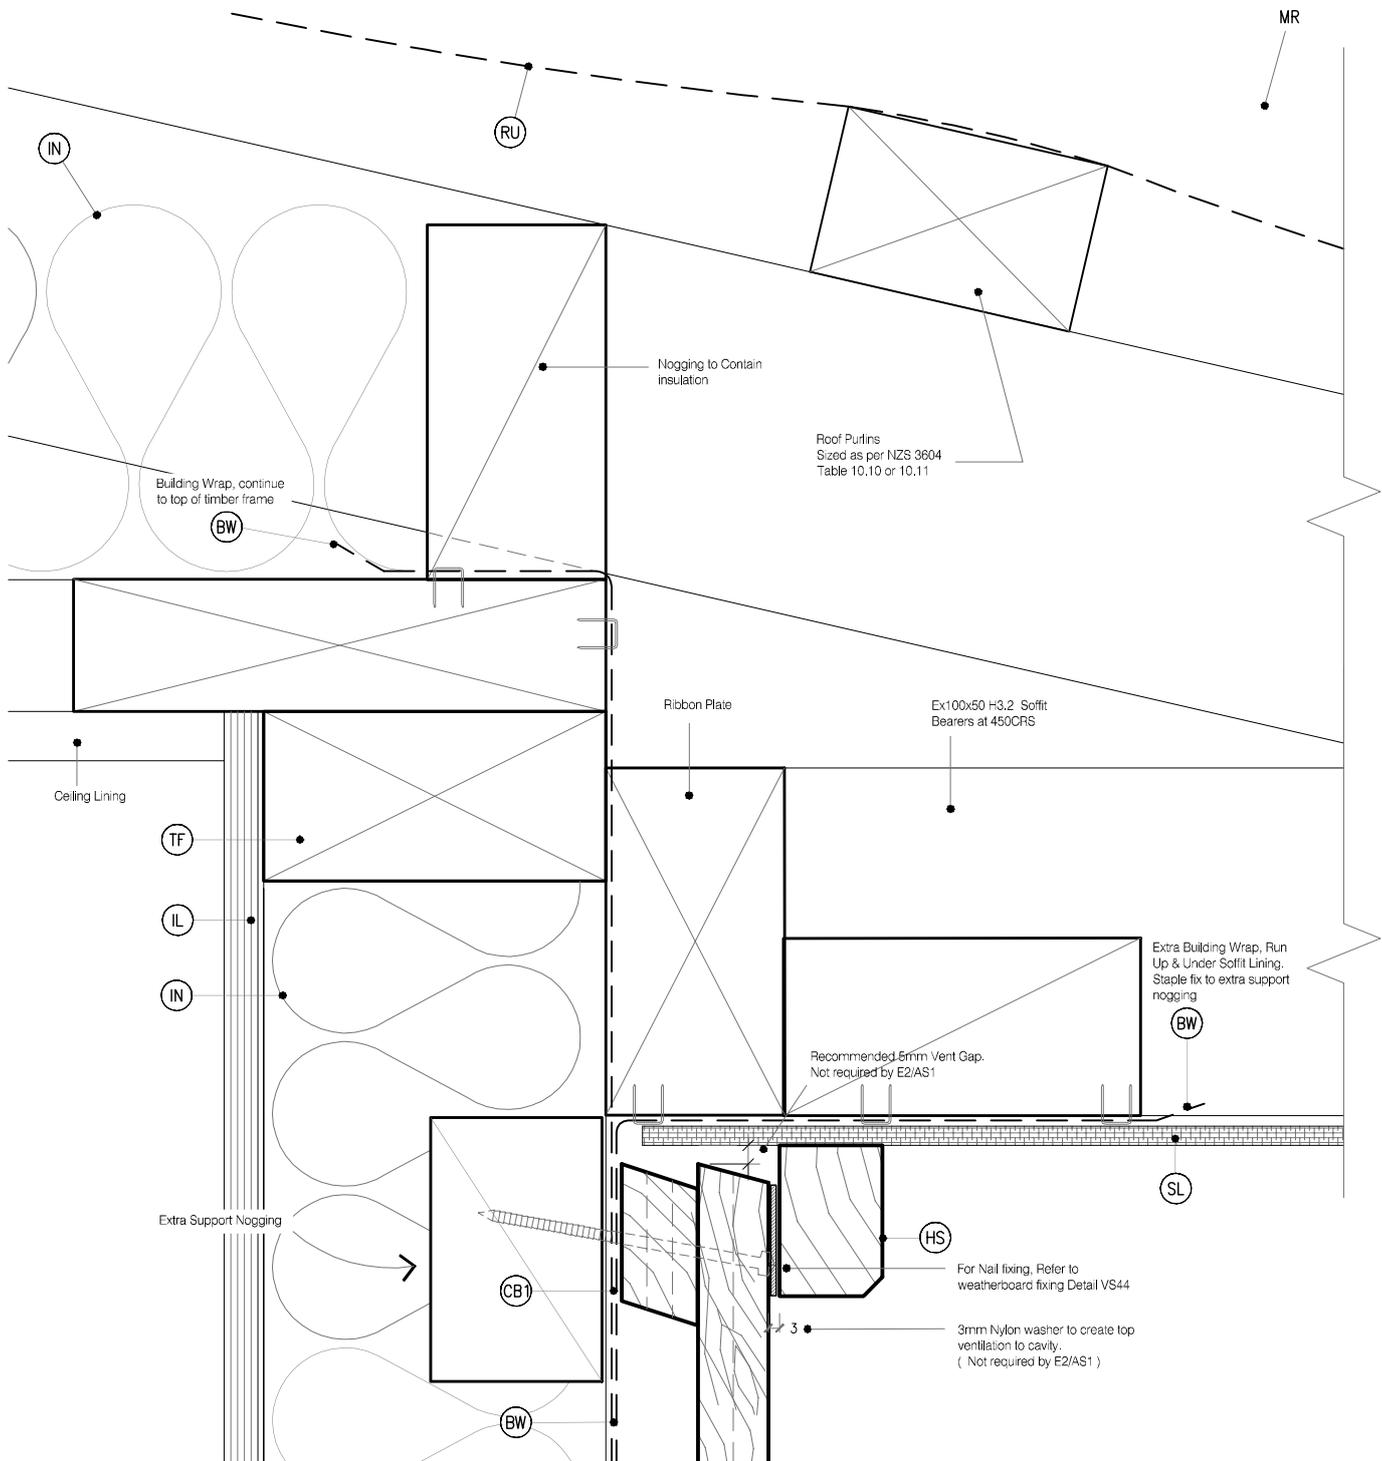

LEGEND:


- | | | |
|---|--|---|
| <p>(AF) APRON FLASHING: Materials as per E2/AS1 4.0, Coating to match roofing material or refer E2/AS1 Table 21, Flashing Cover 130mm min. (L,M & H $\geq 10^\circ$) All others 200mm Refer Table 7 E2/AS1</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> | <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity, Standard H3.1 or castellated H3.2</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(HS) HEAD SOFFIT SCRIBER: Southern Pine Eaves Mould EM40x27, Fix with 75 x 3.15mm 316 S.S nail in 2.5mm predrilled hole</p> | <p>(MR) METAL ROOFING : Selected Metal Roofing</p> <p>(SL) SOFFIT LINING: Selected Soffit Lining</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(TP) TIMBER PACKER: H3.2 treated at 300crs to allow ventilation over the top of the wall.</p> <p>(RU) ROOFING UNDERLAY: Selected Roofing Underlay As Per AS/AZS4200 with Mesh or Self Supported</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> |
|---|--|---|

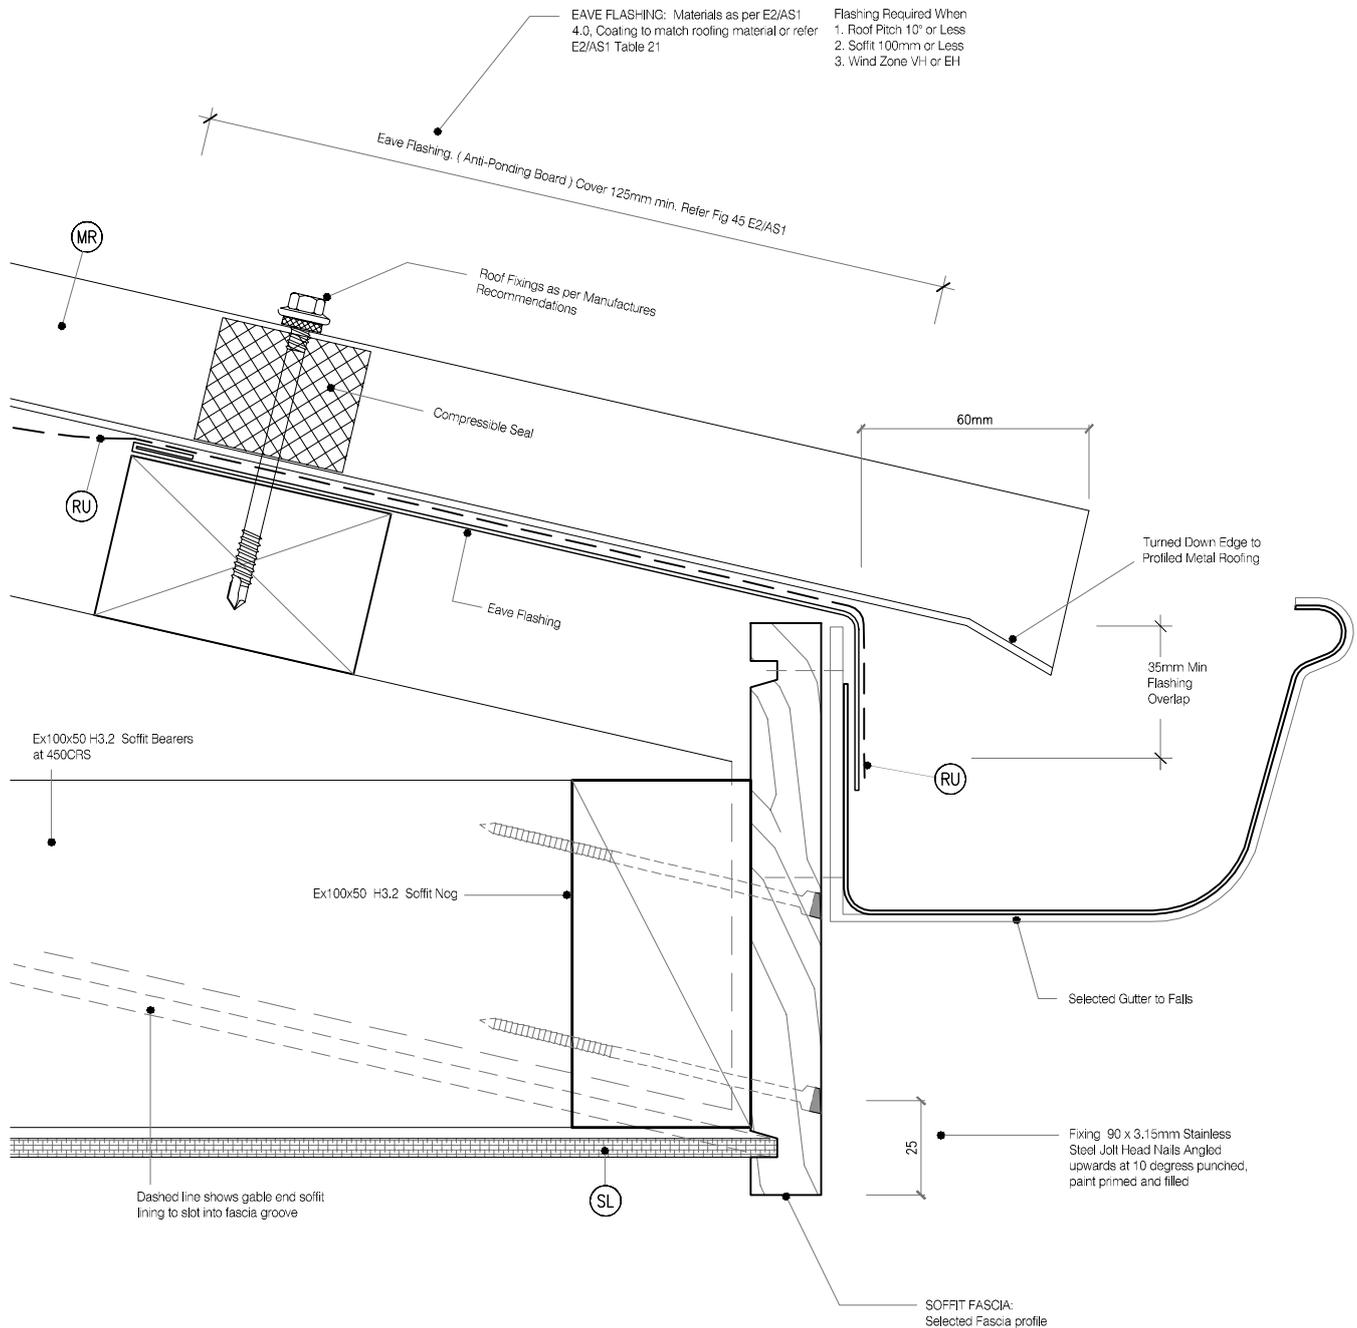

LEGEND:


- | | | |
|---|--|---|
| <p>(AF) APRON FLASHING: Materials as per E2/AS1 4.0, Coating to match roofing material or refer E2/AS1 Table 21. Flashing Cover 130mm min. (L,M & H $\geq 10^\circ$) All others 200mm Refer Table 7 E2/AS1</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> | <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(HS) HEAD SOFFIT SCRIBER: Southern Pine Eaves Mould EM40x27. Fix with 75 x 3.15mm 316 S.S nail in 2.5mm predrilled hole</p> | <p>(MR) METAL ROOFING : Selected Metal Roofing</p> <p>(SL) SOFFIT LINING: Selected Soffit Lining</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(TP) TIMBER PACKER: H3.2 treated at 300crs to allow ventilation over the top of the wall.</p> <p>(RU) ROOFING UNDERLAY: Selected Roofing Underlay As Per AS/AZS4200 with Mesh or Self Supported</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> |
|---|--|---|

APRON FLASHING ROOF TO WALL JUNCTION

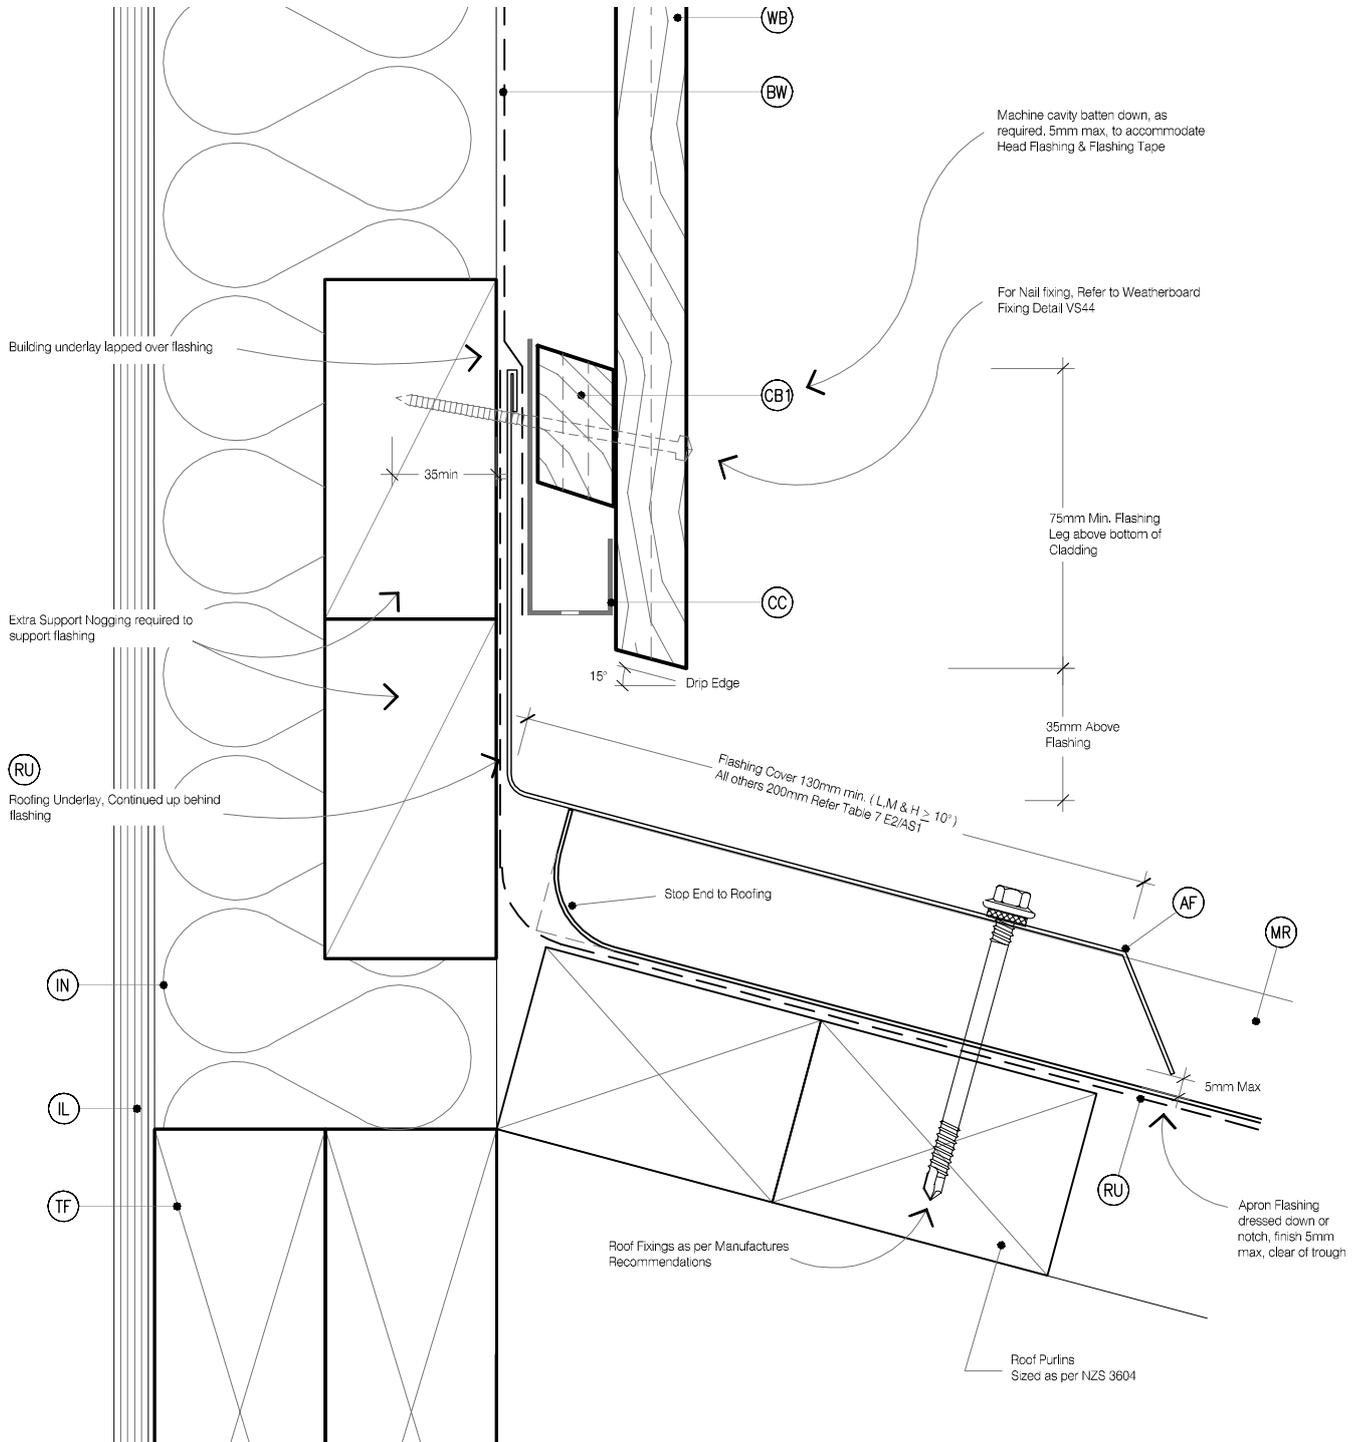

LEGEND:


- | | | |
|---|---|---|
| <p>(AF) APRON FLASHING: Materials as per E2/AS1 4.0, Coating to match roofing material or refer E2/AS1 Table 21. Flashing Cover 130mm min. (L,M & H $\geq 10^\circ$) All others 200mm Refer Table 7 E2/AS1</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> | <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(HS) HEAD SOFFIT SCRIBER: Southern Pine Eaves Mould EM40x27. Fix with 75 x 3.15mm 316 S.S nail in 2.5mm predrilled hole</p> | <p>(MR) METAL ROOFING : Selected Metal Roofing</p> <p>(SL) SOFFIT LINING: Selected Soffit Lining</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(TP) TIMBER PACKER: H3.2 treated at 300crs to allow ventilation over the top of the wall.</p> <p>(RU) ROOFING UNDERLAY: Selected Roofing Underlay As Per AS/AZS4200 with Mesh or Self Supported</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> |
|---|---|---|

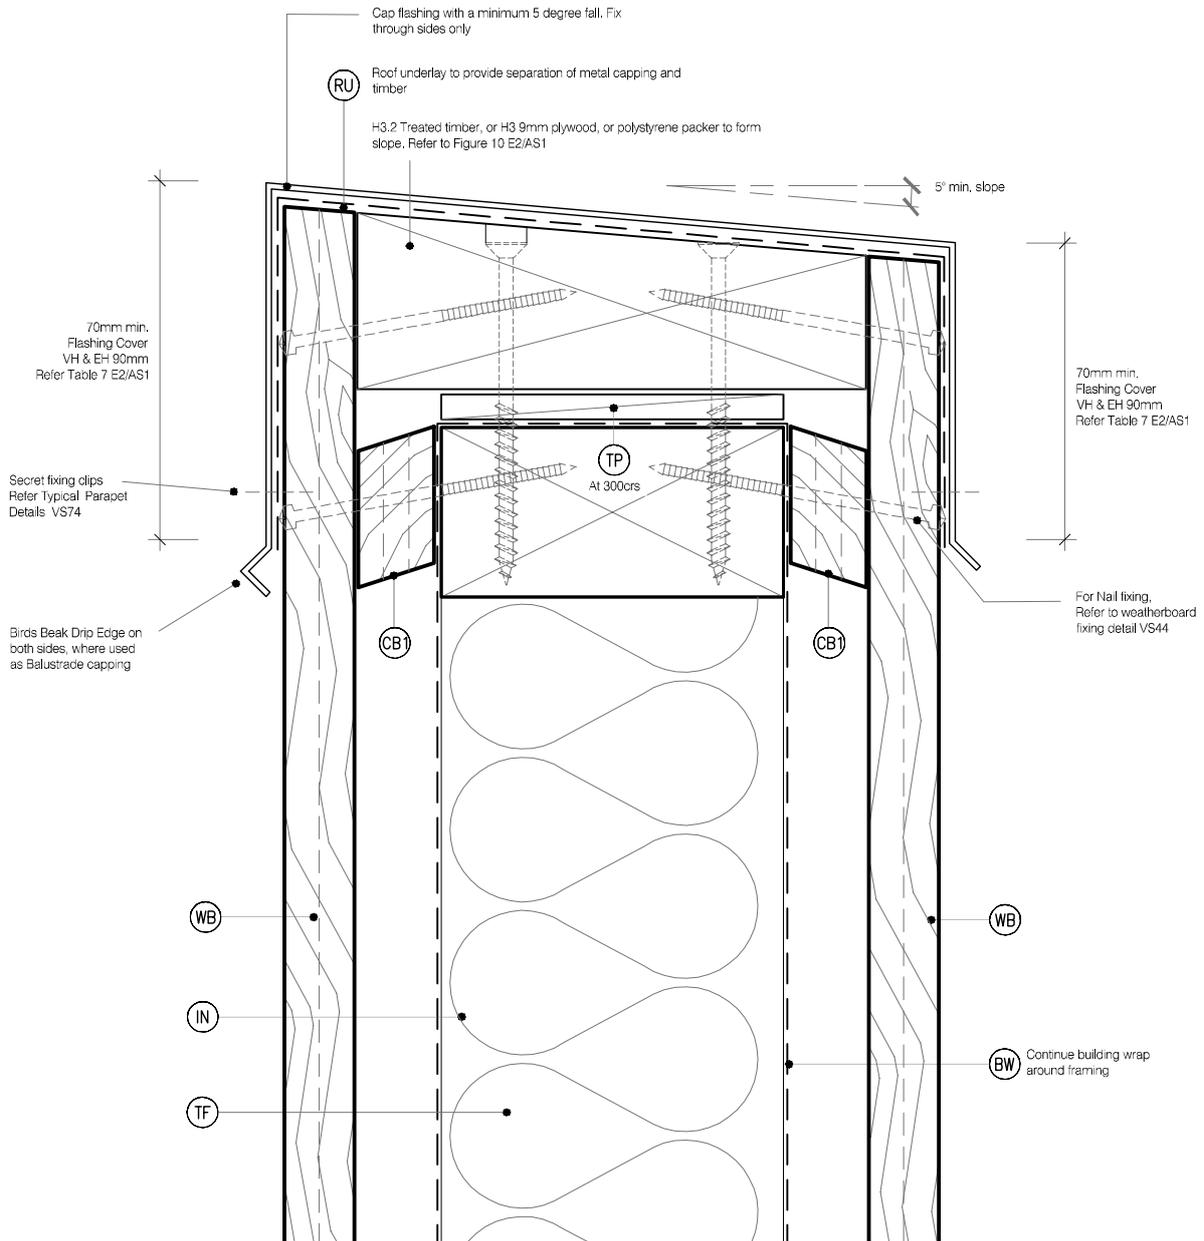

LEGEND:

- | | | |
|--|--|---|
| <p>(AF) APRON FLASHING: Materials as per E2/AS1 4.0, Coating to match roofing material or refer E2/AS1 Table 21. Flashing Cover 130mm min. (L, M & H $\geq 10^\circ$) All others 200mm Refer Table 7 E2/AS1</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> | <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(HS) HEAD SOFFIT SCRIBER: Southern Pine Eaves Mould EM40x27. Fix with 75 x 3.15mm 316 S.S nail in 2.5mm predrilled hole</p> | <p>(MR) METAL ROOFING : Selected Metal Roofing</p> <p>(SL) SOFFIT LINING: Selected Soffit Lining</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(TP) TIMBER PACKER: H3.2 treated at 300crs to allow ventilation over the top of the wall.</p> <p>(RU) ROOFING UNDERLAY: Selected Roofing Underlay As Per AS/AZS4200 with Mesh or Self Supported</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> |
|--|--|---|

BASE OF WALL MEMBRANE ROOF

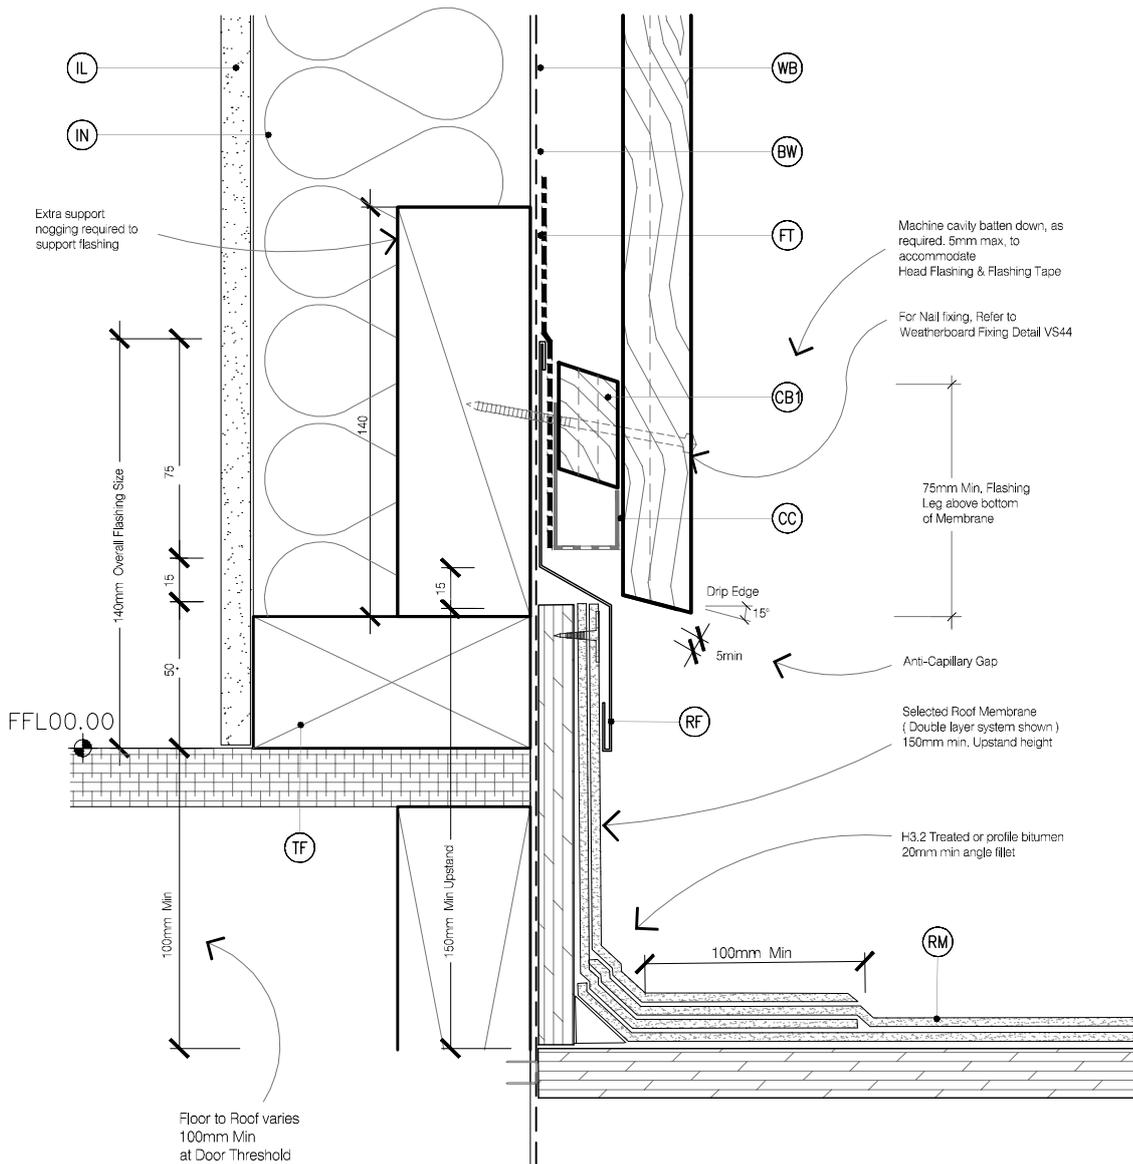

LEGEND:



PARAPET SADDLE FLASHING: Materials as per E2/AS1 4.0, refer E2/AS1 Figure 11 & 12. Typically 0.45mm Min 316 Stainless Steel. Refer Table 20 & Table 21 for Comparability of Materials in Contact



BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Ridgid Underlay required (9.1.7.2 E2/AS1)



CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding



CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL: 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity



CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2



CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED: 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity



FLASHING TAPE: As per E2/AS1 4.3.11



CAP FLASHING: Continuous parapet flashing. Materials as per E2/AS1 4.3 + Figure 9 & Table 7



INTERNAL LINING: Selected Internal Lining



ROOFING MEMBRANE: Selected System on 17mm CCA treated H3.2 grade plywood glued and screwed to Rafters. Roof Membrane requires 400mm solid block support each way & solid support to all sheet edges



INSULATION: Selected Insulation



PLYWOOD BACKING: 17mm CCA treated H3.2 grade plywood substrate




ROOF FLASHING: Materials as per E2/AS1 4.3



WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617



TIMBER FRAME: H1.2 min treated timber framing

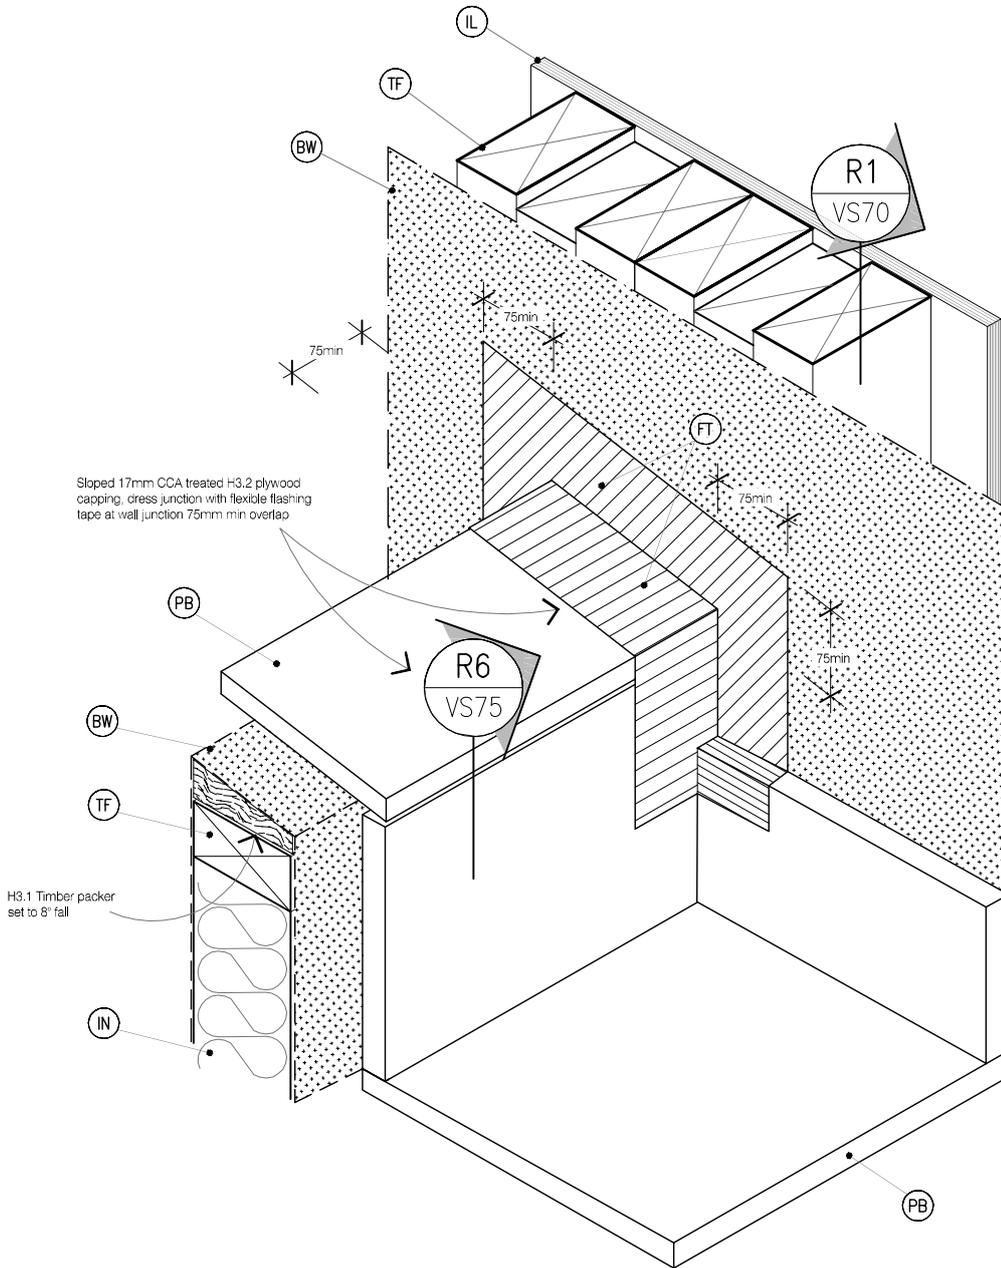


STAGE ONE

LEGEND:

- | | | |
|---|---|---|
| <p>(PSF) PARAPET SADDLE FLASHING: Materials as per E2/AS1 4.0, refer E2/AS1 Figure 11 & 12. Typically 0.45mm Min 316 Stainless Steel. Refer Table 20 & Table 21 for Comparability of Materials in Contact</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> | <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(FT) FLASHING TAPE: As per E2/AS1 4.3.11</p> <p>(CF) CAP FLASHING: Continuous parapet flashing. Materials as per E2/AS1 4.3 + Figure 9 & Table 7</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> | <p>(RM) ROOFING MEMBRANE: Selected System on 17mm CCA treated H3.2 grade plywood glued and screwed to Rafters. Roof Membrane requires 400mm solid block support each way & solid support to all sheet edges</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(PB) PLYWOOD BACKING: 17mm CCA treated H3.2 grade plywood substrate</p> <p>(RF) ROOF FLASHING: Materials as per E2/AS1 4.3</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> |
|---|---|---|

DECK TO ROOF MEMBRANE SADDLE FLASHING STAGE TWO

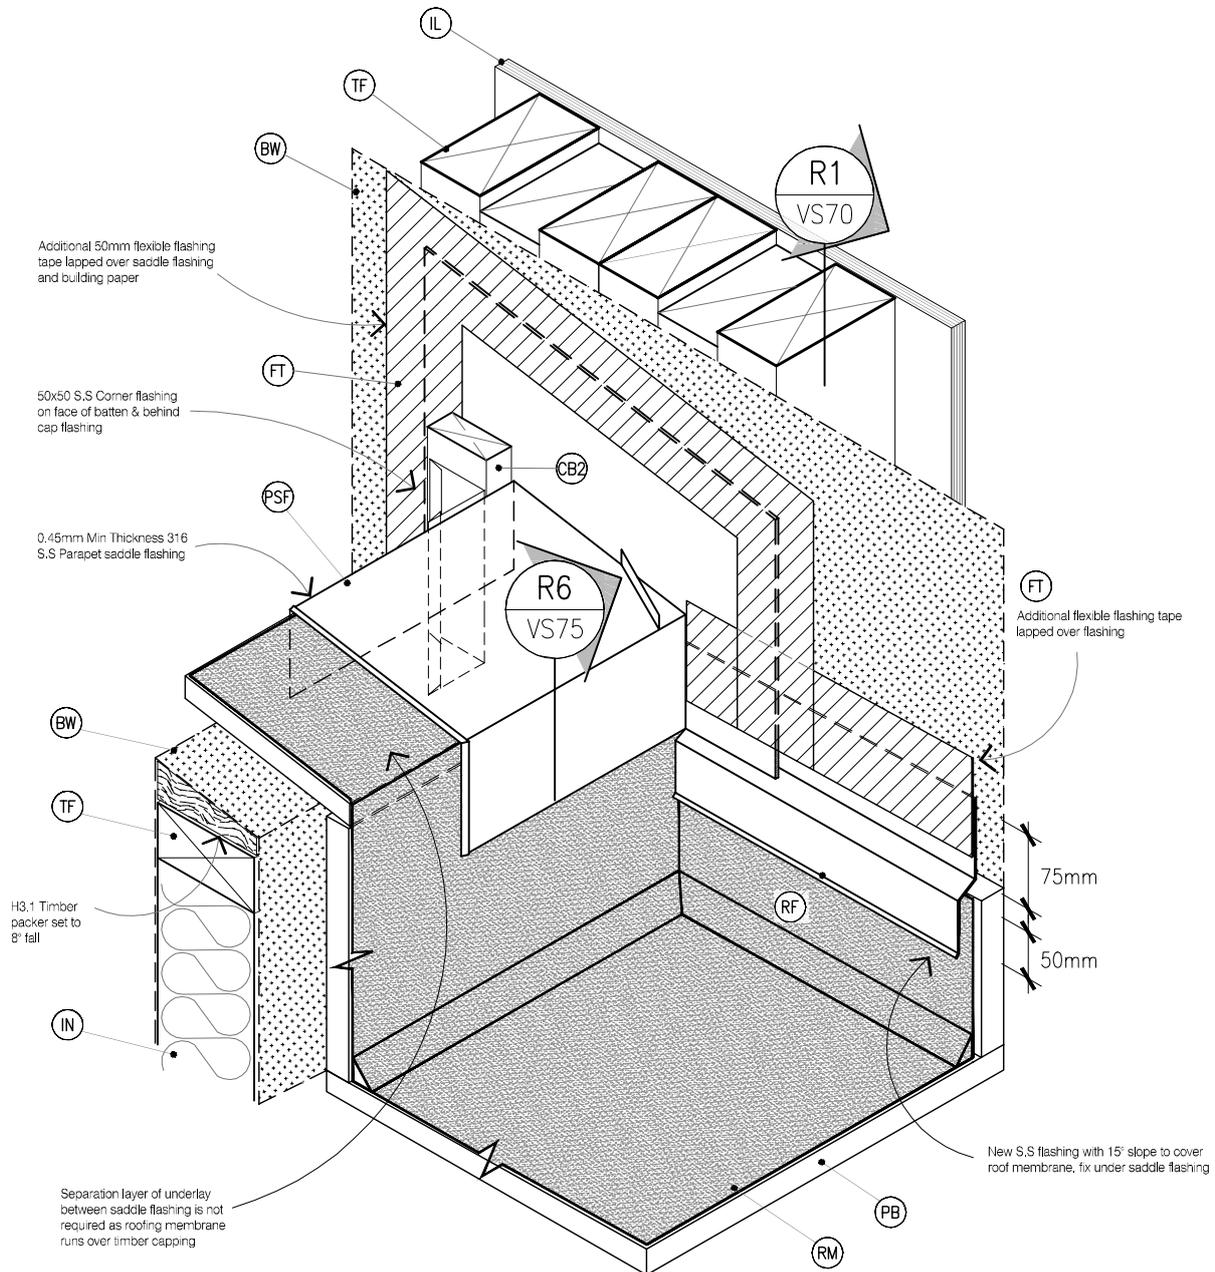

STAGE TWO

LEGEND:



PARAPET SADDLE FLASHING: Materials as per E2/AS1 4.0, refer E2/AS1 Figure 11 & 12. Typically 0.45mm Min 316 Stainless Steel. Refer Table 20 & Table 21 for Comparability of Materials in Contact



BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)



CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding



CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL: 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity



CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2



CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED: 45mm x 45mm SP Radiata Pine, H3.2
70mm x 45mm SP Radiata Pine, H3.2
Castellated with a 18 degree bevelled slope. To form a 45mm cavity



FLASHING TAPE: As per E2/AS1 4.3.11



CAP FLASHING: Continuous parapet flashing. Materials as per E2/AS1 4.3 + Figure 9 & Table 7



INTERNAL LINING: Selected Internal Lining



ROOFING MEMBRANE: Selected System on 17mm CCA treated H3.2 grade plywood glued and screwed to Rafters. Roof Membrane requires 400mm solid block support each way & solid support to all sheet edges



INSULATION: Selected Insulation



PLYWOOD BACKING: 17mm CCA treated H3.2 grade plywood substrate




ROOF FLASHING: Materials as per E2/AS1 4.3



WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617



TIMBER FRAME: H1.2 min treated timber framing



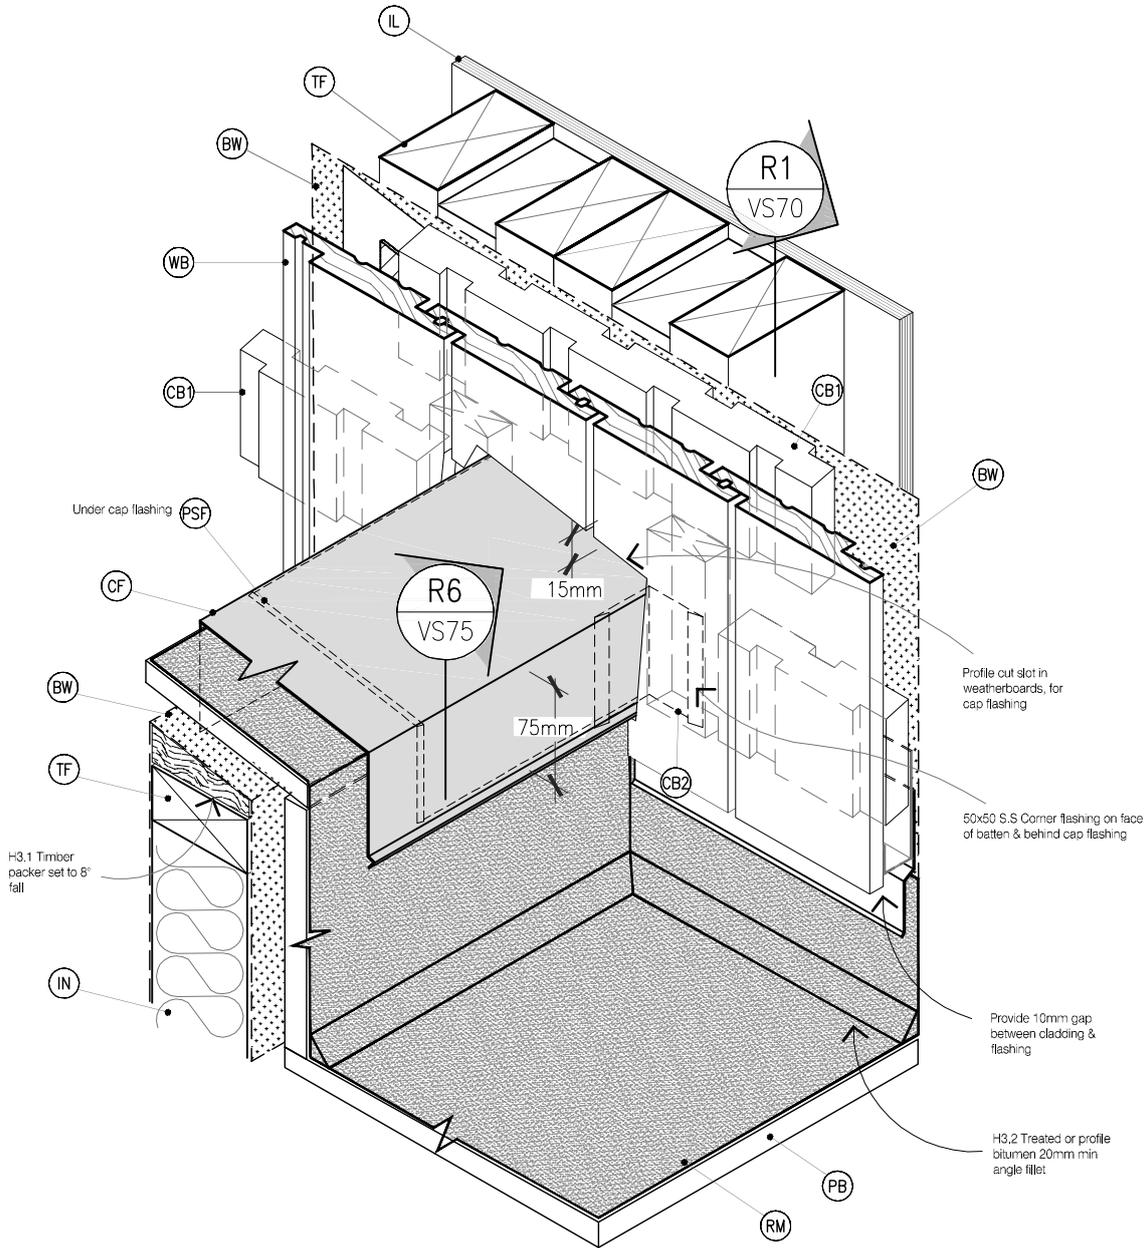


STAGE THREE

LEGEND:

- | | | |
|---|---|---|
| <p>(PSF) PARAPET SADDLE FLASHING: Materials as per E2/AS1 4.0, refer E2/AS1 Figure 11 & 12. Typically 0.45mm Min 316 Stainless Steel. Refer Table 20 & Table 21 for Comparability of Materials in Contact</p> <p>(WB) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> | <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2
70mm x 45mm SP Radiata Pine, H3.2
Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(FT) FLASHING TAPE: As per E2/AS1 4.3.11</p> <p>(CF) CAP FLASHING: Continuous parapet flashing. Materials as per E2/AS1 4.3 + Figure 9 & Table 7</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> | <p>(RM) ROOFING MEMBRANE: Selected System on 17mm CCA treated H3.2 grade plywood glued and screwed to Rafters. Roof Membrane requires 400mm solid block support each way & solid support to all sheet edges</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(PB) PLYWOOD BACKING: 17mm CCA treated H3.2 grade plywood substrate</p> <p>(RF) ROOF FLASHING: Materials as per E2/AS1 4.3</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> |
|---|---|---|


TYPICAL PARAPET CAPPING JOINT DETAILS

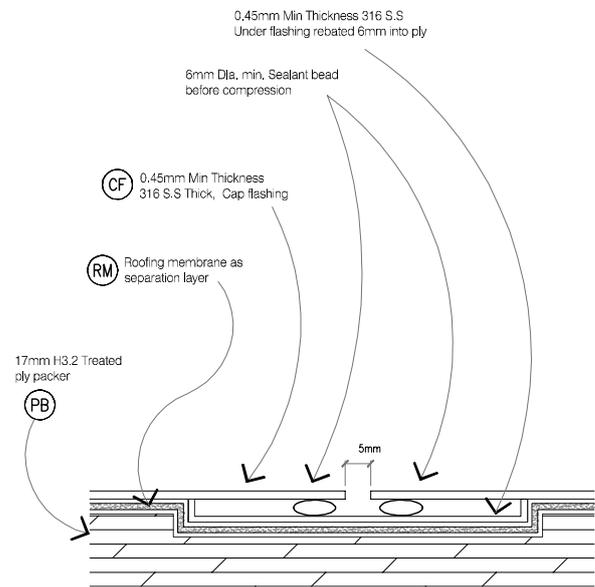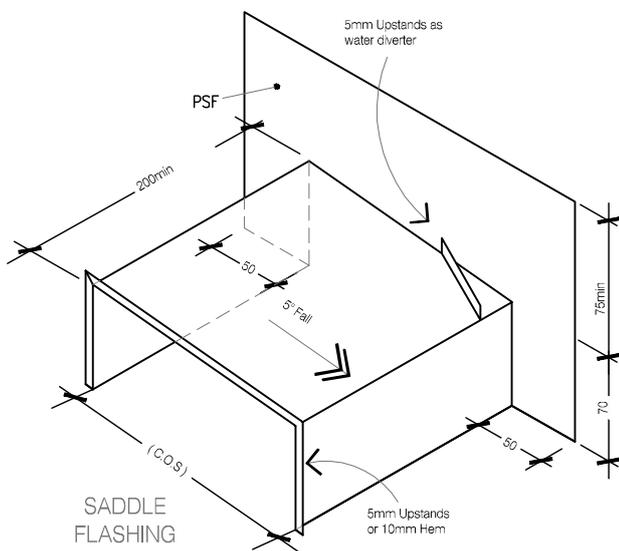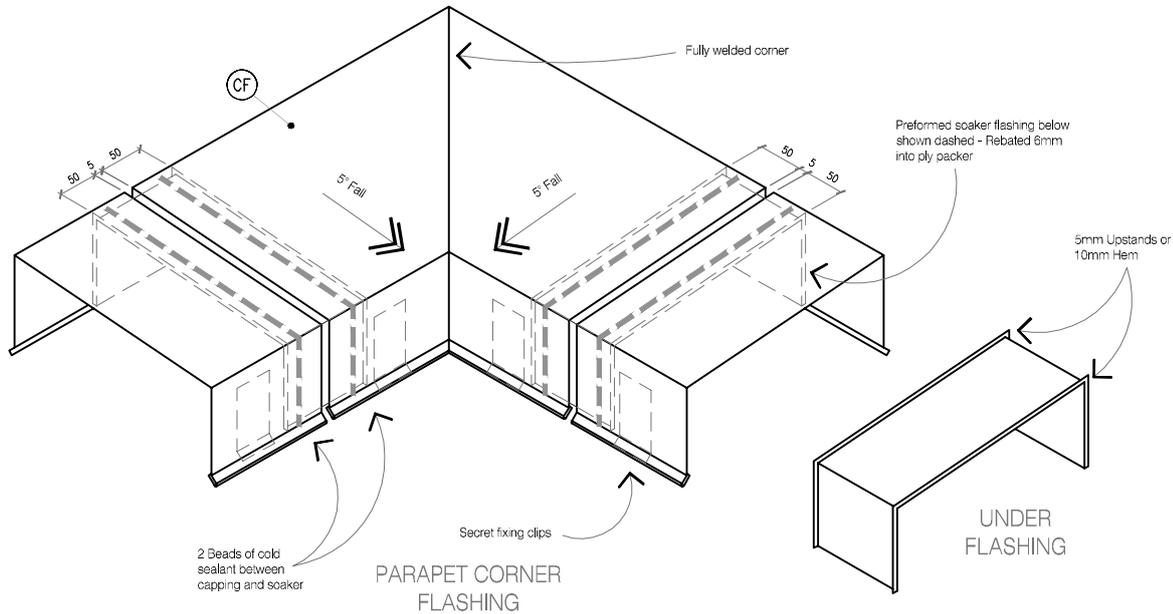

LEGEND:

- | | |
|---|---|
| <p>(PSF) PARAPET SADDLE FLASHING: Materials as per E2/AS1 4.0, refer E2/AS1 Figure 11 & 12. Typically 0.45mm Min 316 Stainless Steel. Refer Table 20 & Table 21 for Comparability of Materials in Contact</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> | <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(FT) FLASHING TAPE: As per E2/AS1 4.3.11</p> <p>(CF) CAP FLASHING: Continuous parapet flashing. Materials as per E2/AS1 4.3 + Figure 9 & Table 7</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> |
|---|---|


- | |
|---|
| <p>(RM) ROOFING MEMBRANE: Selected System on 17mm CCA treated H3.2 grade plywood glued and screwed to Rafters. Roof Membrane requires 400mm solid block support each way & solid support to all sheet edges</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(PB) PLYWOOD BACKING: 17mm CCA treated H3.2 grade plywood substrate</p> <p>(RF) ROOF FLASHING: Materials as per E2/AS1 4.3</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> |
|---|

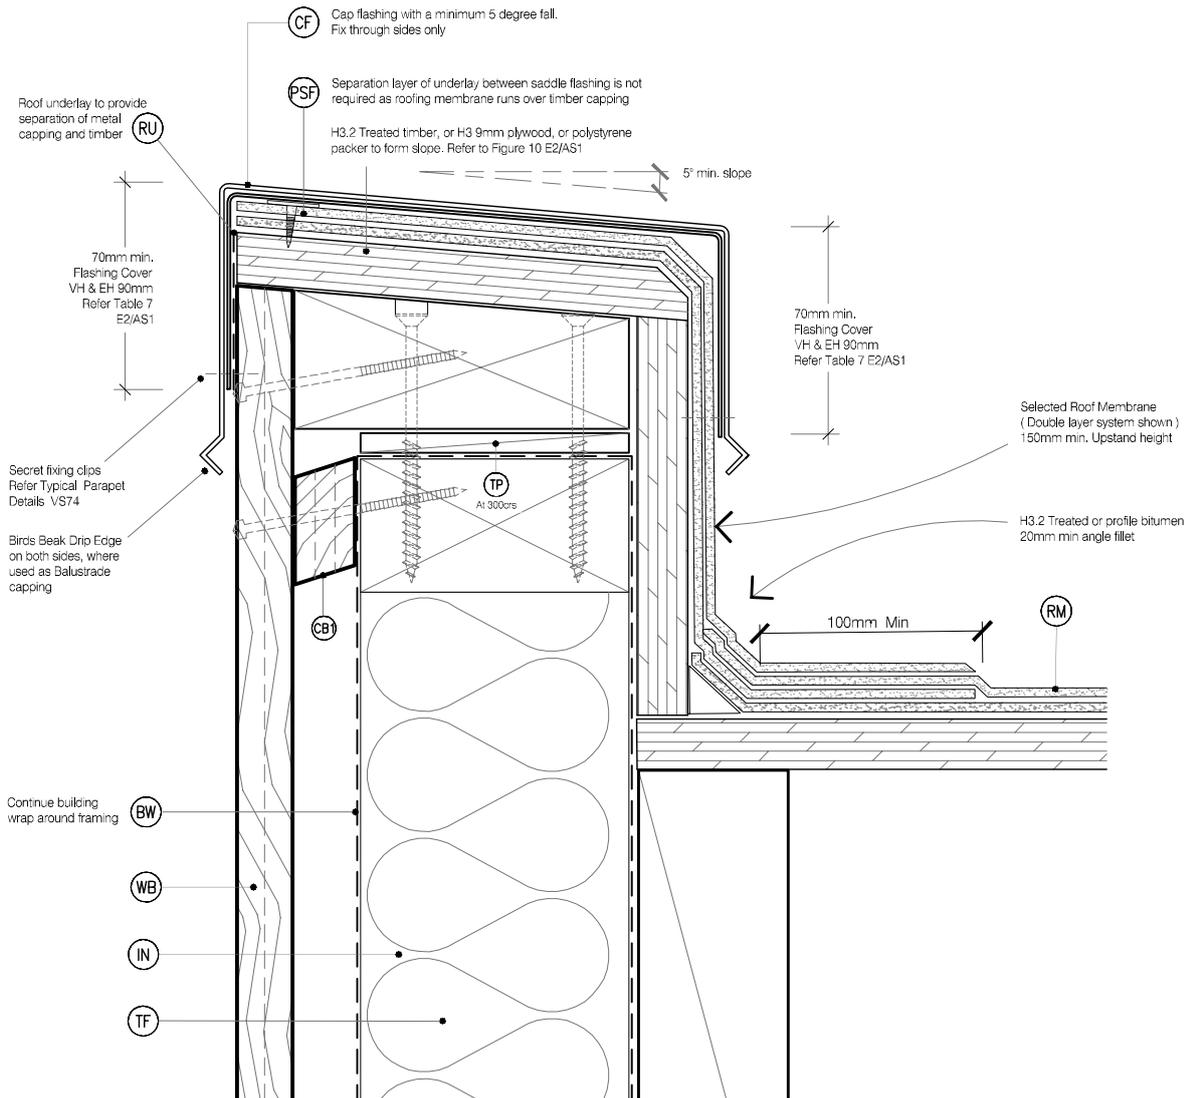

LEGEND:


- | | | |
|---|---|---|
| <p>(PSF) PARAPET SADDLE FLASHING: Materials as per E2/AS1 4.0, refer E2/AS1 Figure 11 & 12. Typically 0.45mm Min 316 Stainless Steel. Refer Table 20 & Table 21 for Comparability of Materials in Contact</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> | <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(FT) FLASHING TAPE: As per E2/AS1 4.3.11</p> <p>(CF) CAP FLASHING: Continuous parapet flashing. Materials as per E2/AS1 4.3 + Figure 9 & Table 7</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> | <p>(RM) ROOFING MEMBRANE: Selected System on 17mm CCA treated H3.2 grade plywood glued and screwed to Rafters. Roof Membrane requires 400mm solid block support each way & solid support to all sheet edges</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(PB) PLYWOOD BACKING: 17mm CCA treated H3.2 grade plywood substrate</p> <p>(RF) ROOF FLASHING: Materials as per E2/AS1 4.3</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> |
|---|---|---|

HALF WALL SILL WEATHERBOARD TO BRICK

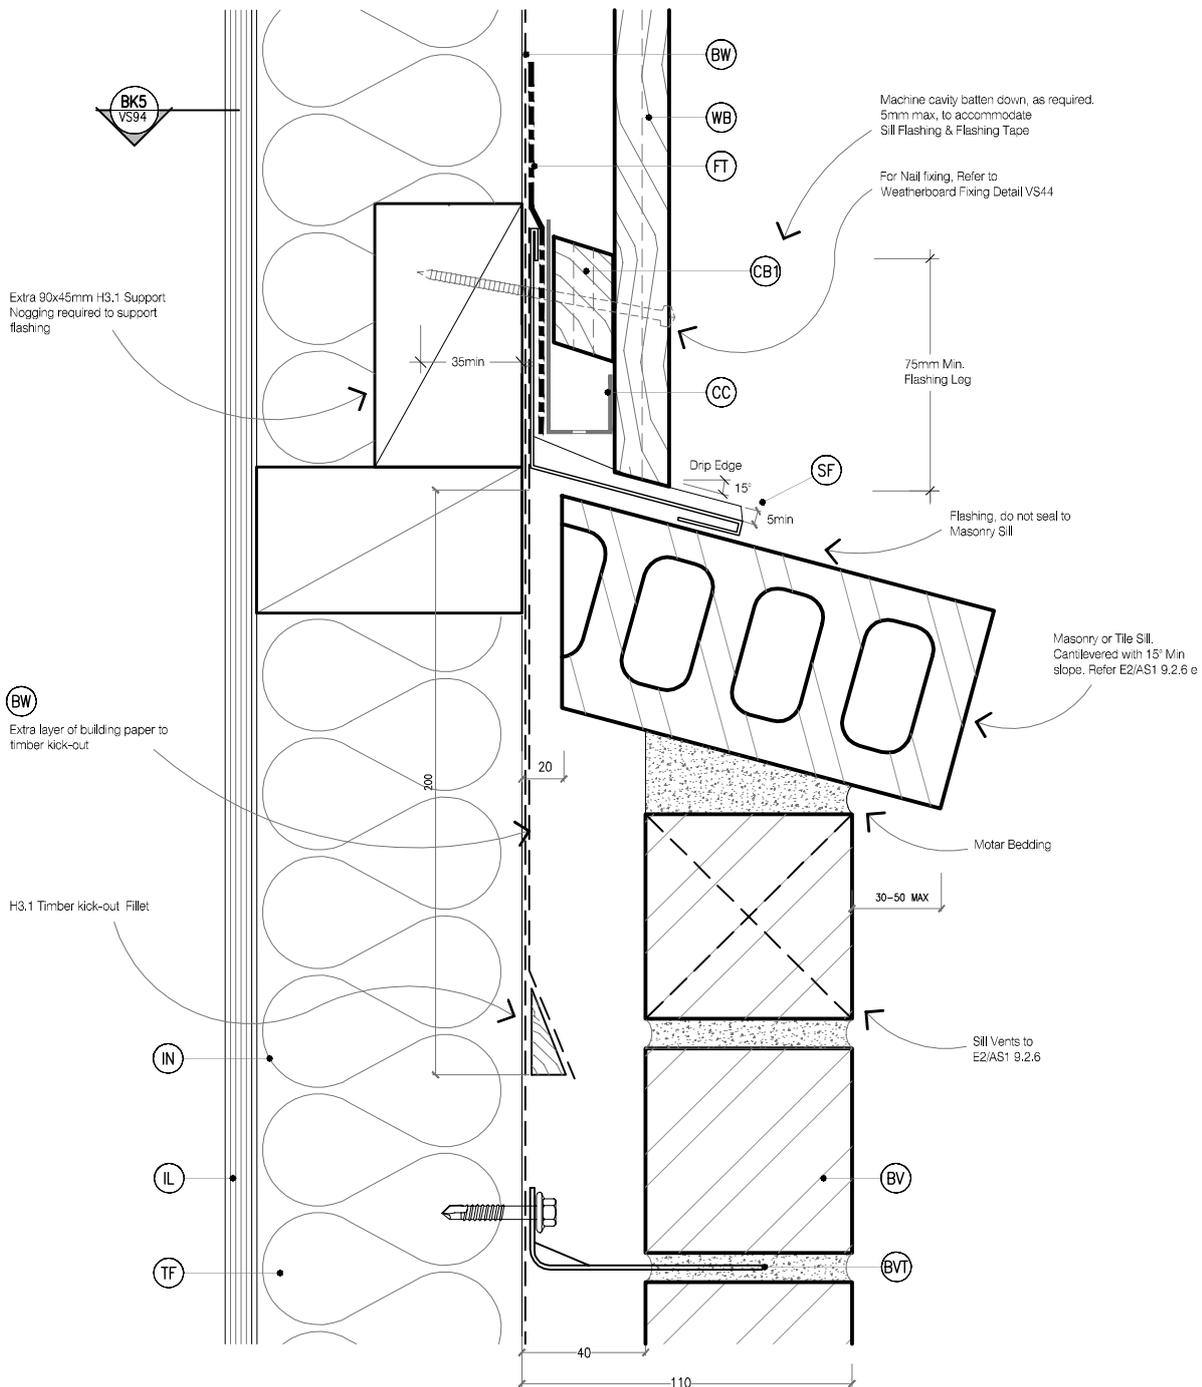


LEGEND:

- (SF)** SILL FLASHING: Continuous flashing on 15° min slope with turn back ends at end of walls. Materials as per E2/AS1 4.0 Typically 0.45mm Min 316 Stainless Steel.
- (BW)** BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)
- (BV)** BRICK VENEER: Selected brick veneer. Typically 70 series clay brick veneer on 40mm cavity
- (FT)** FLASHING TAPE: As per E2/AS1 4.3.11
- (BVT)** BRICK VENEER TIES: Stainless Steel brick Veneer ties screw fixed to framing - spacing NZS4210, ties to be within 300mm of internal or external corner
- (CB1)** CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SPP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity
- (CB2)** CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2
- (CB3)** CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity
- (CC)** CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding
- (CF)** CORNER FLASHING: 316 Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3. 75x75 Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges
- (IL)** INTERNAL LINING: Selected Internal Lining
- (IN)** INSULATION: Selected Insulation
- (TF)** TIMBER FRAME: H1.2 min treated timber framing
- (WB)** WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617
- (FF)** FLAT FLASHING: 316 Stainless Steel 100mm Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150mm Hem or Hook to Flashing Edges

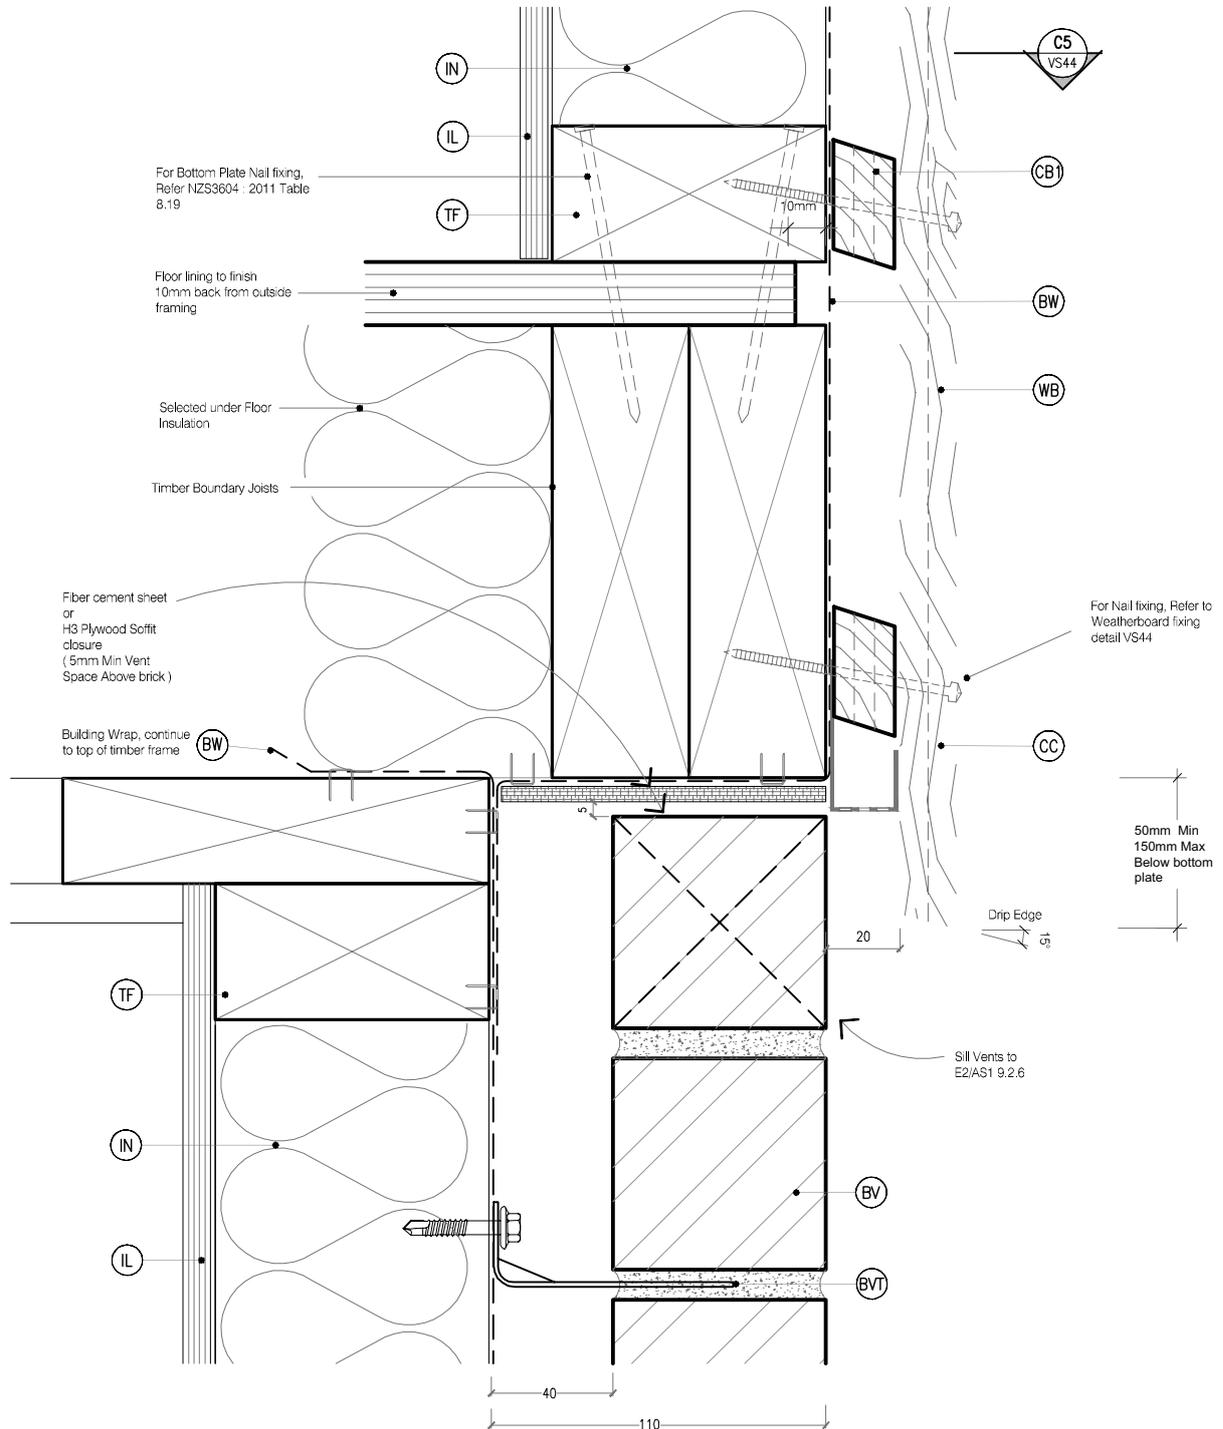

LEGEND:

- | | | |
|---|--|--|
| <p>(SF) SILL FLASHING: Continuous flashing on 15° min slope with turn back ends at end of walls. Materials as per E2/AS1 4.0 Typically 0.45mm Min 316 Stainless Steel.</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(BV) BRICK VENEER: Selected brick veneer. Typically 70 series clay brick veneer on 40mm cavity</p> <p>(FT) FLASHING TAPE: As per E2/AS1 4.3.11</p> <p>(BVT) BRICK VENEER TIES: Stainless Steel brick Veneer ties screw fixed to framing - spacing NZS4210, ties to be within 300mm of internal or external corner</p> | <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL: 20mm x 45mm SPP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2</p> <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED: 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> | <p>(CF) CORNER FLASHING: 316 Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3. 75x75 Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(WB) WEATHERBOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> <p>(FF) FLAT FLASHING: 316 Stainless Steel 100mm Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150mm Hem or Hook to Flashing Edges</p> |
|---|--|--|

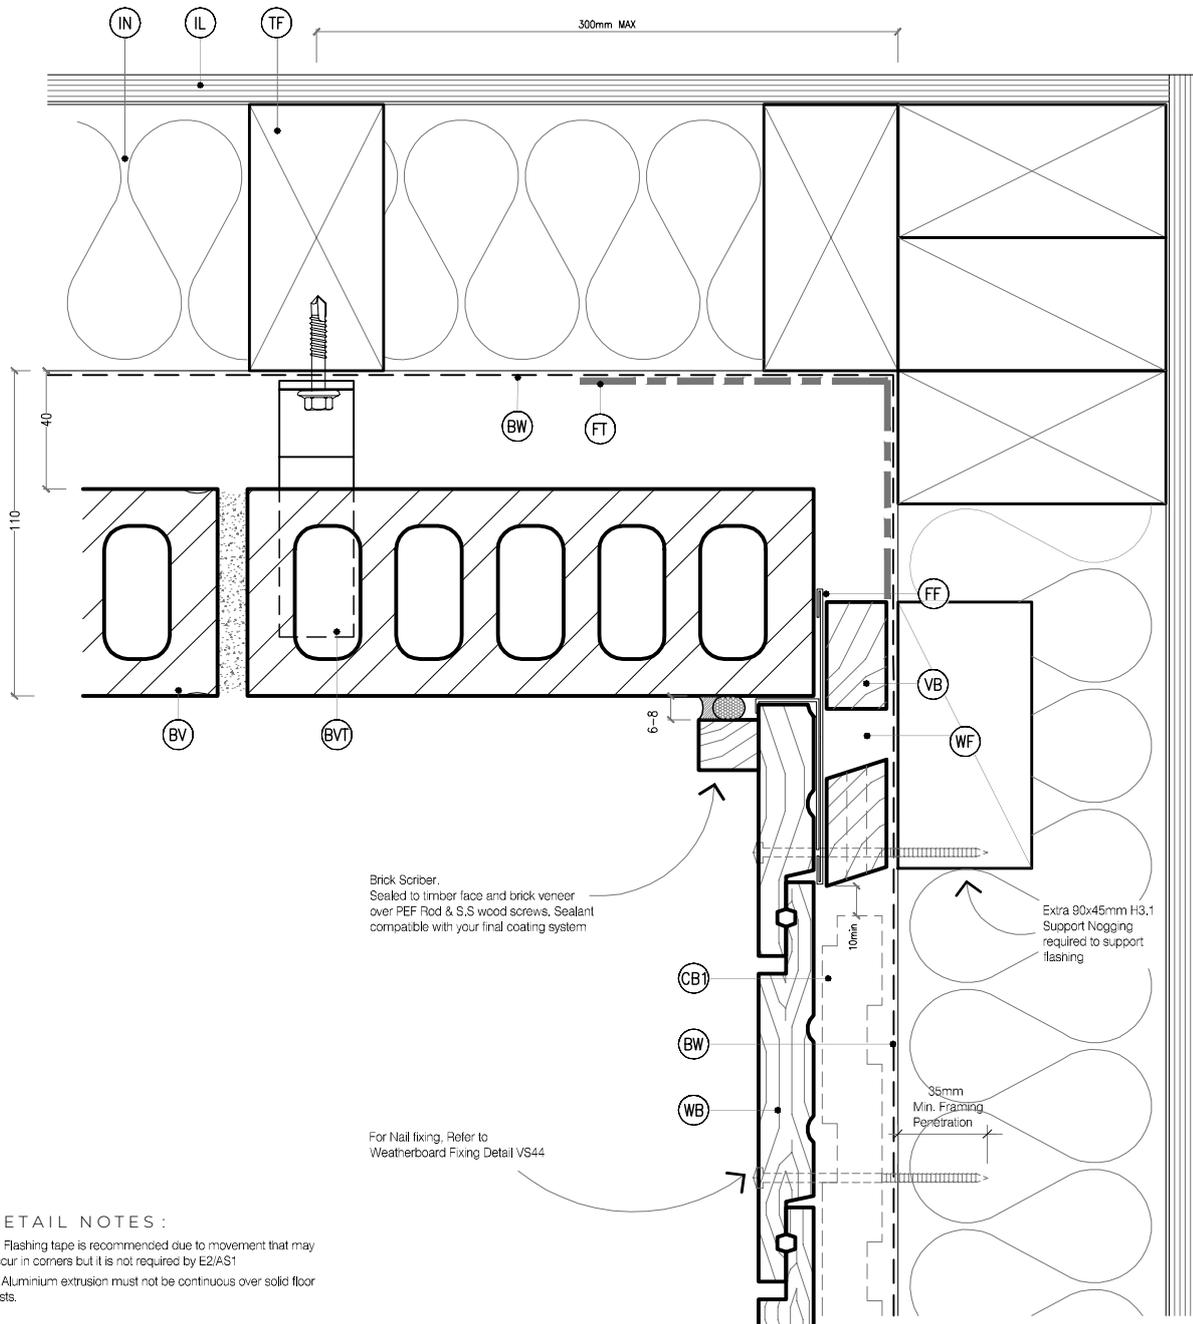


DETAIL NOTES :

1. Flashing tape is recommended due to movement that may occur in corners but it is not required by E2/AS1
2. Aluminium extrusion must not be continuous over solid floor joists.

LEGEND :

- | | | |
|--|---|---|
| <p>(SF) SILL FLASHING: Continuous flashing on 15° min slope with turn back ends at end of walls. Materials as per E2/AS1 4.0 Typically 0.45mm Min 316 Stainless Steel.</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(BV) BRICK VENEER: Selected brick veneer. Typically 70 series clay brick veneer on 40mm cavity</p> <p>(FT) FLASHING TAPE: As per E2/AS1 4.3.11</p> <p>(BVT) BRICK VENEER TIES: Stainless Steel brick Veneer ties screw fixed to framing - spacing NZS4210, ties to be within 300mm of internal or external corner</p> | <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SPP Radiata Pine H3.2, Castellaed with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellaed H3.2</p> <p>(CB3) CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellaed with a 18 degree bevelled slope. To form a 45mm cavity</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> | <p>(CF) CORNER FLASHING: 316 Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3. 75x75 Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> <p>(FF) FLAT FLASHING: 316 Stainless Steel 100mm Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150mm Hem or Hook to Flashing Edges</p> |
|--|---|---|

EXTERIOR JUNCTION WEATHERBOARD TO BRICK

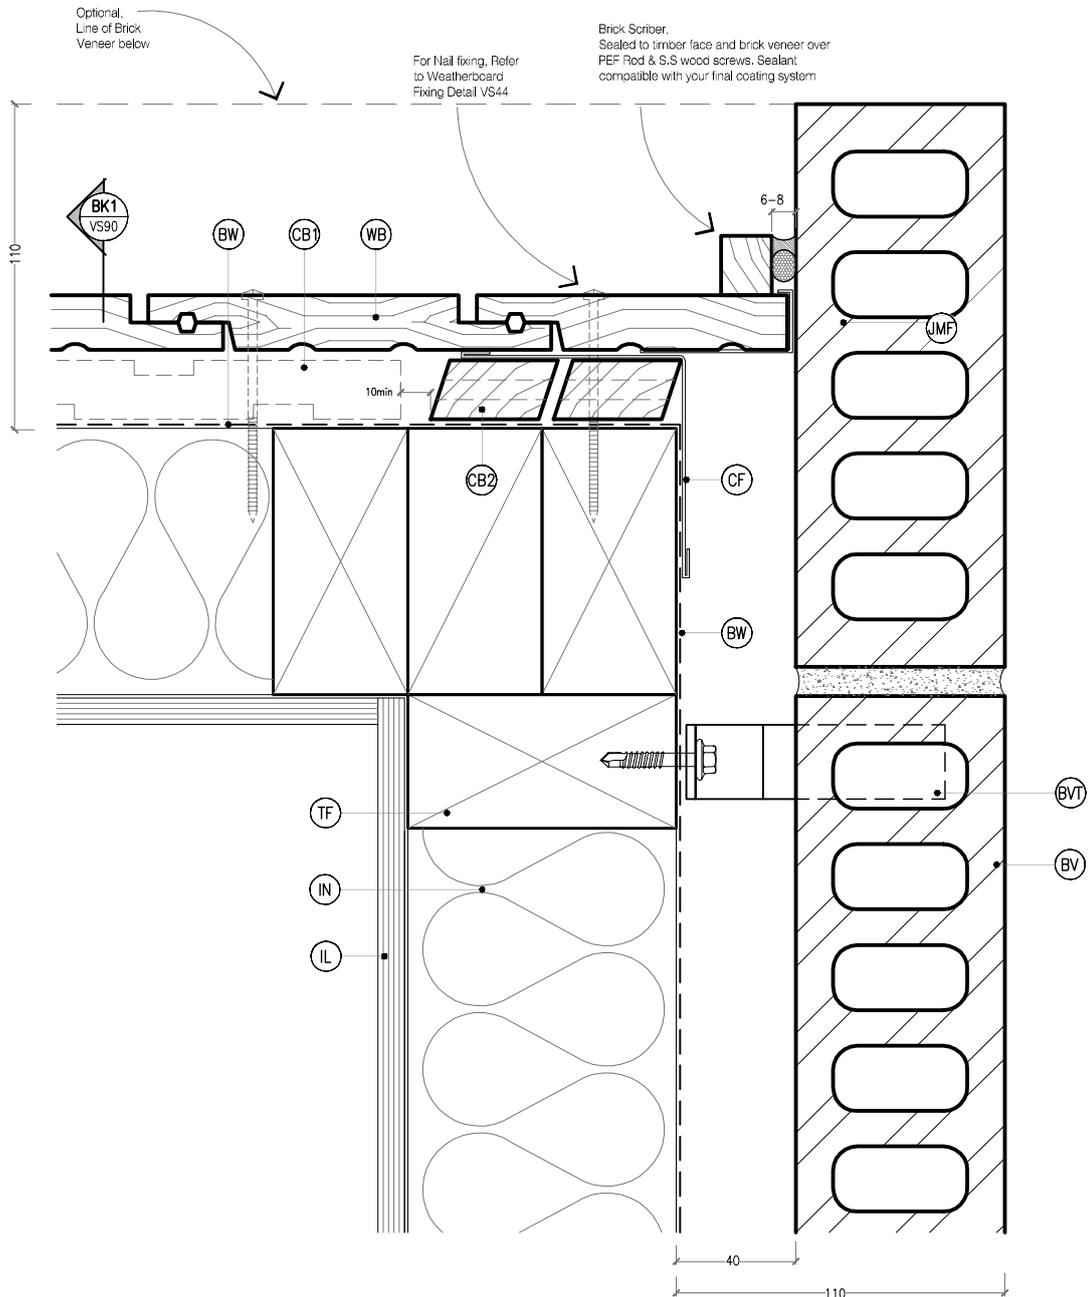

LEGEND:



SF SILL FLASHING: Continuous flashing on 15° min slope with turn back ends at end of walls. Materials as per E2/AS1 4.0 Typically 0.45mm Min 316 Stainless Steel.



BW BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23. In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)



BV BRICK VENEER: Selected brick veneer. Typically 70 series clay brick veneer on 40mm cavity



FT FLASHING TAPE: As per E2/AS1 4.3.11



BVT BRICK VENEER TIES: Stainless Steel brick Veneer ties screw fixed to framing - spacing NZS4210, ties to be within 300mm of internal or external corner



CB1 CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SPP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity



CB2 CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2



CB3 CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity



CC CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding



CF CORNER FLASHING: 316 Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3. 75x75 Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges



IL INTERNAL LINING: Selected Internal Lining



IN INSULATION: Selected Insulation



TF TIMBER FRAME: H1.2 min treated timber framing




WB WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617




FF FLAT FLASHING: 316 Stainless Steel 100mm Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150mm Hem or Hook to Flashing Edges


3D SILL FLASHING

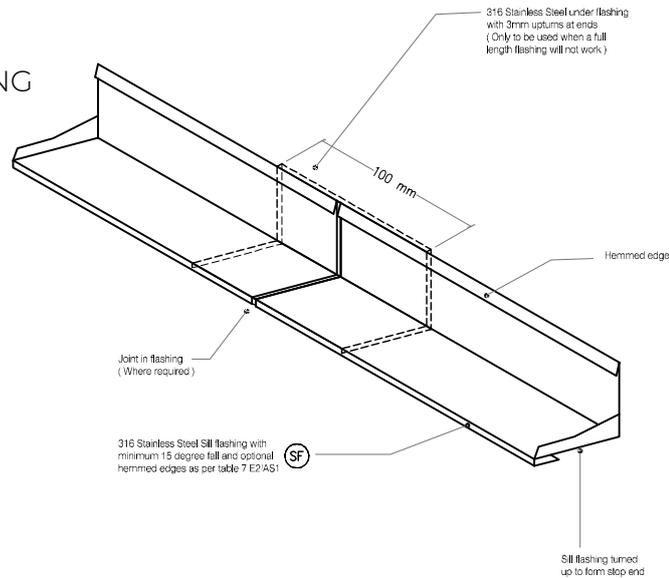


SILL FLASHING DIMENSIONS

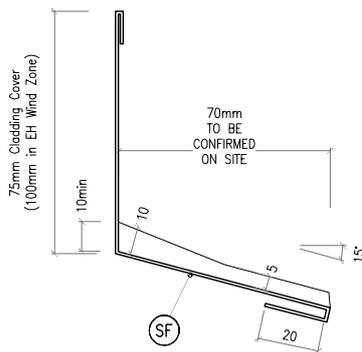

INLINE & INTERNAL FLASHING DIMENSIONS

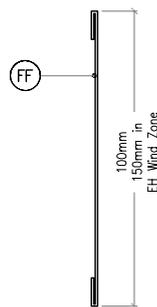

EXTERNAL FLASHING DIMENSIONS

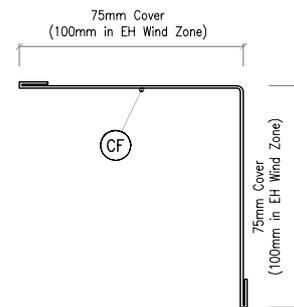

LEGEND:



SF SILL FLASHING: Continuous flashing on 15° min slope with turn back ends at end of walls. Materials as per E2/AS1 4.0 Typically 0.45mm Min 316 Stainless Steel.



BW BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)



BV BRICK VENEER: Selected brick veneer. Typically 70 series clay brick veneer on 40mm cavity



FT FLASHING TAPE: As per E2/AS1 4.3.11



BVT BRICK VENEER TIES: Stainless Steel brick Veneer ties screw fixed to framing - spacing NZS4210, ties to be within 300mm of internal or external corner



CB1 CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SPP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity



CB2 CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or castellated H3.2



CB3 CAVITY BATTEN, HORIZONTAL - STRUCTURALLY FIXED : 45mm x 45mm SP Radiata Pine, H3.2 70mm x 45mm SP Radiata Pine, H3.2 Castellated with a 18 degree bevelled slope. To form a 45mm cavity



CC CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding



CF CORNER FLASHING: 316 Stainless Steel corner flashing. Refer NZBC E2/AS1 4.3. 75x75 Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 100x100 Hem or Hook to Flashing Edges



IL INTERNAL LINING: Selected Internal Lining



IN INSULATION: Selected Insulation



TF TIMBER FRAME: H1.2 min treated timber framing




WB WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617



FF FLAT FLASHING: 316 Stainless Steel 100mm Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150mm Hem or Hook to Flashing Edges

HALF WALL SILL PLASTER PANEL TO WEATHERBOARD

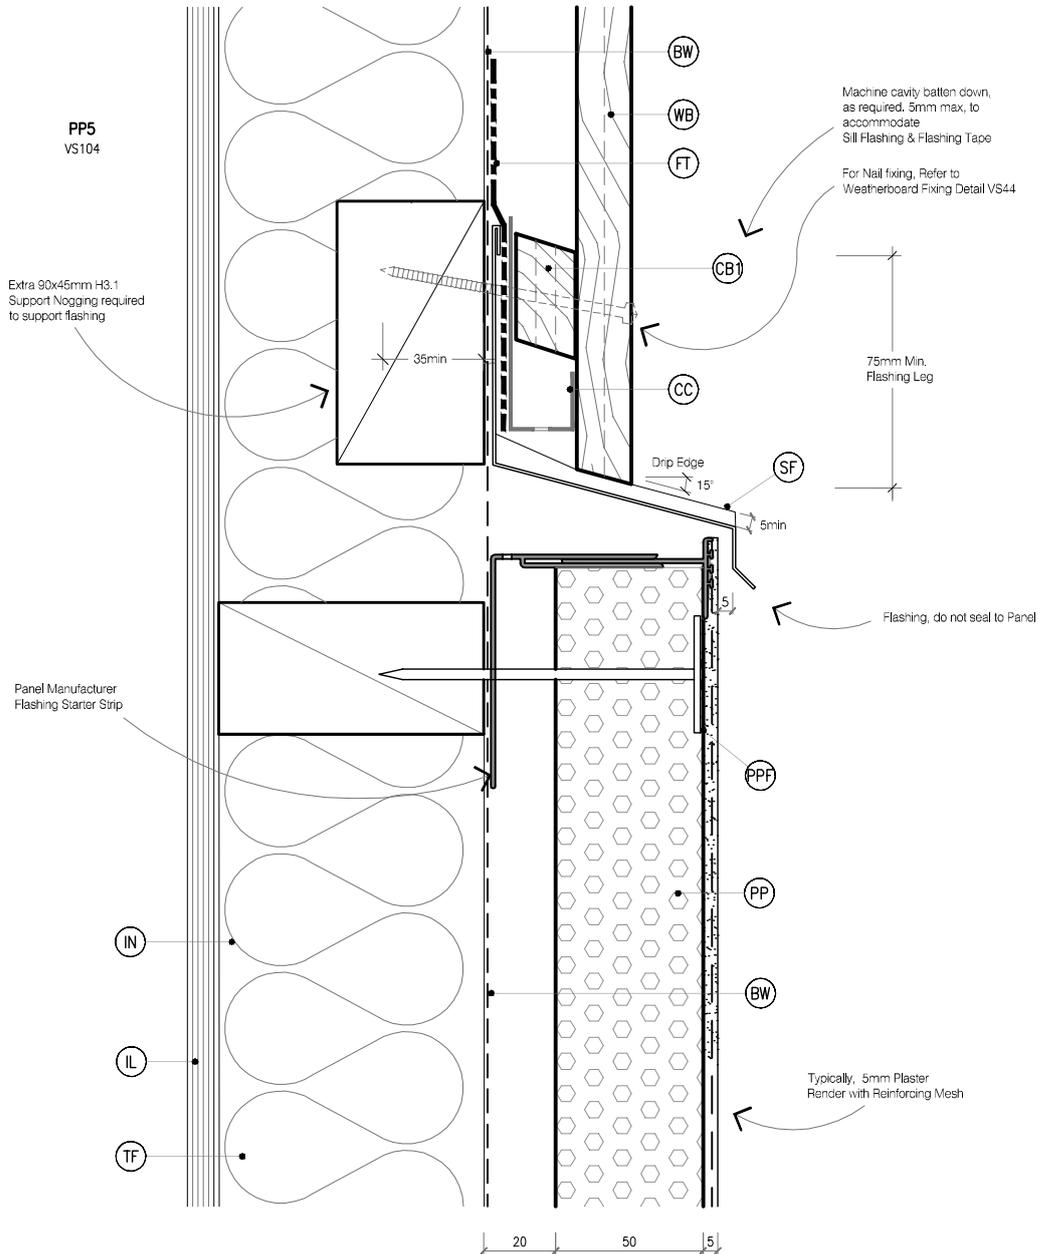

LEGEND:



SF SILL FLASHING: Continuous flashing on 15° min slope with turn back ends at end of walls. Materials as per E2/AS1 4.0 Typically 0.45mm Min 316 Stainless Steel.



BW BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)



PP PLASTER PANEL: Selected Insulated Facade Panel System. Typically 50mm Thick, fixed to 20mm vertical cavity batten



FT FLASHING TAPE: As per E2/AS1 4.3.11



PPF PLASTER PANEL FIXING: Specific designed panel fixing system. Install to manufactures instructions



CB1 CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity



CB2 CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or Castellated H3.2



HS HEAD SOFFIT SCRIBER: Southern Pine Eaves Mould EM40 x 27. Fix with 75 x 3.15mm 316 S.S nail in 2.5mm predrilled hole



CC CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding



WB WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617



ECF EXTERNAL CORNER FLASHING: 316 S.S Corner flashing. Refer NZBC E2/AS1 4.3. 125x75 Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150x100 Hem or Hook to Flashing Edges



ICF INTERNAL CORNER FLASHING: As per External Corner Flashing Hem & Hook flipped.



IL INTERNAL LINING: Selected Internal Lining




IN INSULATION: Selected Insulation



FF FLAT FLASHING: 316 Stainless Steel 100mm Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150mm Hem or Hook to Flashing Edges




TF TIMBER FRAME: H1.2 min treated timber framing

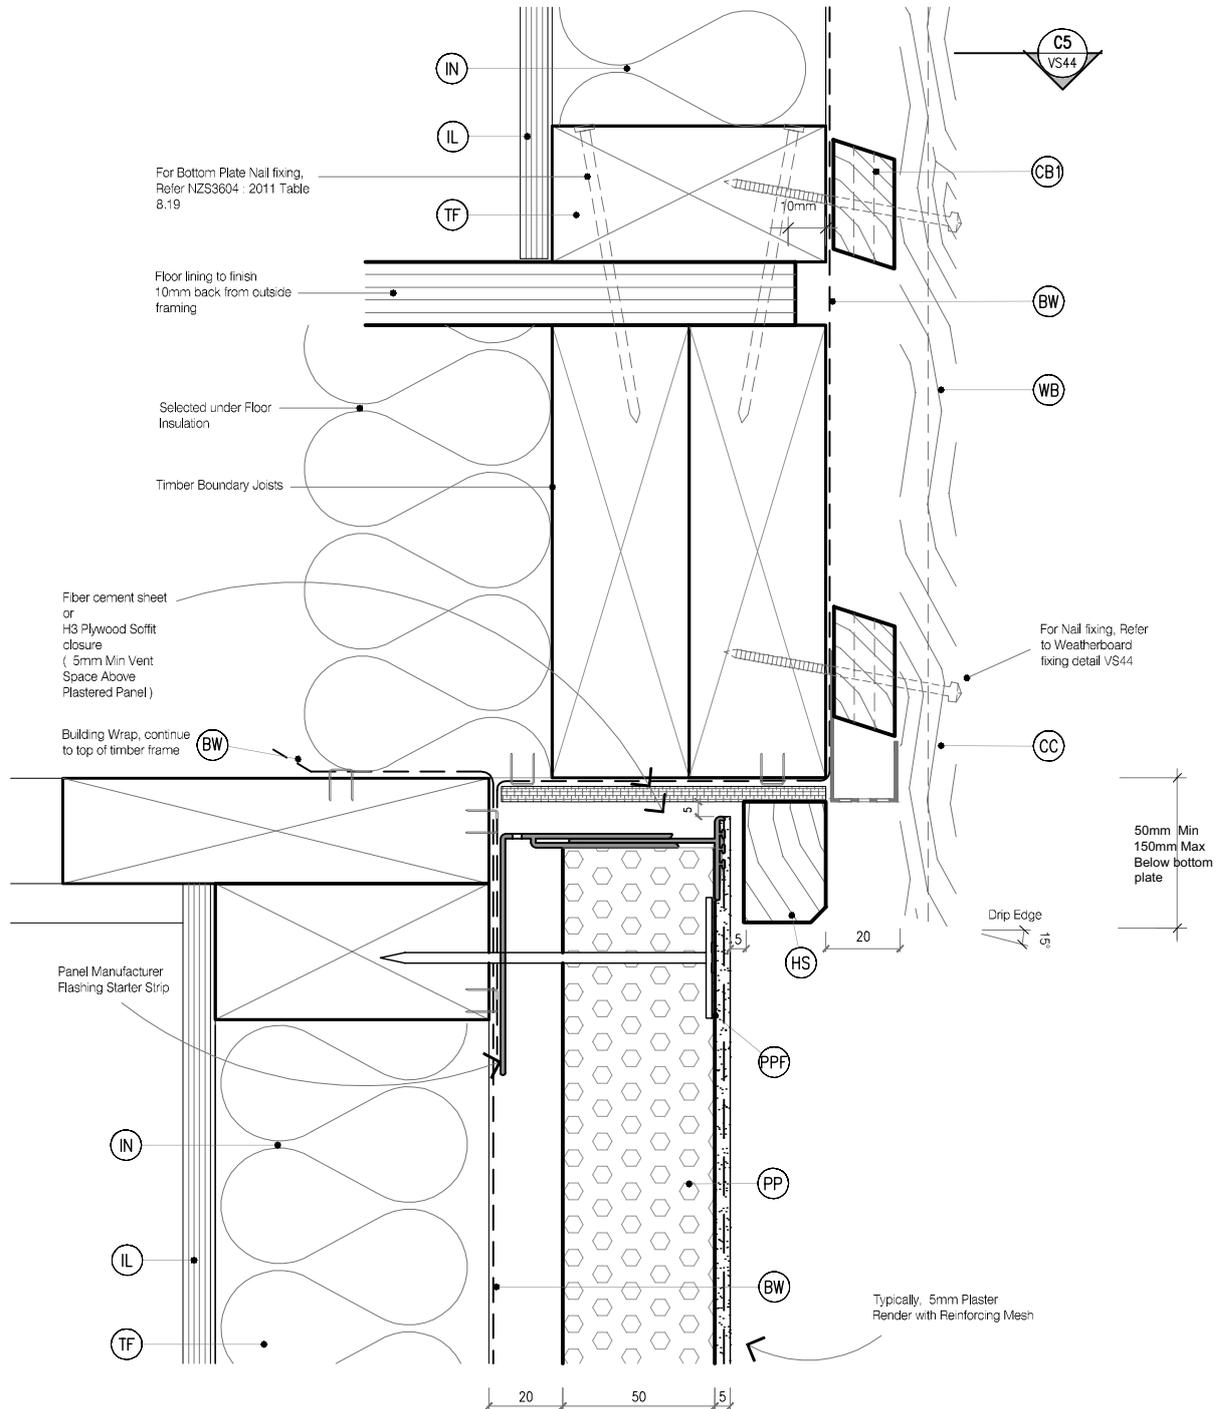

LEGEND:

- | | | |
|---|---|---|
| <p>(SF) SILL FLASHING: Continuous flashing on 15° min slope with turn back ends at end of walls. Materials as per E2/AS1 4.0 Typically 0.45mm Min 316 Stainless Steel.</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Ridgid Underlay required (9.1.7.2 E2/AS1)</p> <p>(PP) PLASTER PANEL: Selected Insulated Facade Panel System. Typically 50mm Thick, fixed to 20mm vertical cavity batten</p> <p>(FT) FLASHING TAPE: As per E2/AS1 4.3.11</p> <p>(PPF) PLASTER PANEL FIXING: Specific designed panel fixing system. Install to manufactures instructions</p> | <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or Castellated H3.2</p> <p>(HS) HEAD SOFFIT SCRIBER: Southern Pine Eaves Mould EM40 x 27. Fix with 75 x 3.15mm 316 S.S nail in 2.5mm predrilled hole</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> | <p>(ECF) EXTERNAL CORNER FLASHING: 316 S.S Corner flashing, Refer NZBC E2/AS1 4.3, 125x75 Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150x100 Hem or Hook to Flashing Edges</p> <p>(ICF) INTERNAL CORNER FLASHING: As per External Corner Flashing Hem & Hook flipped.</p> <p>(IL) INSULATION LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(FF) FLAT FLASHING: 316 Stainless Steel 100mm Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150mm Hem or Hook to Flashing Edges</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> |
|---|---|---|

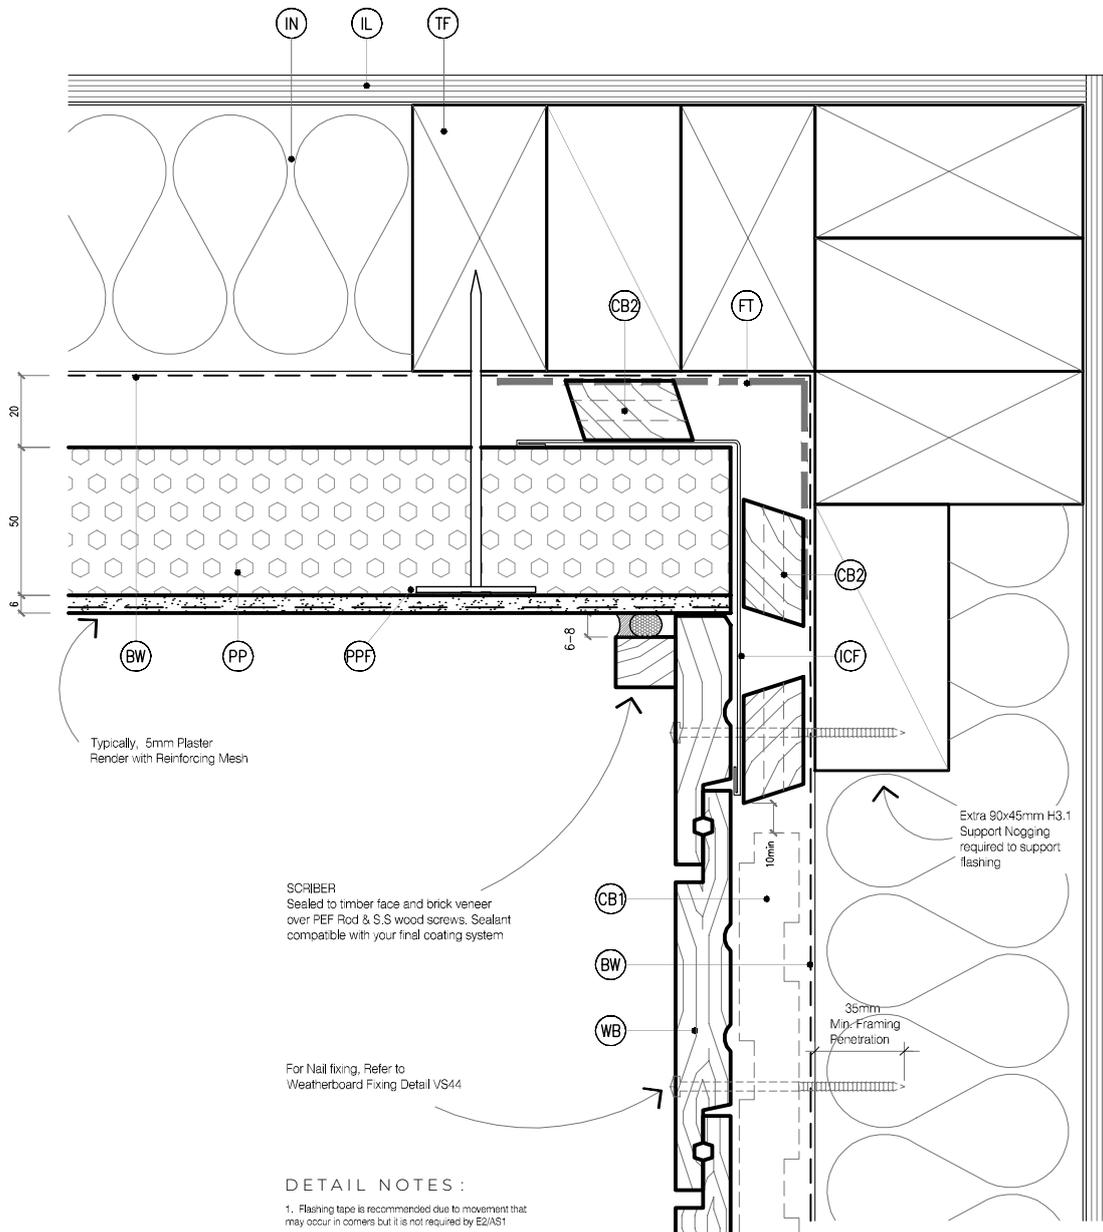


DETAIL NOTES :

1. Flashing tape is recommended due to movement that may occur in corners but it is not required by E2/AS1
2. Aluminium extrusion must not be continuous over solid floor joists.

LEGEND :


- | | | |
|---|--|---|
| <p>(SF) SILL FLASHING: Continuous flashing on 15° min slope with turn back ends at end of walls. Materials as per E2/AS1 4.0 Typically 0.45mm Min 316 Stainless Steel.</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)</p> <p>(PP) PLASTER PANEL: Selected Insulated Facade Panel System. Typically 50mm Thick, fixed to 20mm vertical cavity batten</p> <p>(FT) FLASHING TAPE: As per E2/AS1 4.3.11</p> <p>(PPF) PLASTER PANEL FIXING: Specific designed panel fixing system. Install to manufactures instructions</p> | <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castellated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or Castellated H3.2</p> <p>(HS) HEAD SOFFIT SCRIBER: Southern Pine Eaves Mould EM40 x 27. Fix with 75 x 3.15mm 316 S.S nail in 2.5mm predrilled hole</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> | <p>(ECF) EXTERNAL CORNER FLASHING: 316 S.S Corner flashing. Refer NZBC E2/AS1 4.3. 125x75 Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150x100 Hem or Hook to Flashing Edges</p> <p>(ICF) INTERNAL CORNER FLASHING: As per External Corner Flashing Hem & Hook flipped.</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(FF) FLAT FLASHING: 316 Stainless Steel 100mm Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150mm Hem or Hook to Flashing Edges</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> |
|---|--|---|

EXTERIOR JUNCTION PLASTER PANEL TO WEATHERBOARD

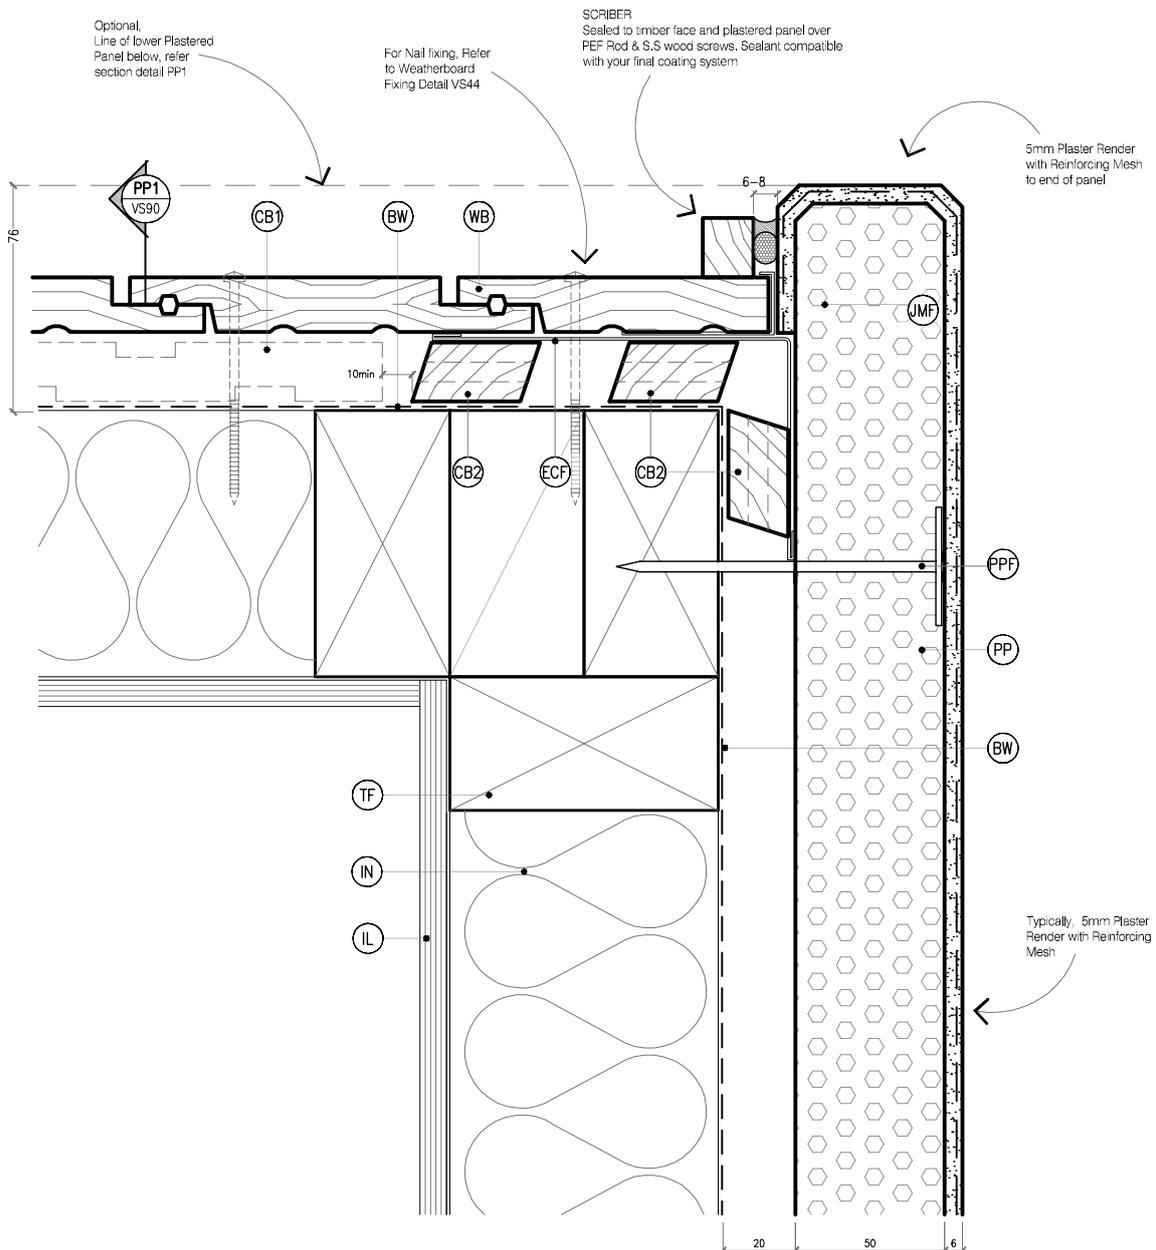


LEGEND:

- | | | |
|--|--|---|
| <p>(SF) SILL FLASHING: Continuous flashing on 15° min slope with turn back ends at end of walls. Materials as per E2/AS1 4.0 Typically 0.45mm Min 316 Stainless Steel.</p> <p>(BW) BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Ridgid Underlay required (9.1.7.2 E2/AS1)</p> <p>(PP) PLASTER PANEL: Selected Insulated Facade Panel System. Typically 50mm Thick, fixed to 20mm vertical cavity batten</p> <p>(FT) FLASHING TAPE: As per E2/AS1 4.3.11</p> <p>(PPF) PLASTER PANEL FIXING: Specific designed panel fixing system. Install to manufactures instructions</p> | <p>(CB1) CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL : 20mm x 45mm SP Radiata Pine H3.2, Castllated with a 18 degree bevelled slope. To form a 20mm cavity</p> <p>(CB2) CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or Castllated H3.2</p> <p>(HS) HEAD SOFFIT SCRIBER: Southern Pine Eaves Mould EM40 x 27. Fix with 75 x 3.15mm 316 S.S nail in 2.5mm predrilled hole</p> <p>(CC) CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding</p> <p>(WB) WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617</p> | <p>(ECF) EXTERNAL CORNER FLASHING: 316 S.S Corner flashing. Refer NZBC E2/AS1 4.3. 125x75 Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150x100 Hem or Hook to Flashing Edges</p> <p>(ICF) INTERNAL CORNER FLASHING: As per External Corner Flashing Hem & Hook flipped.</p> <p>(IL) INTERNAL LINING: Selected Internal Lining</p> <p>(IN) INSULATION: Selected Insulation</p> <p>(FF) FLAT FLASHING: 316 Stainless Steel 100mm Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150mm Hem or Hook to Flashing Edges</p> <p>(TF) TIMBER FRAME: H1.2 min treated timber framing</p> |
|--|--|---|

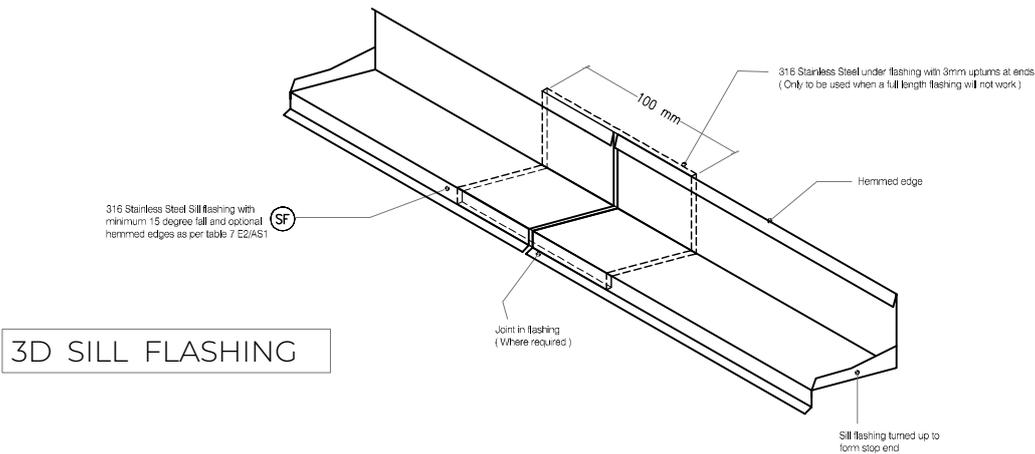



3D SILL FLASHING

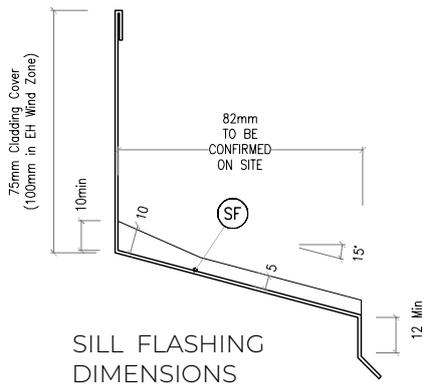

SILL FLASHING DIMENSIONS



INLINE FLASHING DIMENSIONS

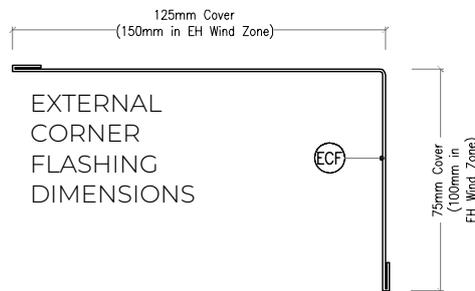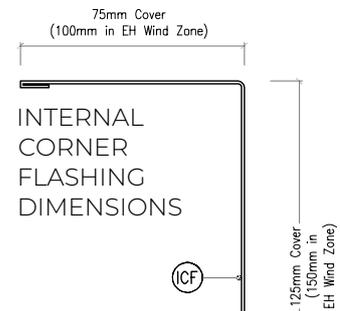

LEGEND:



SILL FLASHING: Continuous flashing on 15° min slope with turn back ends at end of walls. Materials as per E2/AS1 4.0 Typically 0.45mm Min 316 Stainless Steel.



BUILDING WRAP: Flexible Wall Underlay, As per NZBC E2/AS1 - Table 23, In extra high wind zones, Rigid Underlay required (9.1.7.2 E2/AS1)



PLASTER PANEL: Selected Insulated Facade Panel System. Typically 50mm Thick, fixed to 20mm vertical cavity batten



FLASHING TAPE: As per E2/AS1 4.3.11



PLASTER PANEL FIXING: Specific designed panel fixing system. Install to manufactures instructions



CAVITY BATTEN, HORIZONTAL - NON STRUCTURAL: 20mm x 45mm SP Radiata Pine H3.2, Castlled with a 18 degree bevelled slope. To form a 20mm cavity



CAVITY BATTEN, VERTICAL: 20mm x 45mm. To form a 20mm cavity. Standard H3.1 or Castlled H3.2



HEAD SOFFIT SCRIBER: Southern Pine Eaves Mould EM40 x 27. Fix with 75 x 3.15mm 316 S.S nail in 2.5mm predrilled hole



CAVITY CLOSURE: Cavity closure strip, positioned to give a 15mm Min drip edge to cladding



WEATHER BOARD: Southern Pine Vertical Shiplap Weatherboard. Profile to NZS 3617



EXTERNAL CORNER FLASHING: 316 S.S Corner flashing. Refer NZBC E2/AS1 4.3. 125x75 Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150x100 Hem or Hook to Flashing Edges



INTERNAL CORNER FLASHING: As per External Corner Flashing Hem & Hook flipped.



INTERNAL LINING: Selected Internal Lining



INSULATION: Selected Insulation



FLAT FLASHING: 316 Stainless Steel 100mm Hem or Hook to Flashing Edges. EXTRA HIGH WIND ZONE 150mm Hem or Hook to Flashing Edges



TIMBER FRAME: H1.2 min treated timber framing



info@sppnz.co.nz | 0800 999 321 | sppnz.co.nz